



Printer and
Fastener Solutions

SYSTEM ADMINISTRATOR'S GUIDE



**Avery Dennison®
Monarch® FreshMarx®
9417+ Solution**

TC9417PSA Rev. AA 9/16
© 2016 Avery Dennison Corp.
All rights reserved.

Each product and program carries a respective written warranty, the only warranty on which the customer can rely. Avery Dennison reserves the right to make changes in the product, the programs, and their availability at any time and without notice. Although Avery Dennison has made every effort to provide complete and accurate information in this manual, Avery Dennison shall not be liable for any omissions or inaccuracies. Any update will be incorporated in a later edition of this manual.

©2013 Avery Dennison Corporation. All rights reserved. No part of this publication may be reproduced, transmitted, stored in a retrieval system, or translated into any language in any form by any means, without the prior written permission of Avery Dennison.

WARNING

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

CANADIAN D.O.C. WARNING

This digital apparatus does not exceed the Class A limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications. Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la classe A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.

Trademarks

FreshMarx®, Monarch®, and Avery Dennison® are registered trademarks of Avery Dennison Corporation

Avery Dennison
170 Monarch Lane
Miamisburg, OH 45342



TABLE OF CONTENTS

INTRODUCTION	1-1
Audience	1-1
About the Printer	1-1
About the Setup Wizard	1-3
Using the Keypad	1-3
About Assigning Formats	1-4
About Freshness Labeling	1-4
About Button Modes	1-5
Timer Button Mode	1-5
Video Button Mode	1-5
Document Button Mode	1-5
Label & Video Button Mode	1-5
Label & Document Button Mode	1-5
Button Mode Icons	1-5
SETTING THE TIME AND DATE	2-1
Adjusting the Time and Date	2-1
Formatting the Time and Date	2-3
SETTING UP THE PRINTER	3-1
Adjusting the Print Settings	3-1
Adjusting the Screen Brightness	3-3
Changing the Administrator's Password	3-3
Setting the Options	3-4
Adjusting the Language Settings	3-5
Selecting a System Language	3-5
Alternate Button Names	3-6
Adjusting the Network Settings	3-7
Wireless Settings	3-7
To automatically obtain an IP Address:	3-8
To enter an IP Address:	3-8
Selecting your Network Time Server	3-9

EDITING PRODUCT DATA	4-1
Entering Edit Mode	4-1
Adding and Removing Products	4-2
To add a product button:.....	4-2
To remove a product button:	4-5
Editing Product Descriptions	4-5
Editing the Use First Button	4-6
Editing Category Buttons	4-7
Assigning a Label Format.....	4-8
Editing Tab Names	4-9
Adding Timers	4-10
Exiting Edit Mode	4-12
BATCH PRINTING	5-1
Creating a Batch	5-1
Editing a Batch.....	5-3
Renaming a Batch	5-4
Deleting a Batch.....	5-4
UPDATING THE PRINTER	6-1
Updating Your Product Data File via USB	6-1
Updating Your Application Software via USB	6-2
Updating the Printer via FTP	6-3
Automatically Check for Updates	6-4
Allow Automatic Updates	6-5
Share FTP Update Settings.....	6-5
Set Printer as Update Provider.....	6-6
Updating Videos	6-6
Video Specifications	6-6
Transferring Videos to/from the Printer	6-7
Updating Documents.....	6-8
Document Specifications.....	6-8
Transferring Documents to/from the Printer	6-9
Updating Formats	6-10
PERFORMING MAINTENANCE	7-1
Printing Diagnostic Labels.....	7-1
Version Information	7-2
Network Information	7-2
Gray Scale	7-2
Checkerboard	7-2
Copying the Data File to a USB Flash Drive.....	7-3
Calibrating the Supply.....	7-4
Calibrating the Sensor	7-5
Calibrating the Touch Screen	7-6
Performing a Factory Reset.....	7-7

LABEL FORMATS..... 1

Format 1 1

Format 2 1

Format 3 2

Format 4 2

Format 5 3

Format 6 3

Format 7 4

Format 8 5

Format 10 6

Format 11 6

Format 12 7

Format 20 7

Format 21 8

Format 22 9

Format 30 10

Format 31 11

Format 32 12

Format 40 13

Format 41 14

Format 42 15

Format 43 16

INTRODUCTION

Use the Avery Dennison® Monarch® FreshMarx® 9417+ solution for product freshness and to label inventory.

You may have a custom application that differs slightly from the examples in this manual. The screens and labels shown are for reference only of the dual printer.

This manual describes the features available in Version 3.0.

Audience

This manual is for the System Administrator who configures and updates the printer. For information on using the EasyEdit+ Utility, refer to the *EasyEdit+ System Administrator's Guide*. For information on printing labels and the printer's care and maintenance, refer to the *Operator's Handbook*.


About the Printer

The printer has a touch screen and a built-in FreshMarx application. The printer is available as a single printer (left printer only) or dual printer (left and right printer).

The printer includes 21 standard formats. You can configure the dual printer to print one size supply on the Left printer and a different size supply on the Right printer. If your dual printer application only uses one size supply, you could configure the printer to print all formats on the Left printer and use the Right printer as a backup.

The following table describes additional documentation for the 9417++ printer:

Item	Description
<i>Quick Reference</i>	Includes basic start-up information such as supply loading, cleaning and minor troubleshooting.
<i>Operator's Handbook</i>	Includes information about using the printer's application, loading supplies, printing labels, and more.
<i>EasyEdit+ System Administrator's Guide</i>	Includes information about using the EasyEdit+ application to create a product data file and select specific printer settings.
<i>LNT Programmer's Manual</i>	Includes information about designing a Language Neutral Template (LNT) file.

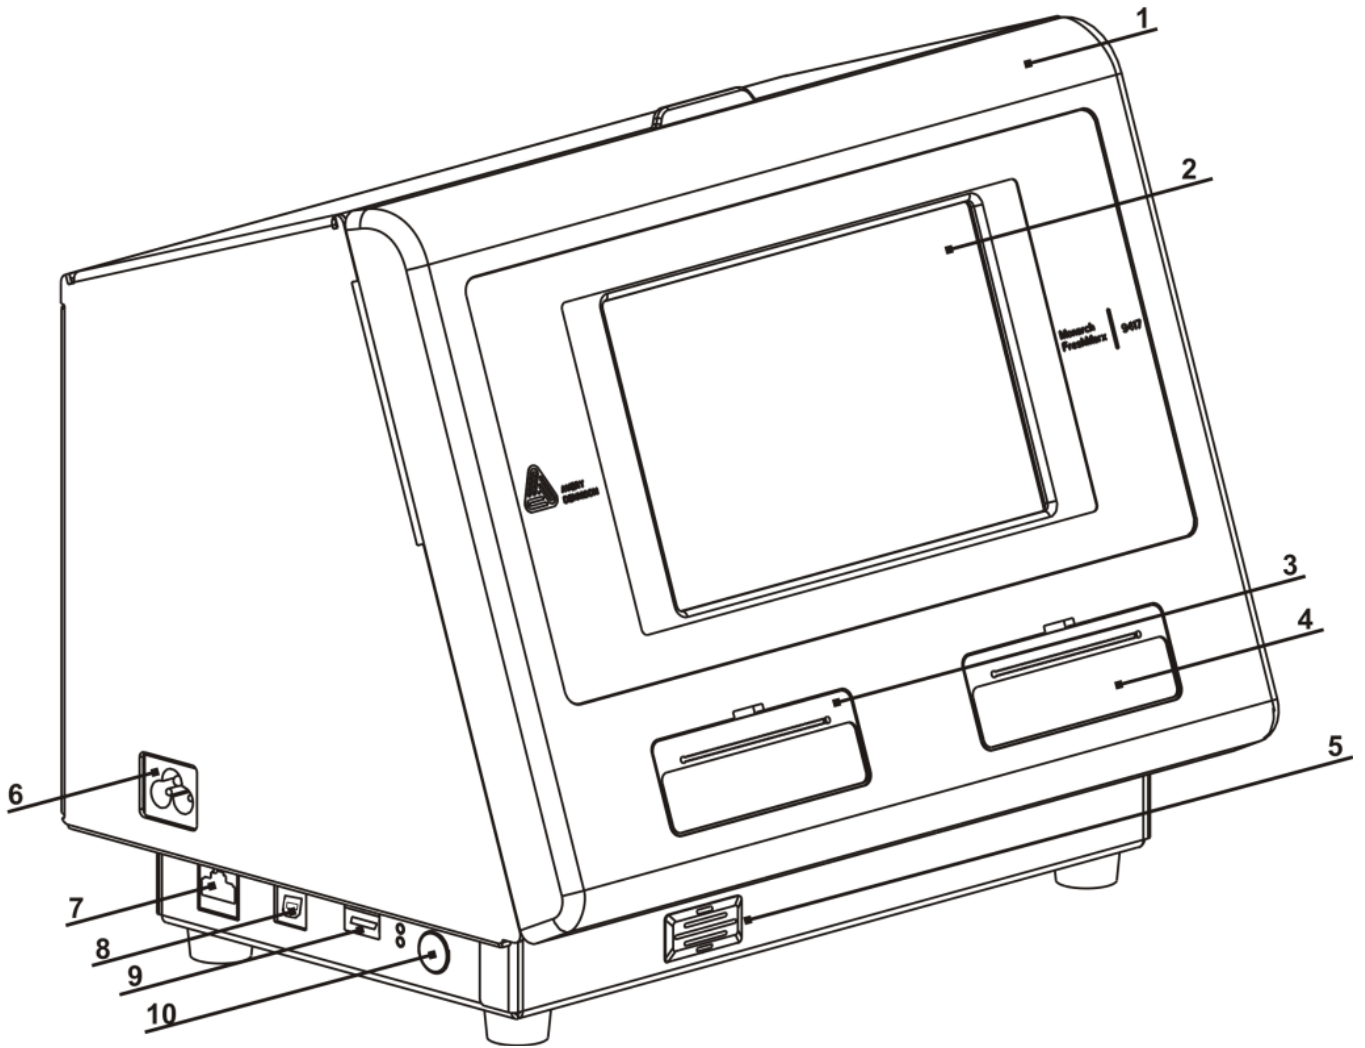







1	Cover	6	Power Cord Connection
2	Display	7	Ethernet Port
3	Left Printer	8	USB (Type B) Port
4	Right Printer	9	USB (Type A) Port
5	Speaker	10	Power Button

About the Setup Wizard


When the 9417+ printer is powered on for the first time or after updating the software, a setup wizard appears. The wizard guides you through important tasks such as setting the printer's language and setting the time and date. An administrator can run the setup wizard at any time by selecting Tools, Admin, System Settings, Startup Wizard.

Using the Keypad

- ◆ The default keypad is lowercase alphabetic. Press  (**Shift**) to use uppercase alphabetic characters.
- ◆ Press  to use numeric characters or symbols. Press  to see the second page of symbols; press  to return to the first page of symbols. Press  to return to the lowercase alphabetic keypad.

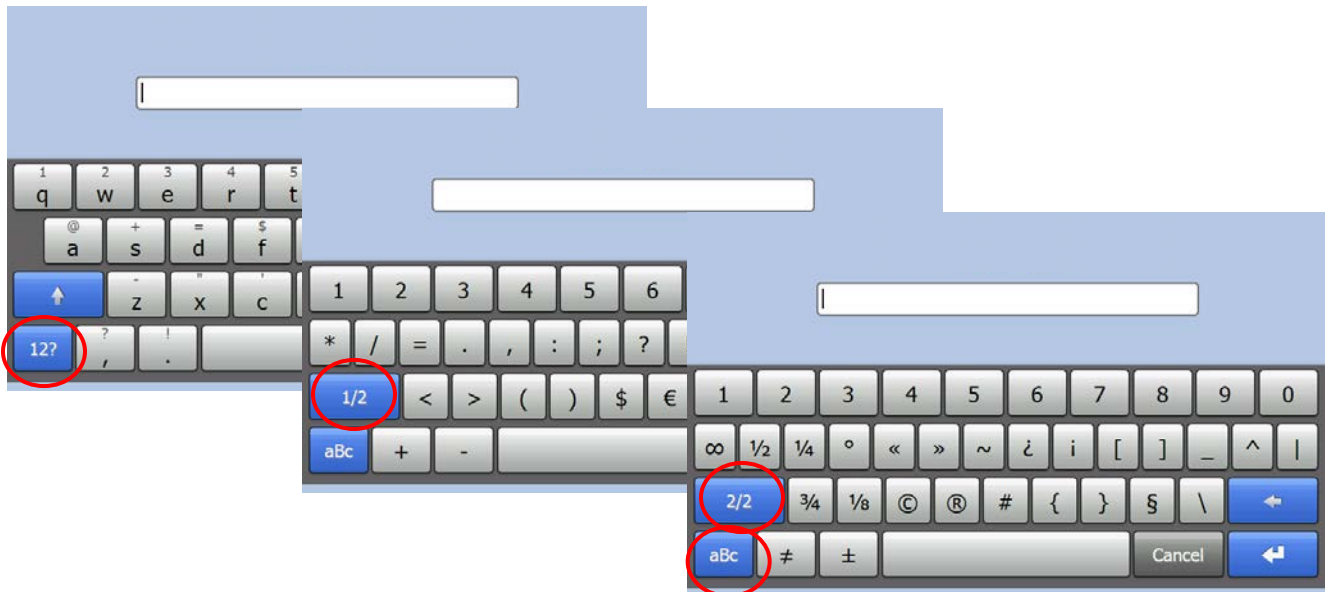

- ◆ Press and hold a key to use symbols and accented characters.

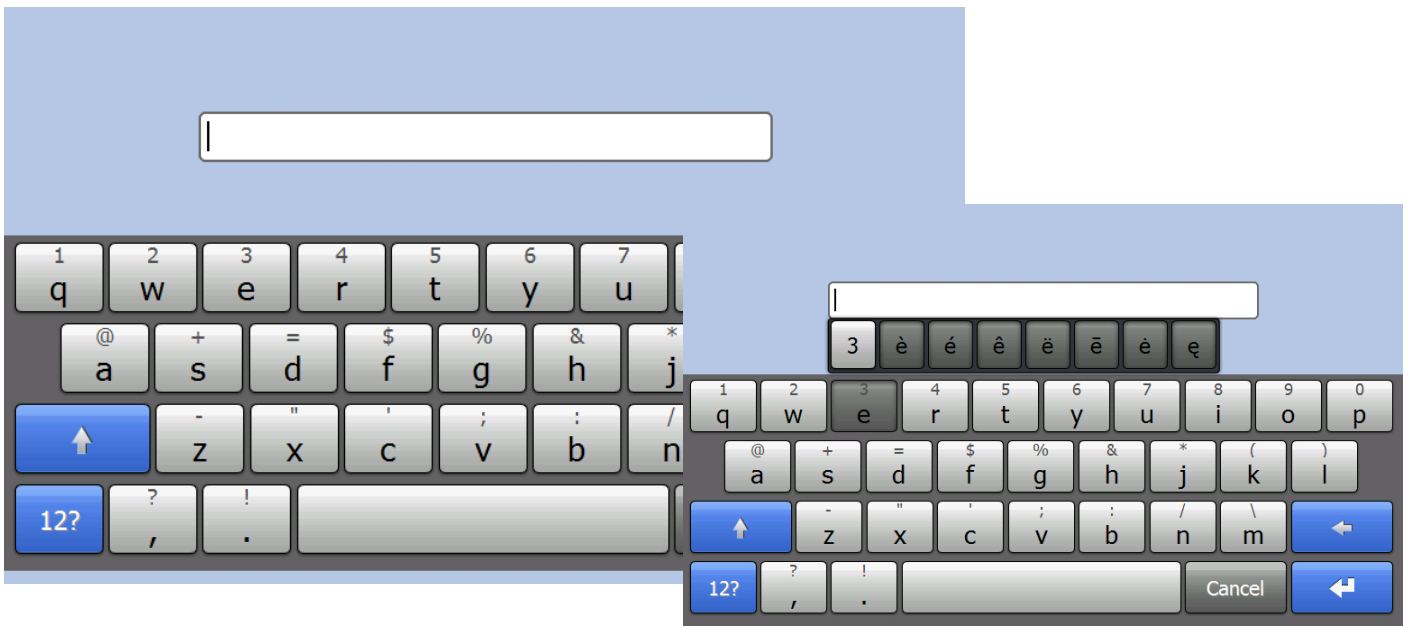

About Assigning Formats

The Freshmarx application includes 21 standard formats for food freshness dating, nutrition, and grab-and-go labeling. See Appendix A, "[Standard Label Formats](#)" for information on each format and a sample image. Formats are assigned when you create a category button. Freshmarx includes six categories to group your items. Only one format is assigned to a category.

Example categories are:

- ◆ Breakfast, Salad, Ingredients, etc.
- ◆ A - B, C – G, H – K, etc.
- ◆ Nutrition, Ingredient, Freshness, Grab-and-go, etc.
- ◆ Labels, Videos, Documents, Timers, etc. (See "[About Button Modes](#)")

Note: If you select a format larger than the loaded labels, some information may not print.

About Freshness Labeling

The Freshmarx date coding system calculates expiration dates/times based on each item's entered Use By Duration. When you create a product button enter the Use By Duration, Freshmarx calculates an expiration to print on the labels. The default mode prints the date and time on the label.

Freshmarx includes options to customize the printed expiration information, such as:

"End of Day" expiration mode Use for products that expire at the end of each day or in a set number of days. Only the date is printed, not the time.
Enter Must Use By Duration values in days. The printer ignores anything entered in the hours and minutes fields.
For example, 0 days expires today; 1 day expires tomorrow, etc.

<i>End of Day Expiration</i>	0 Day Expiration	1 Day Expiration	2 Day Expiration
Current Date: 09/01/16	End of Day 09/01/16	End of Day 09/02/16	End of Day 09/03/16

Print "End of Day" on Label. Enables or disables printing the words "End of Day" on the label when using "End of Day" expiration mode.

Custom Use By Description Default text is "MUST USE BY". This can be modified to print a custom description, such as "BEST BEFORE".

Date & Time of Print	Use By Duration	Default Expiration	End of Day Expiration Mode	Print End of Day	Custom Use By Description
09/01/16 10:21 AM	1Day 1 Hour 15 Minutes	Sample Product 1 Description 2 Description 3 MUST USE BY 11:36 AM 09/02/16	Sample Product 2 Description 2 Description 3 MUST USE BY 09/02/16	Sample Product 2 Description 2 Description 3 MUST USE BY END OF DAY 09/02/16	Sample Product 2 Description 2 Description 3 BEST BEFORE 11:36 AM 09/02/16

Note: The sample labels above were created using Format 1.

About Button Modes

Product buttons can have different modes (function). Button mode is set on the Button Properties screen when you create or edit a product button.

For more information, refer to the *EasyEdit+ System Administrator's Guide* and *9417+ Operator's Handbook* found on our Web site

The button modes are:

Timer Button Mode

Create a timer product button to initiate a timer on the printer. Use the Button Properties screen to set the timer duration.

Video Button Mode

Create a video product button to play a video on the printer. Use the Button Properties screen to link the button to the video.

Document Button Mode

Create a document product button to view a document on the printer. Use the Button Properties screen to link the button to the document.

Label & Video Button Mode


Label & video product buttons' primary function is to print labels. When the button is pressed, the label quantity screen opens. Press Play Video to play the video before printing labels. After the video plays, the print quantity screen is shown.

Label & Document Button Mode

Label & document product buttons' primary function is to print labels. When the button is pressed, the label quantity screen opens. Press View Document to view the document before printing labels. After the document is closed, the print quantity screen is shown.

Button Mode Icons

While in Edit Mode, product buttons appear as shown:

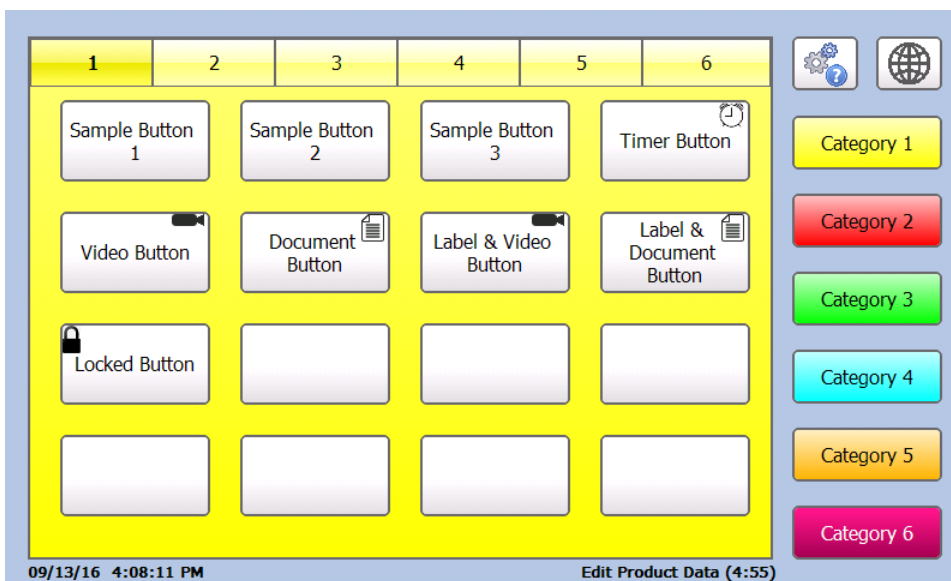


- ◆ Timer, video, and document buttons have icons in the top right corner of the button so users' know the button's function.
- ◆ Label buttons are the default; they do not have an indicator.
- ◆ Label & video and label & document buttons do not have an icon because the button's primary function is to print a label. As a secondary function the user can view a video or a document.

SETTING THE TIME AND DATE


Adjusting the Time and Date

You can set the system time and date, format the time and date, select your time zone, and establish network time.


1. Press  (**Tools**).

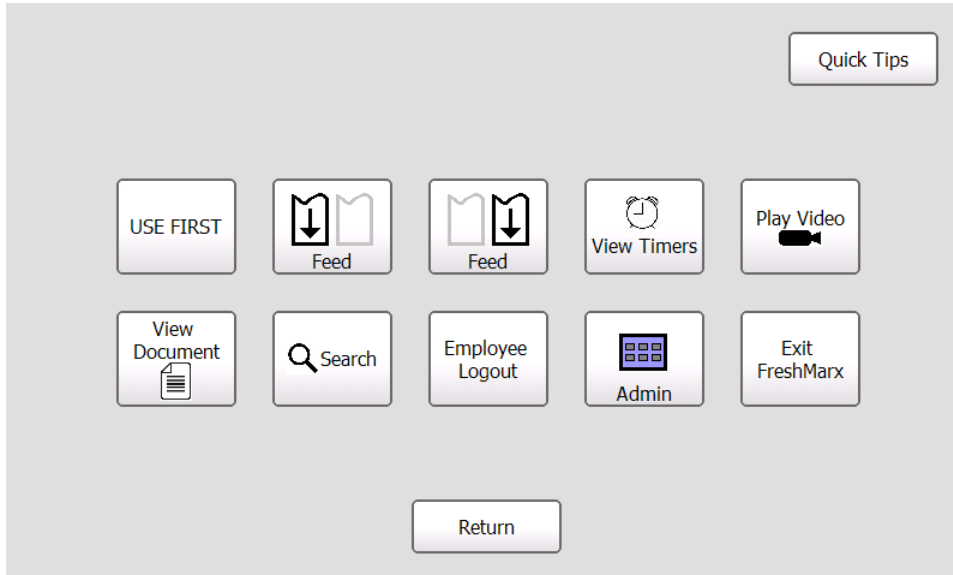

2. Press **Admin**.

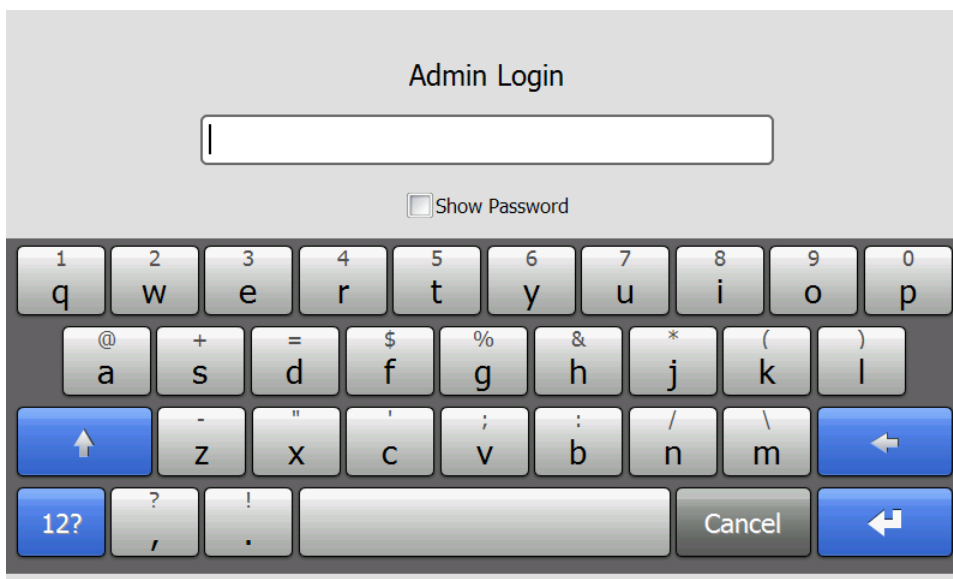


3. Enter the Admin password and press  (**Enter**). The default password is **1234**.

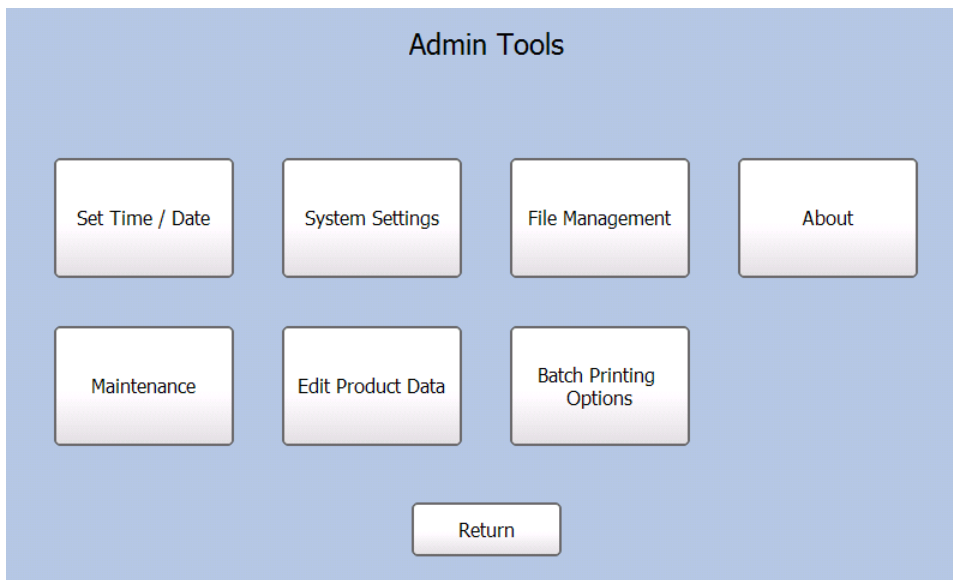

4. Press **Set Time / Date**.

Use ◀ and ▶ to set the time and date.

Touch **AM/PM** to toggle the setting between AM and PM.

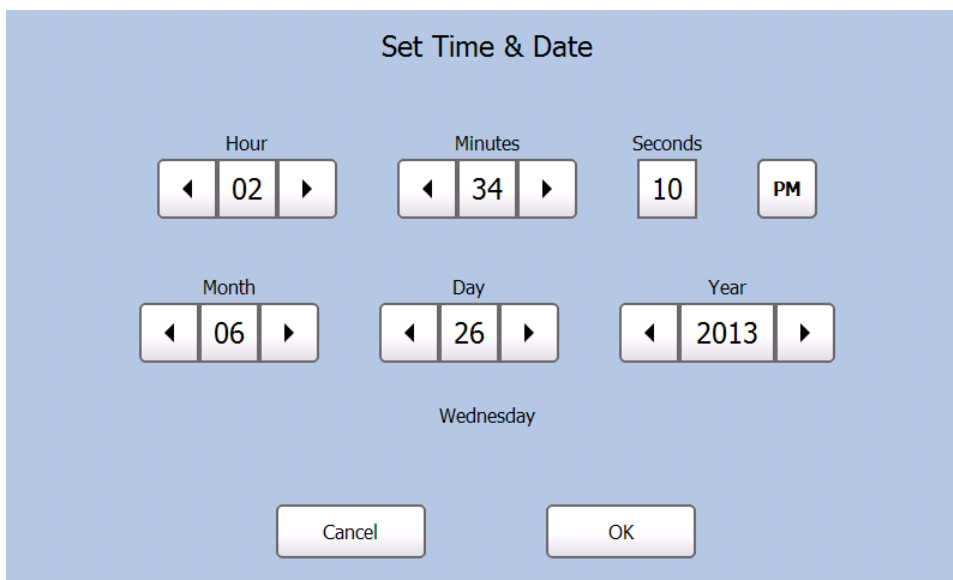


5. Press **OK** when you are finished.


Formatting the Time and Date

To change the way the time/date appears on printed labels:

1. From the *Admin Tools* screen, press **System Settings**.

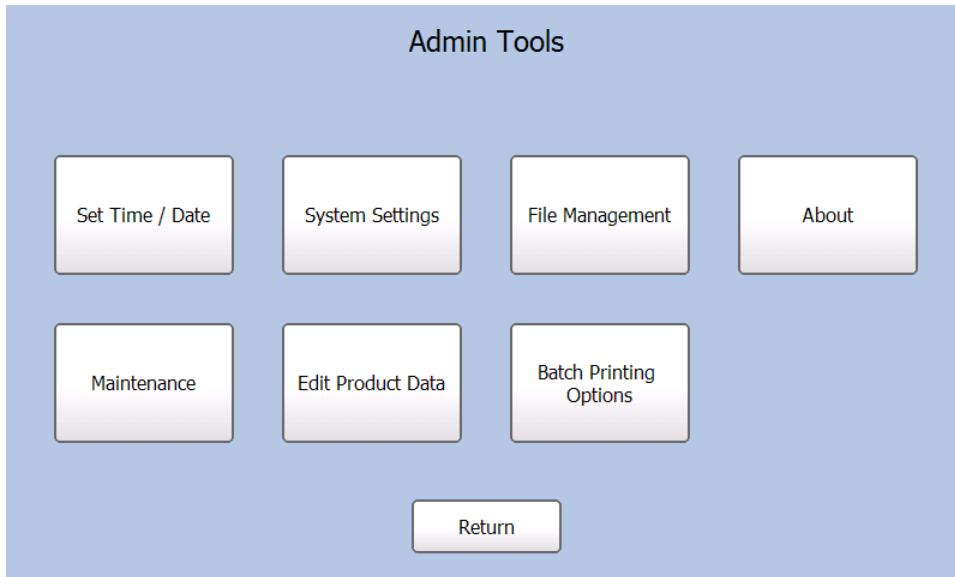

2. Press **Format Time / Date**.

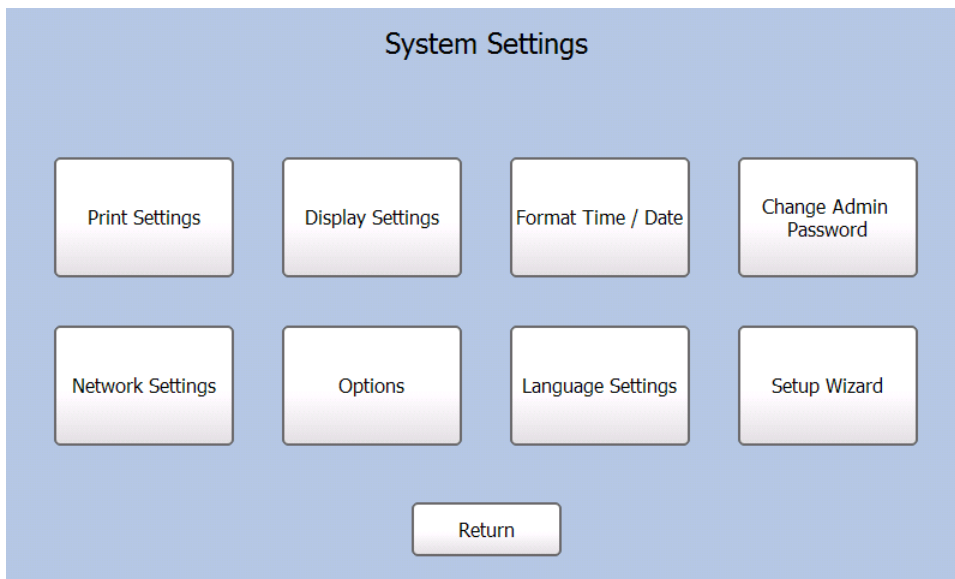

3. Select the checkbox if you want to use a 24-hour clock. For example, 4:00 p.m. would appear as 16:00. Use the drop down menu to select the time separator to place between the hour, minute, and seconds (colon, period, comma, blank).

Format Time / Date

Time Settings
Format: Use 24 Hour Clock
Separator: : (colon)

Date Settings
Format: MM/DD/YY
Separator: / (slash)

Time Zone
(GMT-05:00) Eastern Time (US & Canada)

Automatically adjust clock for Daylight Savings Time

Cancel OK

4. Use the drop down menus to select the date format and the date separator (slash, hyphen, period, comma, blank). The date separator is placed between the year, month, and day.

Format Time / Date

Time Settings
Format: Use 24 Hour Clock
Separator: : (colon)

Date Settings
Format: MM/DD/YY
Separator: / (slash)

Time Zone
(GMT-05:00) Eastern Time (US & Canada)

Automatically adjust clock for Daylight Savings Time

Cancel OK


5. Use the ◀ and ▶ buttons to select your Time Zone.
6. Select the checkbox if you want the printer to automatically adjust the time for Daylight Saving Time.
7. Press **OK** when you are finished.

SETTING UP THE PRINTER


Adjusting the Print Settings

You can adjust the horizontal (X) and vertical (Y) print position of data on a label and set the print contrast. The Contrast controls the darkness of the printing.

1. Press  (**Tools**).

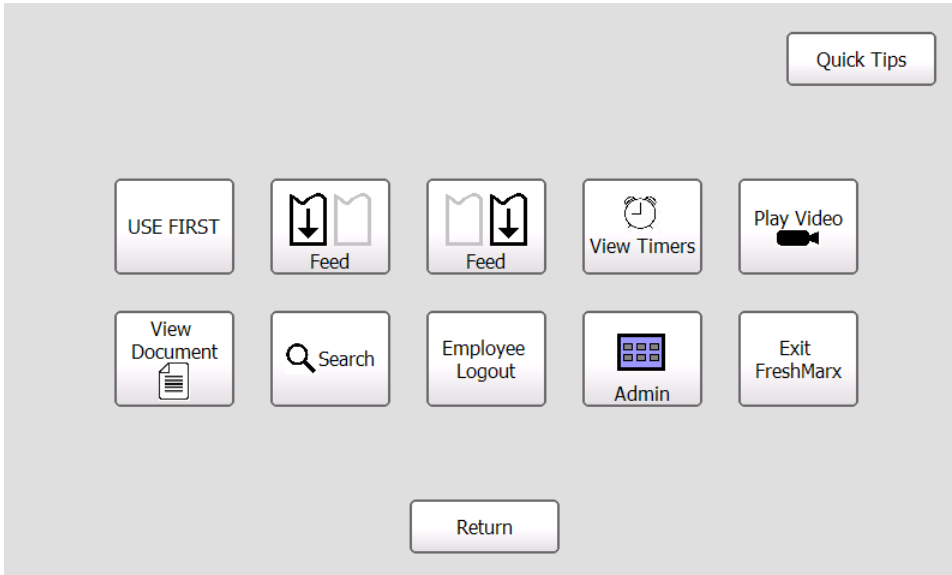


2. Press **Admin**.

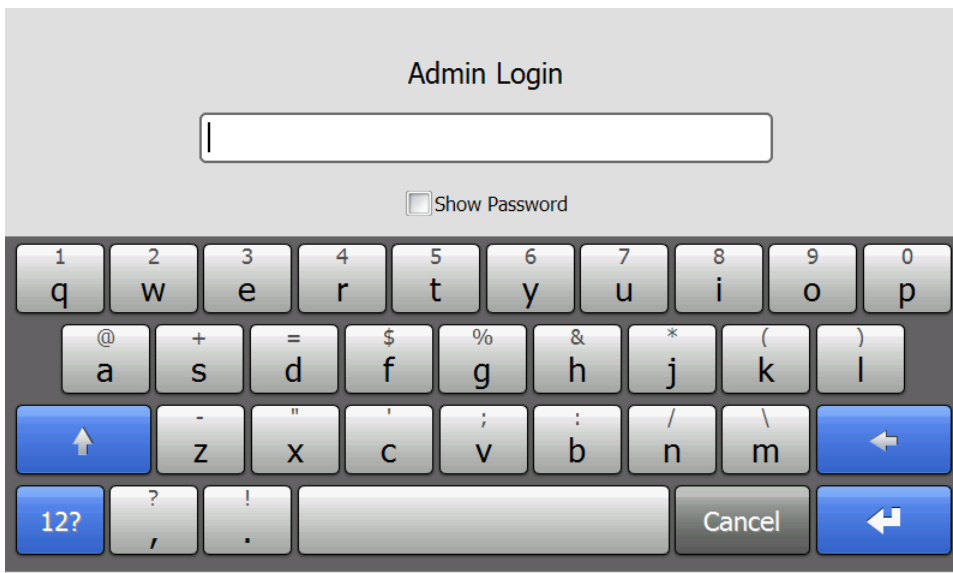


Note: Select **Show Password** to see the characters while entering the password.


3. Enter the Admin password and press  (**Enter**). The default password is **1234**.

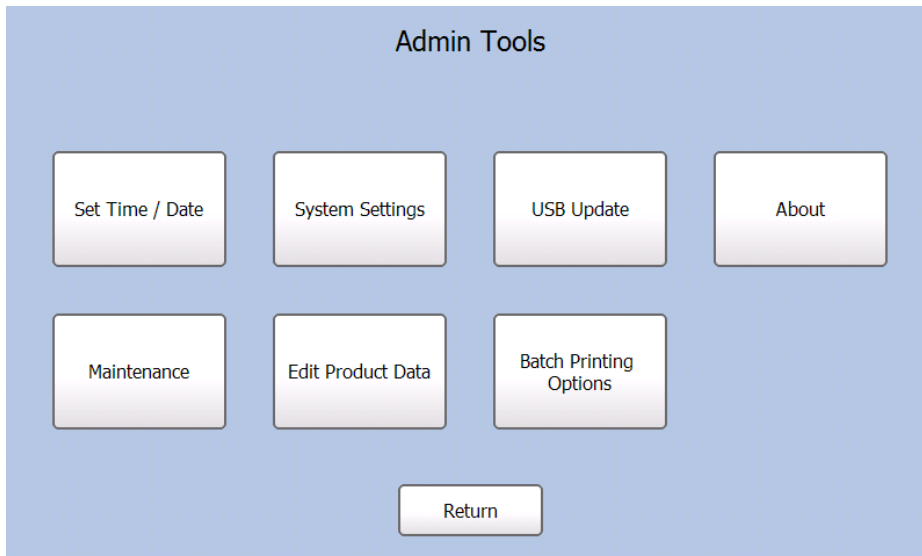

4. Press **System Settings**.

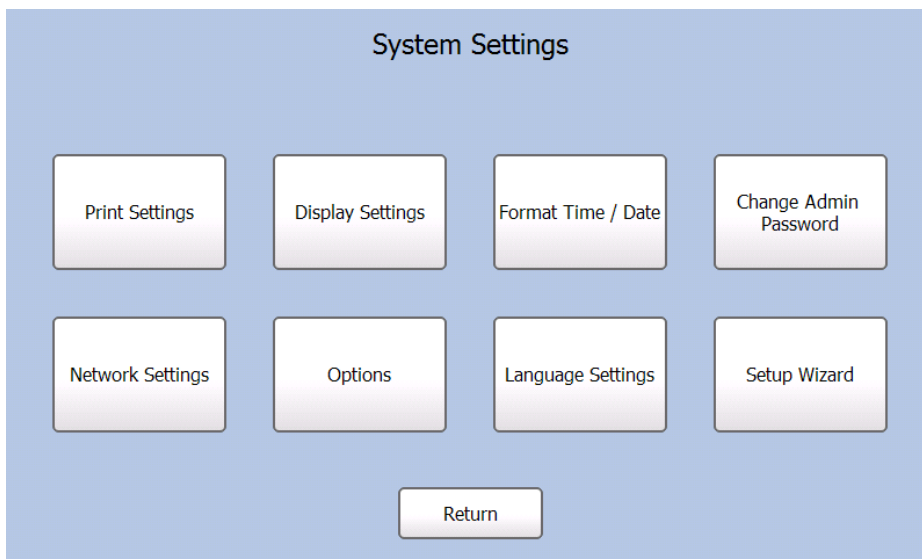

5. Press **Print Settings**. Adjust the print settings for the Left and Right Printer:

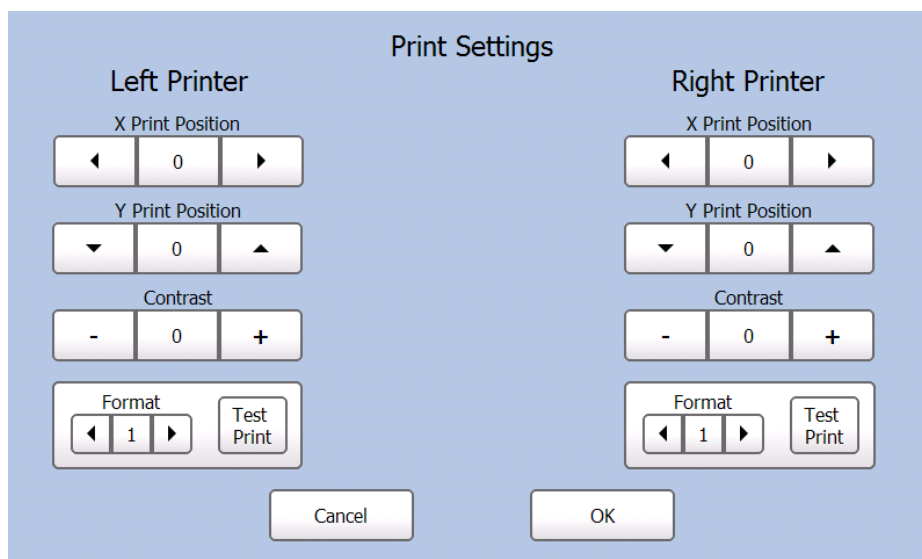


6. Use the ◀ and ▶ buttons to adjust the X Print Position. Increasing the value moves the printed text to the right. Decreasing the value moves the printed text to the left. The range is -100 to 100 and the default is 0.
7. Use the ▼ and ▲ buttons to adjust the Y Print Position. Increasing the value moves the printed text up. Decreasing the value moves the printed text down. The range is -128 to 127 and the default is 0.
8. Use the - and + buttons to adjust the Contrast. Increasing the value makes the print darker. Decreasing the value makes the print lighter. The range is -100 to 100 and the default is 0.
9. Use the ◀ and ▶ buttons to select a format and click **Test Print** to check your print settings. The label prints. Make adjustments if necessary. See Appendix A, “Label Formats” for the size and content of each format.
10. Press **OK** when you are finished.

Adjusting the Screen Brightness

You can adjust the brightness of the screen. The range is 0 to 100 percent.


1. From the *Admin Tools* screen, press **System Settings**.
2. Press **Display Settings**.

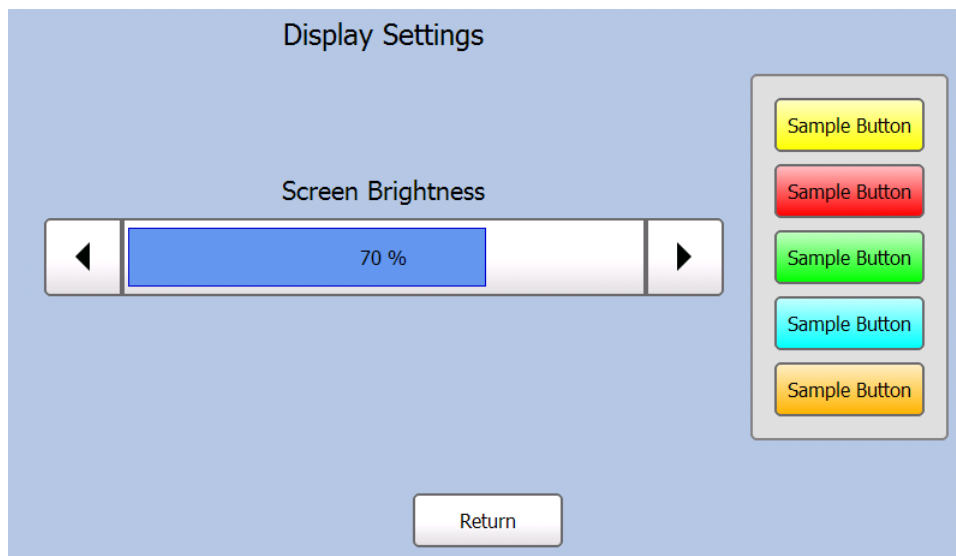

3. Use ◀ and ▶ to adjust the screen brightness. The Sample Buttons at the right show how the colors appear at the various brightness settings.
4. Press **Return** when you are finished.

Changing the Administrator's Password

To change the administrator's password:

1. From the *Admin Tools* screen, press **System Settings**.
2. Press **Change Admin Password**.
3. Enter the new password. As you enter the password, the characters are replaced with “*” in the text. Select **Show Password** if you want the characters to appear in the text box.
4. Press  (**Enter**). The password has been changed. Make a note of your new password. If you forget your password, call Service.

Setting the Options

The options allow users to enable/disable employee login, recreate an old label, and enter a local store address.

Enable Employee Login

Prompts users for an employee login. Login must be 2-10 alphanumeric characters. The ID displays on the screen and prints on freshness labels.



Recreate Label


Users may need to reprint a freshness label if a label is torn or missing from a product. The user enters the *original* Use By time and date.

Note: An asterisk (*) prints after the date or time, indicating a reprinted label.

Use local store address/phone number


Users may need to print a local store address and/or phone number on their labels. An address and/or phone number entered at the printer overrides information entered using EasyEdit+.

1. From the *Admin Tools* screen, press **System Settings**.

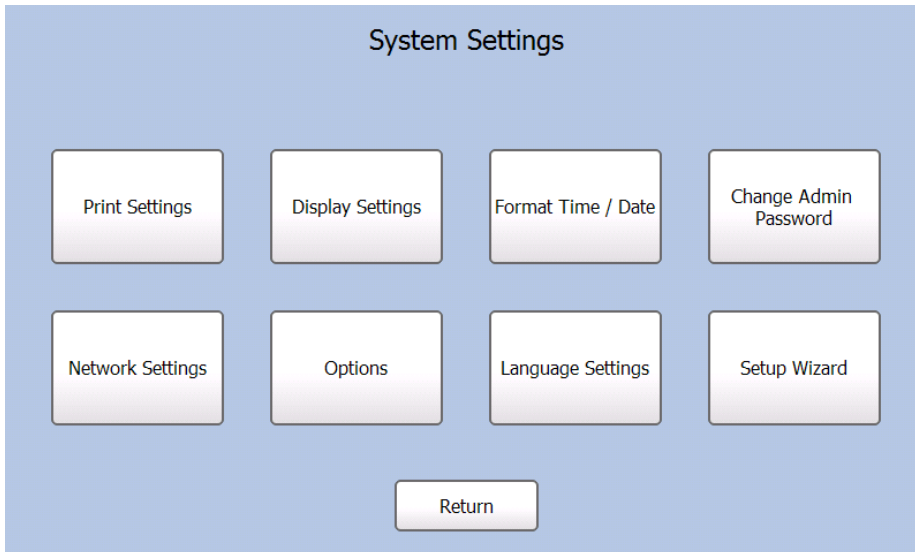

2. Press **Options**.


3. Select the options you need. Press **OK**.

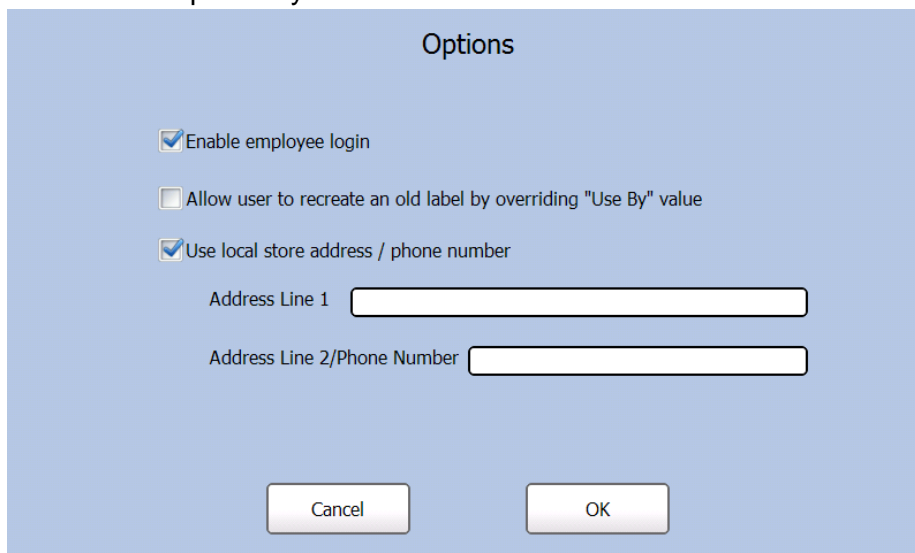


Adjusting the Language Settings

Use the Language Settings menu to set a primary system language, enable/disable alternate button names, and set an alternate system language.

1. Press  (**Tools**).
2. Press **Admin**.
3. Enter the Admin password and press  (**Enter**). The default password is 1234.
4. Press **System Settings**.

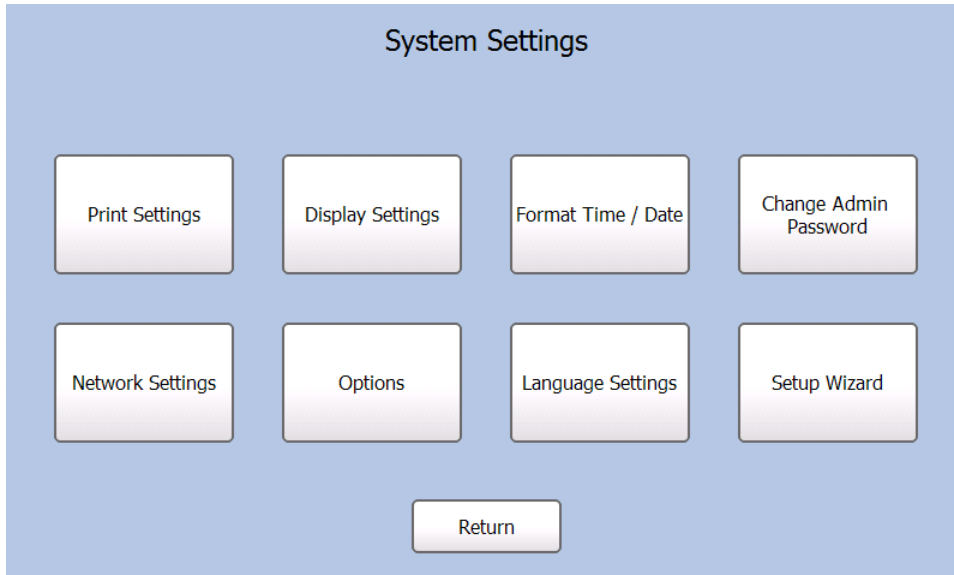

5. Press **Language Settings**.

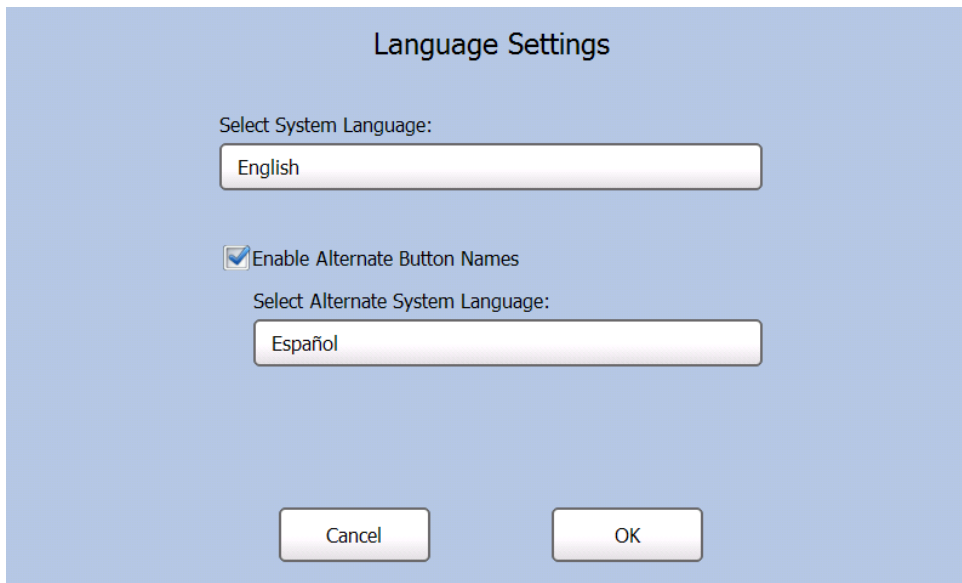


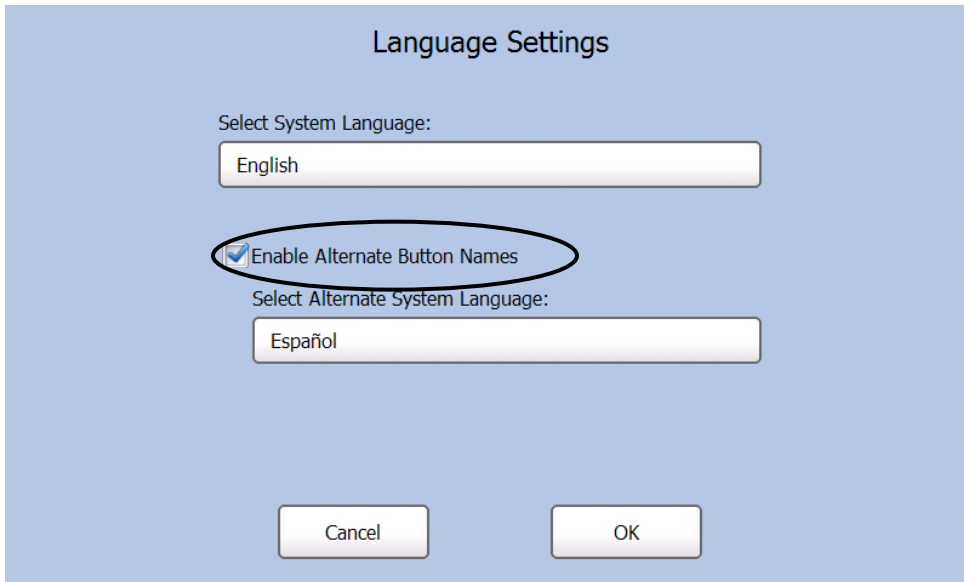
Selecting a System Language

Press the language box under Select System Language to select a System Language. The system language is the language you want to use for all printer prompts and buttons.

Alternate Button Names

When you enable alternate button names, you can enter the product button names in a second language (Alternate System Language).


Press  (**Language Toggle**) to switch between the primary and secondary languages.



The image shows a 'Language Settings' dialog box. It has a title bar 'Language Settings'. Below the title bar, there is a label 'Select System Language:' followed by a text box containing 'English'. Below that is a checkbox labeled 'Enable Alternate Button Names' which is checked and circled in black. Below the checkbox is a label 'Select Alternate System Language:' followed by a text box containing 'Español'. At the bottom of the dialog are two buttons: 'Cancel' and 'OK'.


Alternate System Language


With alternate button names enabled, press the language box under Select Alternate System Language. The Alternate System Language is the secondary language in which all printer prompts and buttons appear.

Press  (**Language Toggle**) to switch between the primary and secondary languages.

Language Toggle Button

When alternate button names is enabled, you see the **Language Toggle** next to the Tools button.

Press  (**Language Toggle**) to switch between the primary and secondary languages.

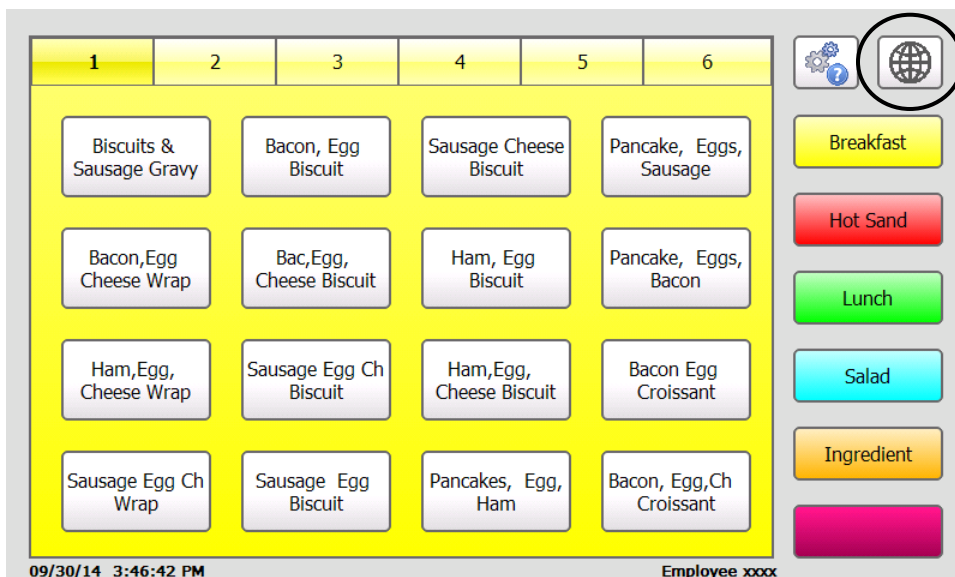


The image shows a printer control panel. At the top, there are six numbered buttons (1-6). Below them is a grid of 16 buttons with various food items. To the right of the grid is a vertical stack of buttons: 'Breakfast' (yellow), 'Hot Sand' (red), 'Lunch' (green), 'Salad' (cyan), 'Ingredient' (orange), and a pink button. At the top right of the panel, there are two icons: a gear with a question mark and a globe icon circled in black. At the bottom left, it says '09/30/14 3:46:42 PM' and at the bottom right, it says 'Employee xxxx'.

Adjusting the Network Settings

Use the Network Settings menu to view the network settings or set an IP Address. The printer's current network settings are displayed.


1. Press  (**Tools**).
2. Press **Admin**.
3. Enter the Admin password and press  (**Enter**). The default password is 1234.
4. Press **System Settings**.
5. Press **Network Settings**. The current network settings appear.

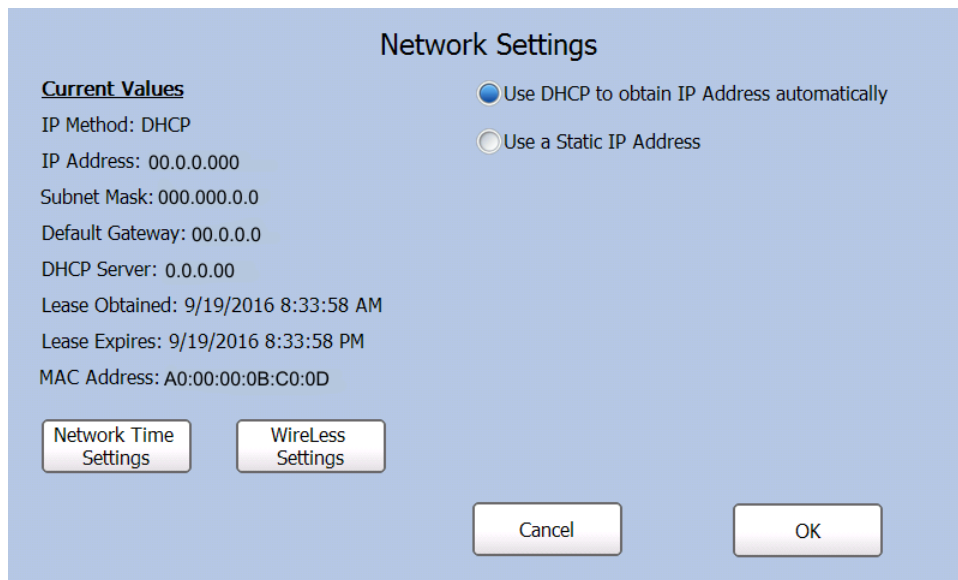

The screenshot shows the 'Network Settings' dialog box. It has a title bar 'Network Settings'. On the left, under 'Current Values', it lists: IP Method: DHCP, IP Address: 00.0.0.000, Subnet Mask: 000.000.0.0, Default Gateway: 00.0.0.0, DHCP Server: 0.0.0.00, Lease Obtained: 9/19/2016 8:33:58 AM, Lease Expires: 9/19/2016 8:33:58 PM, and MAC Address: A0:00:00:0B:C0:0D. On the right, there are two radio buttons: 'Use DHCP to obtain IP Address automatically' (which is selected) and 'Use a Static IP Address'. At the bottom, there are buttons for 'Network Time Settings', 'Wireless Settings', 'Cancel', and 'OK'.

Wireless Settings

Your printer may have optional wireless networking installed. To view the printer's wireless settings press **Wireless Settings**.

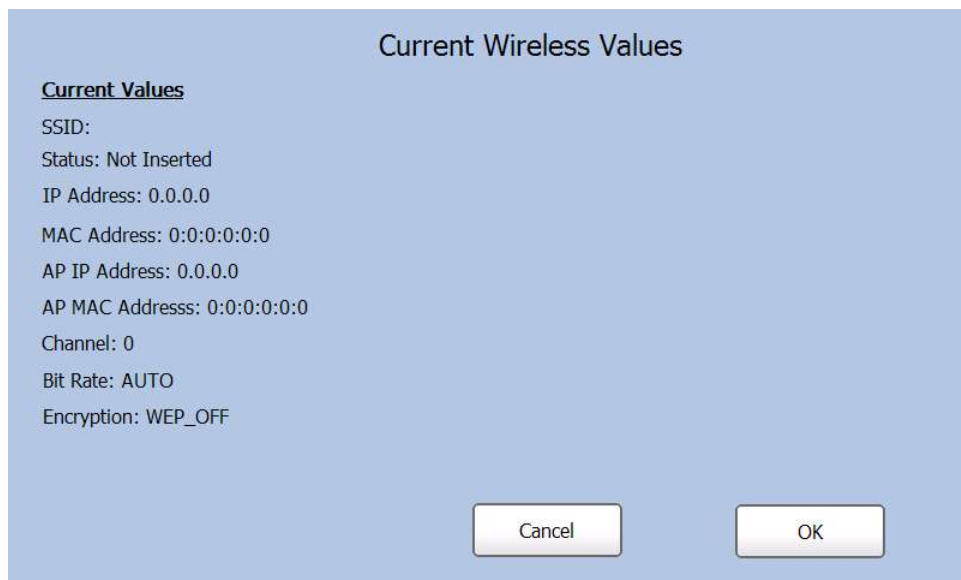


The screenshot shows the 'Current Wireless Values' dialog box. It has a title bar 'Current Wireless Values'. Under 'Current Values', it lists: SSID:, Status: Not Inserted, IP Address: 0.0.0.0, MAC Address: 0:0:0:0:0:0, AP IP Address: 0.0.0.0, AP MAC Address: 0:0:0:0:0:0, Channel: 0, Bit Rate: AUTO, and Encryption: WEP_OFF. At the bottom, there are buttons for 'Cancel' and 'OK'.

To automatically obtain an IP Address:

You can use DHCP to automatically obtain the printer's IP Address.

1. From the *Network Settings* screen, select **Use DHCP to obtain IP Add automatically**.

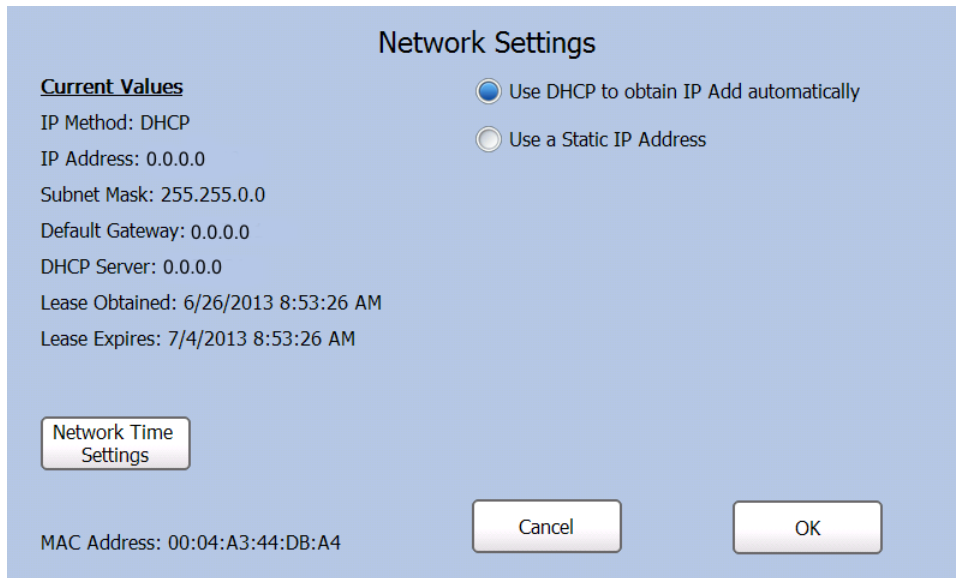


The screenshot shows the 'Network Settings' screen. On the left, under 'Current Values', the following information is displayed: IP Method: DHCP, IP Address: 0.0.0.0, Subnet Mask: 255.255.0.0, Default Gateway: 0.0.0.0, DHCP Server: 0.0.0.0, Lease Obtained: 6/26/2013 8:53:26 AM, and Lease Expires: 7/4/2013 8:53:26 AM. On the right, there are two radio buttons: 'Use DHCP to obtain IP Add automatically' (which is selected) and 'Use a Static IP Address'. At the bottom left, there is a 'Network Time Settings' button. At the bottom right, there are 'Cancel' and 'OK' buttons. The MAC Address 00:04:A3:44:DB:A4 is shown at the bottom left.

2. Press **OK**.


To enter an IP Address:

You can assign the printer a static IP Address.

1. From the *Network Settings* screen, select **Use a Static IP Address**.

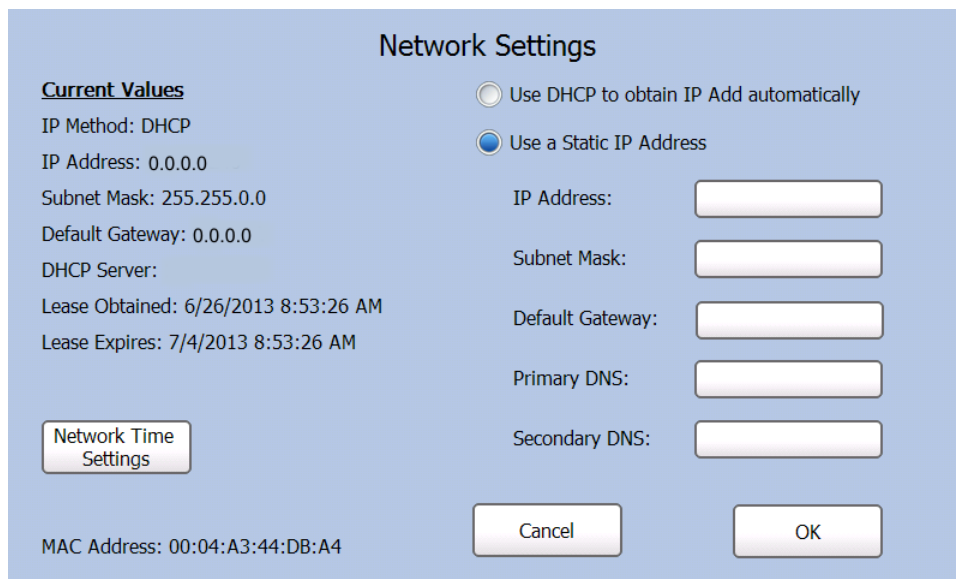


The screenshot shows the 'Network Settings' screen. On the left, under 'Current Values', the following information is displayed: IP Method: DHCP, IP Address: 0.0.0.0, Subnet Mask: 255.255.0.0, Default Gateway: 0.0.0.0, DHCP Server: Lease Obtained: 6/26/2013 8:53:26 AM, and Lease Expires: 7/4/2013 8:53:26 AM. On the right, there are two radio buttons: 'Use DHCP to obtain IP Add automatically' and 'Use a Static IP Address' (which is selected). Below the radio buttons are five text input fields for: IP Address, Subnet Mask, Default Gateway, Primary DNS, and Secondary DNS. At the bottom left, there is a 'Network Time Settings' button. At the bottom right, there are 'Cancel' and 'OK' buttons. The MAC Address 00:04:A3:44:DB:A4 is shown at the bottom left.

2. Touch the text box next to each field to enter the information as needed on the keypad.
3. Press  (**Enter**) on the keypad each time you complete a field.
4. Press **OK** when you are finished.

Selecting your Network Time Server

If your printer is connected to a network with Internet access or to a network time server, use this screen to adjust the settings.

1. From the *Network Settings* screen, press **Network Time Settings**.
2. Select the check box if you want to automatically synchronize your clock with a Network Time Server.

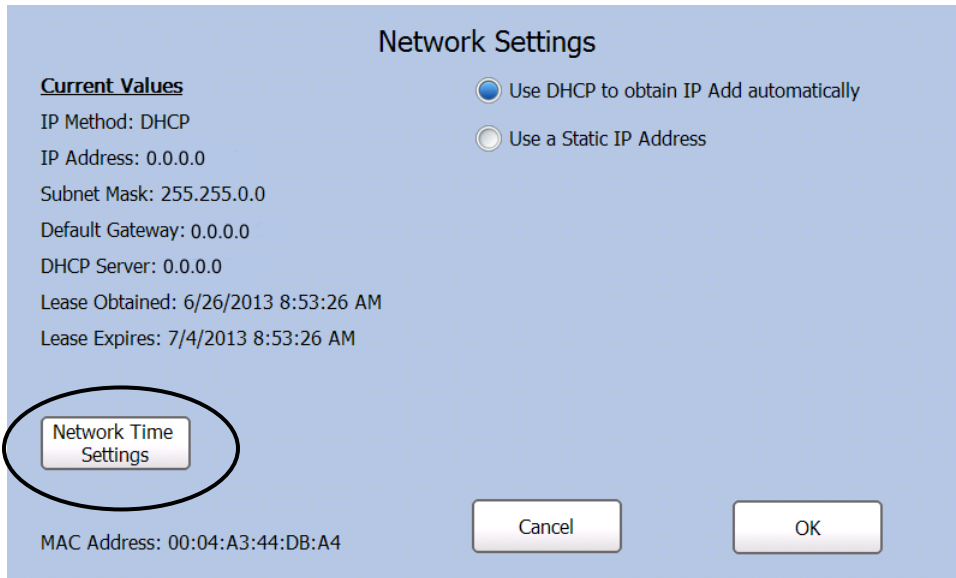

Network Settings


Current Values


IP Method: DHCP
IP Address: 0.0.0.0
Subnet Mask: 255.255.0.0
Default Gateway: 0.0.0.0
DHCP Server: 0.0.0.0
Lease Obtained: 6/26/2013 8:53:26 AM
Lease Expires: 7/4/2013 8:53:26 AM

Use DHCP to obtain IP Add automatically
 Use a Static IP Address

MAC Address: 00:04:A3:44:DB:A4

Buttons: Network Time Settings, Cancel, OK

3. To add a new Network Time Server press **Add**. Use the keypad to enter the server address. press  (**Enter**) on the keypad each time you complete a field.

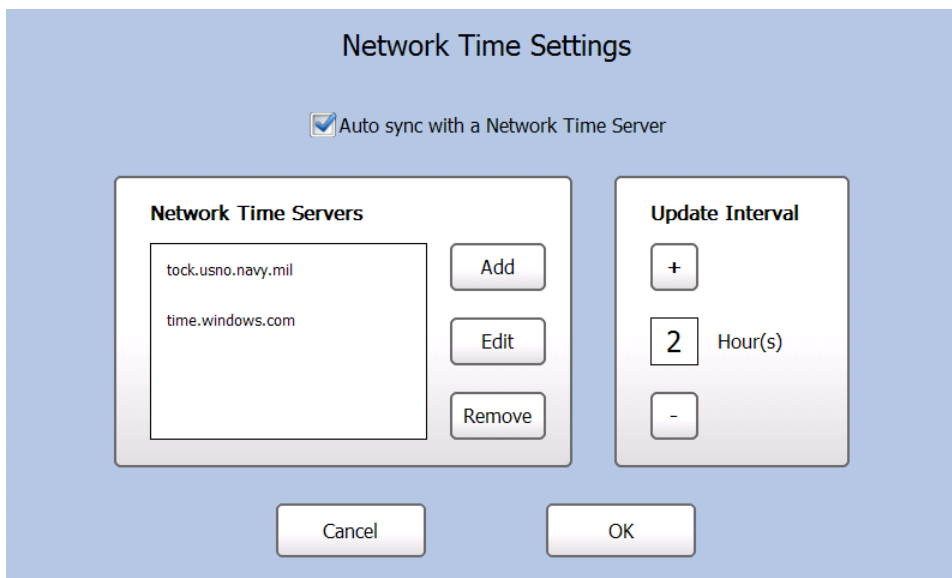

Network Time Settings

Auto sync with a Network Time Server

Network Time Servers

tock.usno.navy.mil
time.windows.com

Buttons: Add, Edit, Remove

Update Interval

+
2 Hour(s)
-

Buttons: Cancel, OK

To edit an existing Network Time Server, select the server name from the box then press **Edit**. Use the keypad to change the server address as needed.

To remove an existing Network Time server, select the server name from the box then press **Remove**.

4. Adjust the frequency at which your clock synchronizes with the Network Time Server. Use the + and – buttons to adjust the setting up or down.
5. Press **OK** when you are finished.


EDITING PRODUCT DATA

Entering Edit Mode

You can make changes to the product buttons; on the printer through Admin Tools or on your PC using EasyEdit+ (refer to the *EasyEdit+ System Administrator's Guide* on our Web site).


Note: Some fields that print on the label can only be edited using EasyEdit+.

1. Press the **Tools**  button.
2. Press **Admin**.
3. Enter the Admin password then press  (**Enter**). The default password is **1234**.

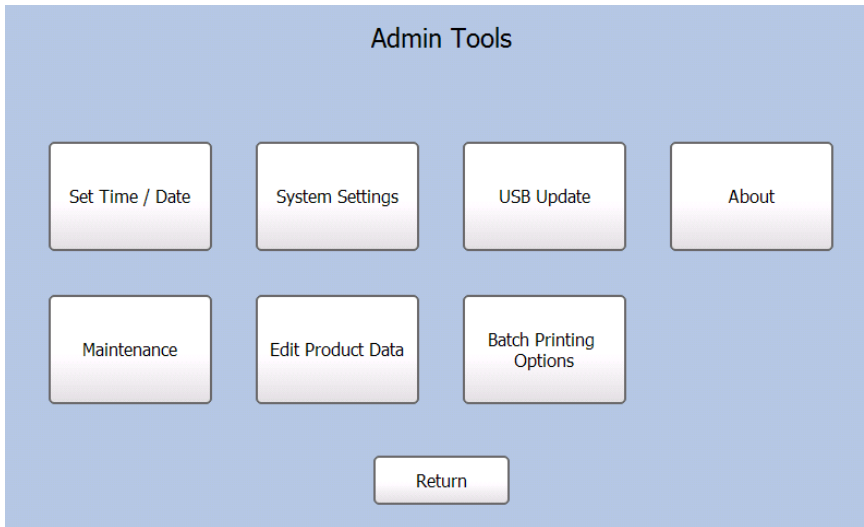

4. Press **Edit Product Data**.

You return to the product screen. The background color of the screen changes and “Edit Product Data” appears at the bottom right of the screen. After five minutes of inactivity, you must repeat steps 1 – 4. The countdown is shown at the bottom right of the screen.

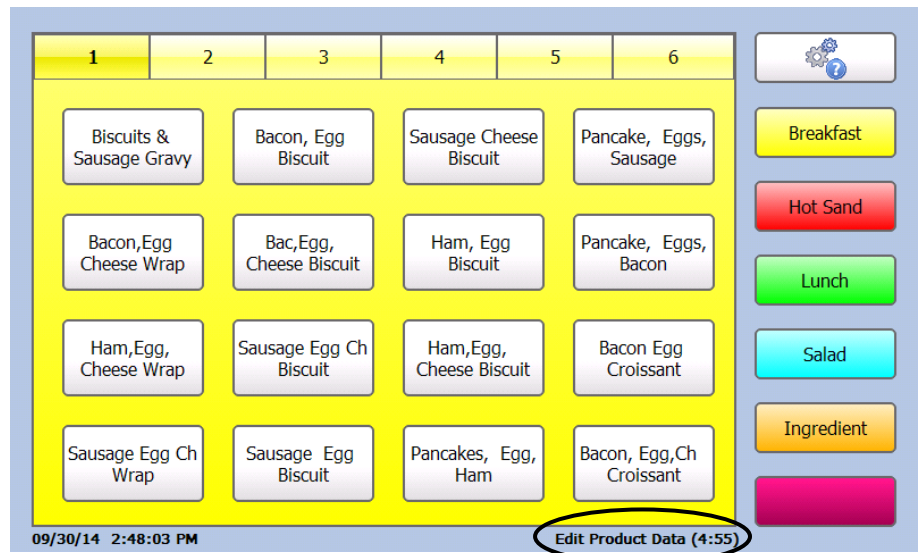


Adding and Removing Products

You must be in Edit Mode to add or remove product buttons.

To add a product button:

1. Press any empty product button.

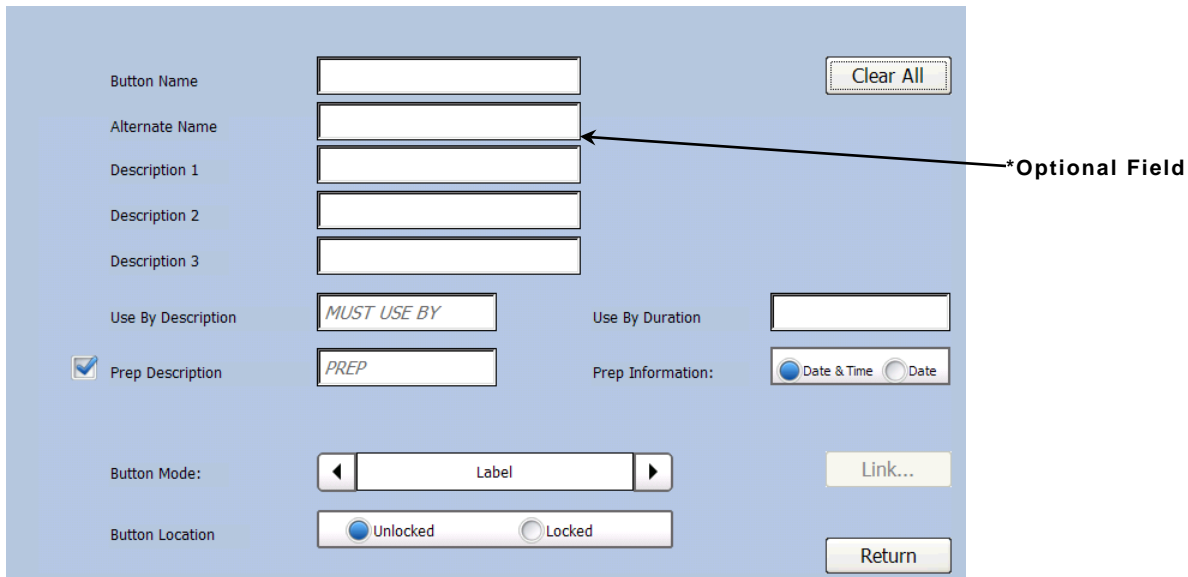


The screenshot shows a configuration form for a product button. The form includes the following fields and controls:

- Button Name: Text input field.
- Alternate Name: Text input field, with an arrow pointing to it from the text "*Optional Field".
- Description 1, 2, 3: Three stacked text input fields.
- Use By Description: Text input field containing "MUST USE BY".
- Use By Duration: Text input field.
- Prep Description: Text input field containing "PREP", with a checked checkbox to its left.
- Prep Information: Radio buttons for "Date & Time" (selected) and "Date".
- Button Mode: A dropdown menu showing "Label".
- Button Location: Radio buttons for "Unlocked" (selected) and "Locked".
- Buttons: "Clear All", "Link...", and "Return".

*The Alternate Name field is shown if you enable Alternate Button Names (see "[Adjusting the Language Settings](#)" for more information). Enter the button's alternate name as you want it to appear when the operator presses the Language Toggle Button.


2. Select the Button Mode. The Button Mode field sets the button function. See "[About Button Modes](#)" for more information.

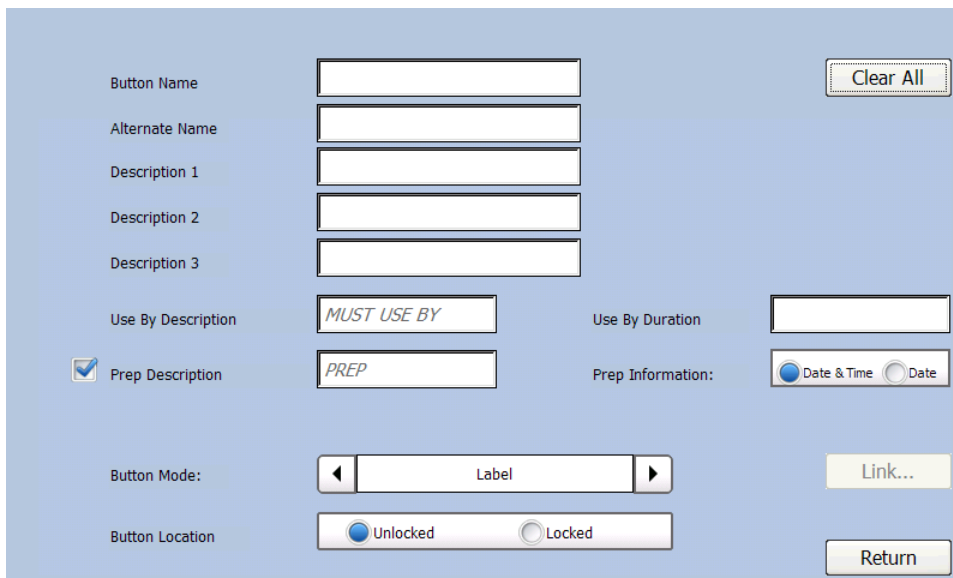


This is a duplicate of the screenshot above, showing the same product button configuration form.


Note: You must click the link button to link a file to the button if you select Video, Document, Label & Video, or Label & Document button mode.


3. Enter the button name. Touch the text box next to each field to open the keypad. Press and hold a key to use symbols and accented characters.

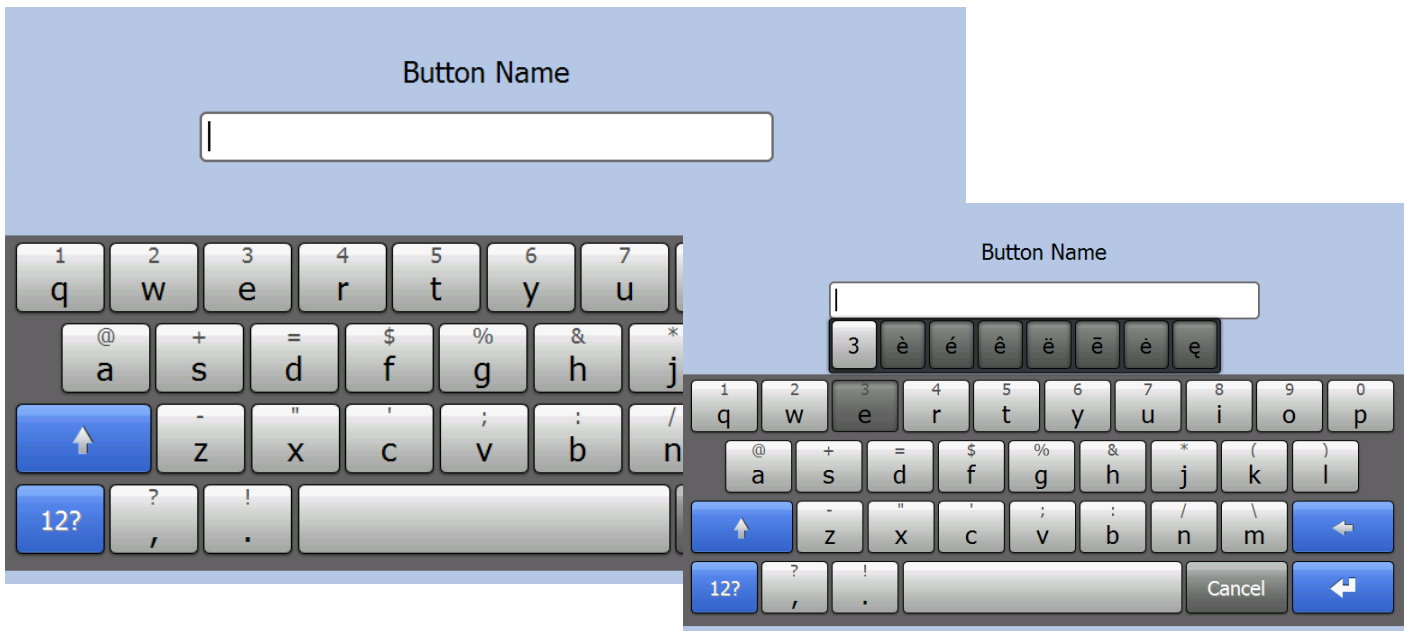

4. Press  (**Enter**) on the keypad each time you complete a field.
5. To modify the Must Use By description, touch the text box next to the Use By Description field to open the keypad. The default "MUST USE BY" appears.




Note: To return to the default value, press  to clear the field then click **Save**. Default values are shown in italicized, gray text. User modified values are shown in non-italicized, black text.

Press  to clear the field and enter the new data, for example, **BEST BEFORE**.

Press  (**Enter**).

When this item is printed, the new Use By description prints. For example:



**New Use By Description:
BEST BEFORE**

6. Touch the text box next to the Use By Duration field.
Use ◀ and ▶ to set the product's expiration time in Days, Hours, and Minutes.

Use By Duration

Use "End of Day" expiration mode

Days

◀ 0 ▶

Hours

◀ 00 ▶

Minutes

◀ 00 ▶

Cancel

OK

Select Use "End of Day" expiration mode to only print the date on the label. The hours and minutes fields are disabled.

Select Print "End of Day" on label to print "End of Day" and the date on the label.

Use By Duration

Use "End of Day" expiration mode Print "End of Day" on label

Days

◀ 0 ▶

Hours

◀ 0 ▶

Minutes

◀ 0 ▶


Cancel

OK

7. Press **OK**.
8. Enter any other information as necessary.
9. Press **Save**. The new product appears on the selected button.

To remove a product button:

1. Press the product button you want to remove.
2. Press **Clear All**. All existing product information is removed from the screen.

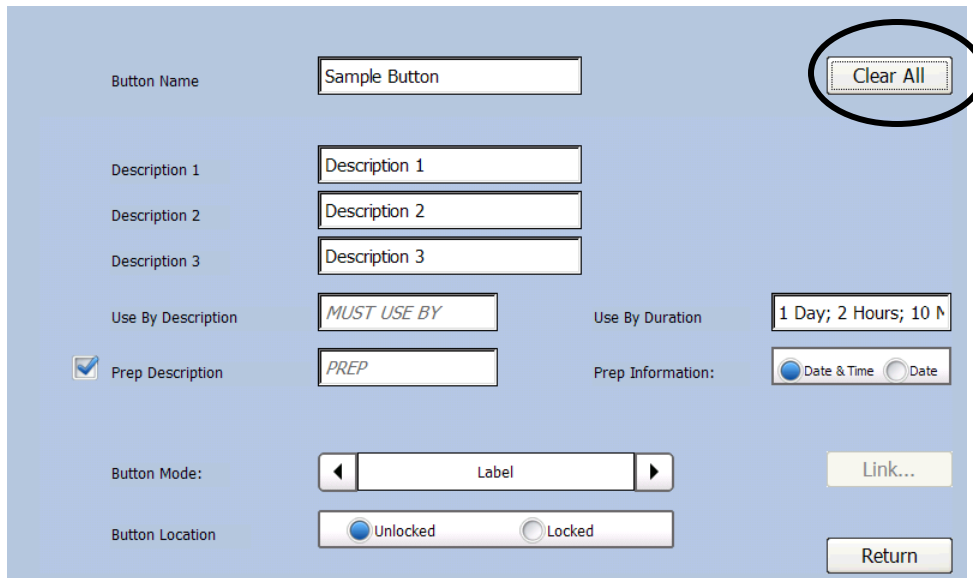

The screenshot shows a product editing interface with the following fields and controls:


- Button Name: Sample Button
- Description 1: Description 1
- Description 2: Description 2
- Description 3: Description 3
- Use By Description: MUST USE BY
- Use By Duration: 1 Day; 2 Hours; 10 M
- Prep Description: PREP
- Prep Information: Date & Time Date
- Button Mode: Label
- Button Location: Unlocked Locked
- Buttons: Link... and Return
- A "Clear All" button is circled in the top right corner.

3. Press **Save**.

You return to the product screen; the selected button is blank.

Editing Product Descriptions


You must be in Edit Mode to change button information.

1. Press the product button to edit.
2. Edit the product information fields as needed. Touch the text box next to each field to open the keypad.
3. Press  (**Enter**) each time you complete a field.
4. Press **Save**.


Editing the Use First Button


You must be in Edit Mode to change the Use First button.

1. Press  (**Tools**).

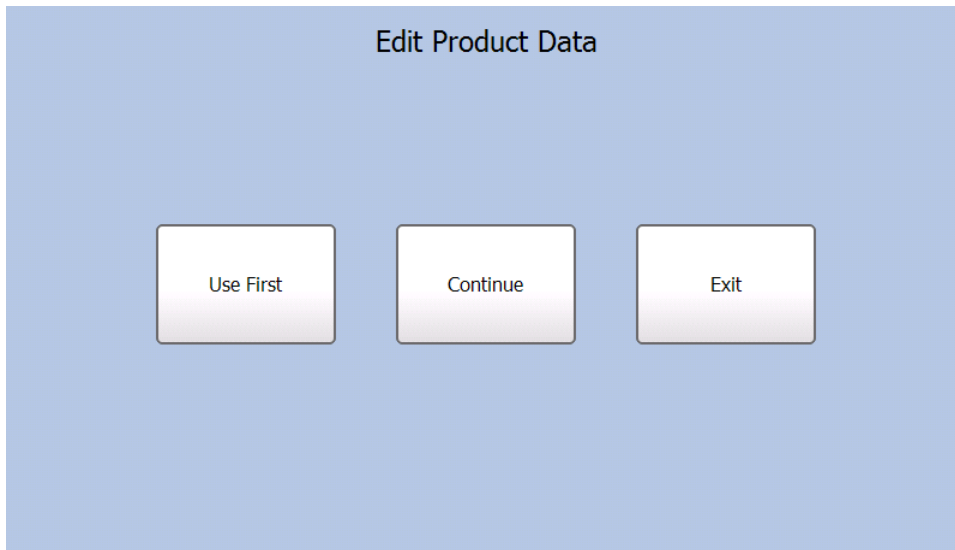

2. Press **Use First**.

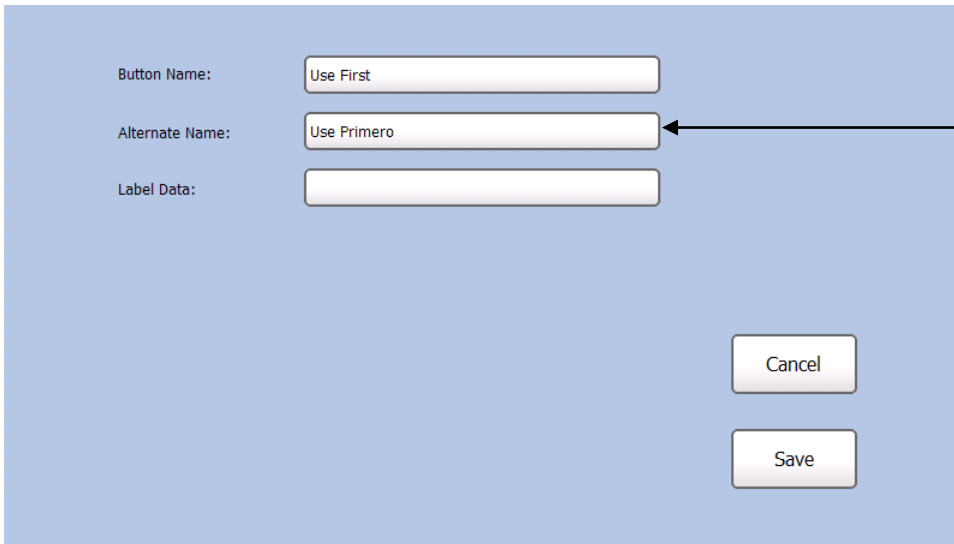A screenshot of a software interface showing the configuration form for the "Use First" button. The form has three input fields: "Button Name" with the value "Use First", "Alternate Name" with the value "Use Primero", and "Label Data" which is empty. An arrow points from the text "*Optional Field" to the "Alternate Name" field. At the bottom right of the form are two buttons: "Cancel" and "Save".


*The Alternate Name field is shown if you enable Alternate Button Names (see "Adjusting the Language Settings" in Chapter 3 for more information). Enter the button's alternate name as you want it to appear when the operator presses the Language Toggle Button  .

3. Enter the Button Name.
4. Enter the Label Data. This field is printed on labels when the Use First button is pressed. If this field is left blank, the default text "Use First" prints on labels.

Note: This field has a maximum of four words.


5. Click **Save** to save the changes or **Cancel** to exit.

Note: The "Use First" Button Name, "Use First" Alternate Name, and Label Data fields have default values. You can press the ⊗ to clear the field then click Save to use the default values.




Editing Category Buttons


You can change the names of the category buttons. You can also select which format and printer (left or right) prints for each category. You must be in Edit Mode to edit categories.

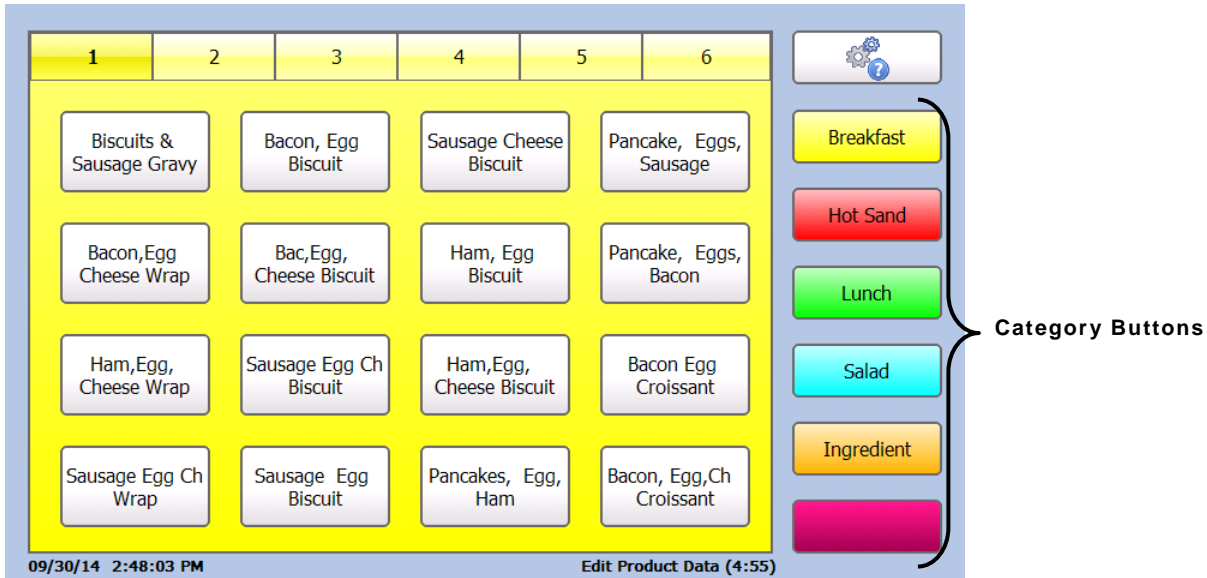


Note: Settings apply to all product buttons within the selected category.


1. Select the category button you want to edit. You may have to press the category button up to three times to open the editing screen.

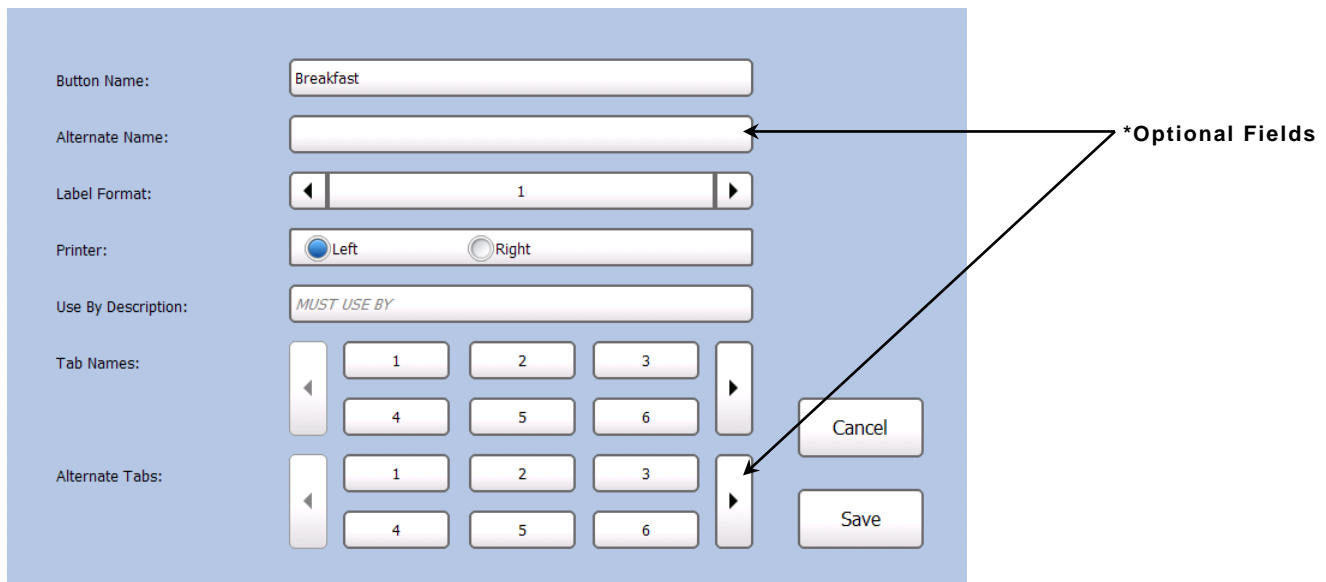


*The Alternate Name and Alternate Tab fields are shown if you enable Alternate Button Names (see "[Adjusting the Language Settings](#)" for more information). Enter the button's alternate name as you want it to appear when the operator presses  (**Language Toggle**).

2. Touch the text box next to the Button Name field to open the keypad. Enter the Button Name and then Press  (**Enter**).
3. Select the Label Format for all products in this category. Use ◀ and ▶ to scroll through the list of formats. See Appendix A, "[Label Formats](#)" for more information.

Note: If you select a format larger than the loaded labels, some information may not print.

4. Select the Left or Right printer to print the product labels for this category. This option does not appear for single printer models.
5. Touch the text box next to the Use By Description field. Enter the Use By Description then Press  (Enter).




Note: The Use by Description field has a default value (“MUST USE BY”). You can press  to clear the field. Default values are shown in italicized, gray text. User modified values are shown in non-italicized, black text.



6. Press **Save**.

Assigning a Label Format

You can select the label format for the category buttons. All products within a category use the same label format. You must be in Edit Mode to assign a label format to a category.

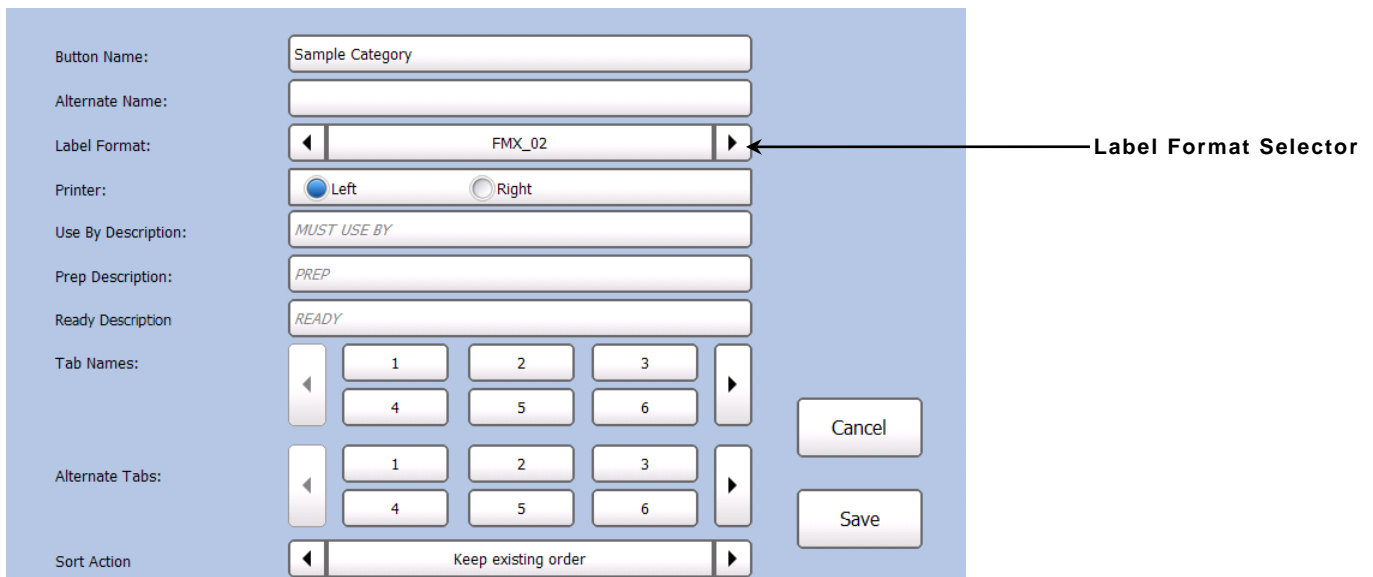1. While in Edit Mode, select the category button to which you want to assign a format. If that category is not active, press the category button again.




2. Select the Label Format for all products in this category. Use  and  to scroll through the list of formats. See Appendix A, “[Label Formats](#)” for more information.

Note: If you select a format larger than the loaded labels, some information may not print.

3. Press **Save**

Editing Tab Names

You can change the names of the product button tabs. You must be in Edit Mode to edit product button tabs.

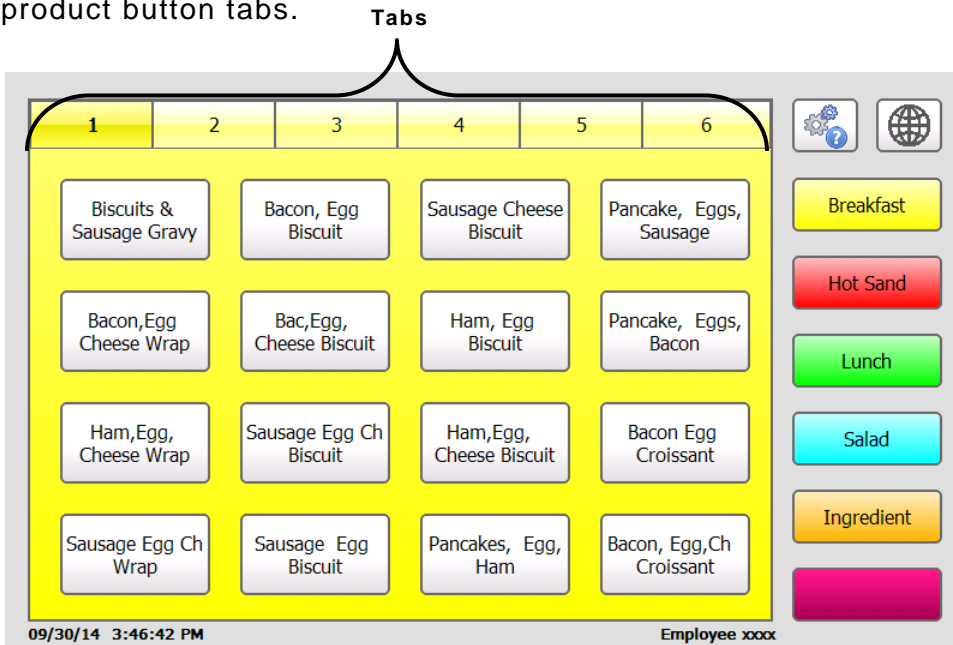


1. Select the category button for the tabs you want to edit. You may have to press the category button up to three times to open the editing screen.
2. Touch one of the Tab Name buttons. The keypad opens.

The screenshot shows the editing screen for a product button. It has the following fields and controls:

- Button Name:
- Alternate Name:
- Label Format:
- Printer: Left Right
- Use By Description:
- Tab Names: A keypad with buttons 1, 2, 3, 4, 5, 6.
- Alternate Tabs: A keypad with buttons 1, 2, 3, 4, 5, 6.
- Cancel button
- Save button


An arrow points from the text "*Optional Fields" to the "Alternate Tabs" keypad.

3. Enter the Tab Name you want then Press  (Enter).
4. Press **Save**.

Adding Timers


You must be in Edit Mode to create timers.


1. Press any empty product button.
2. Select **Timer** as the Button Mode.

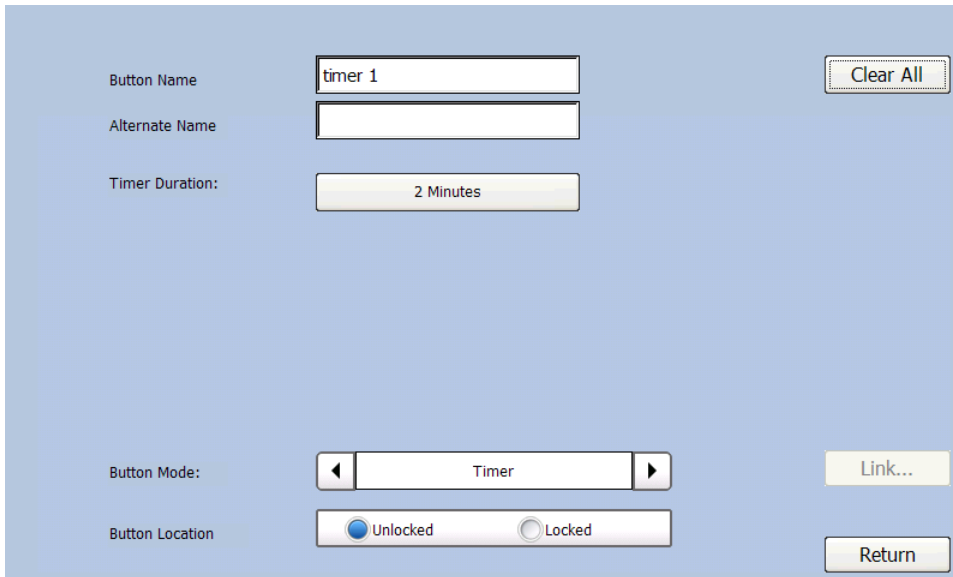

The screenshot shows a configuration form for a timer. It includes the following fields and controls:

- Button Name:** A text input field containing "timer 1".
- Alternate Name:** An empty text input field.
- Timer Duration:** A dropdown menu set to "2 Minutes".
- Button Mode:** A dropdown menu set to "Timer".
- Button Location:** Radio buttons for "Unlocked" (selected) and "Locked".
- Buttons:** "Clear All", "Link...", and "Return".

3. Enter the Button Name. Touch the text box next to each field to open the keypad. Press and hold a key to use symbols and accented characters. Press  (**Enter**).

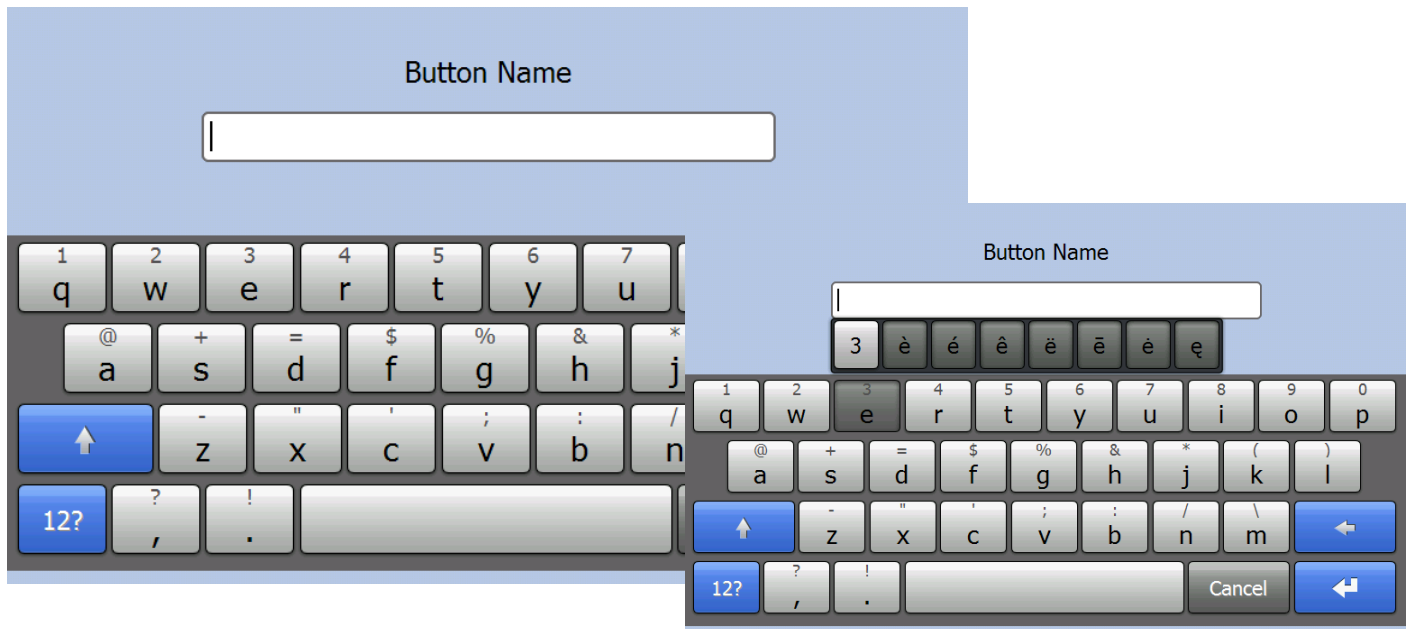

4. Touch the text box next to the Time Duration field.

Button Name: timer 1

Alternate Name:

Timer Duration: 2 Minutes

Button Mode: Timer

Button Location: Unlocked

Clear All

Link...

Return

5. Use ◀ and ▶ to set the timer's expiration time in Hours, Minutes, and Seconds.

Timer Duration

Hours: 0

Minutes: 30

Seconds: 00

Cancel


OK

6. Press **OK**.
7. Press **Save**. The new timer button appears.

Exiting Edit Mode

To exit Edit Mode:


1. Press  (**Tools**).

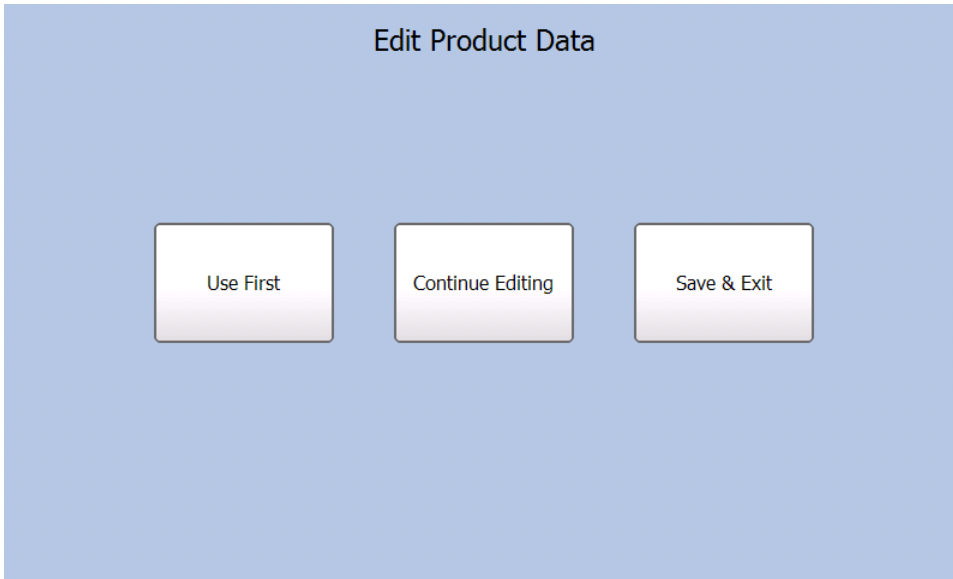


2. Press **Save & Exit** to save all changes and return to the Product screen.
Or, press **Continue Editing** to remain in Edit Mode and make additional changes.


Creating a Batch


1. Press the **Tools**  button.
2. Press **Admin**.
3. Enter the Admin password then Press  (**Enter**). The default password is **1234**.
4. Press **Batch Printing Options**.

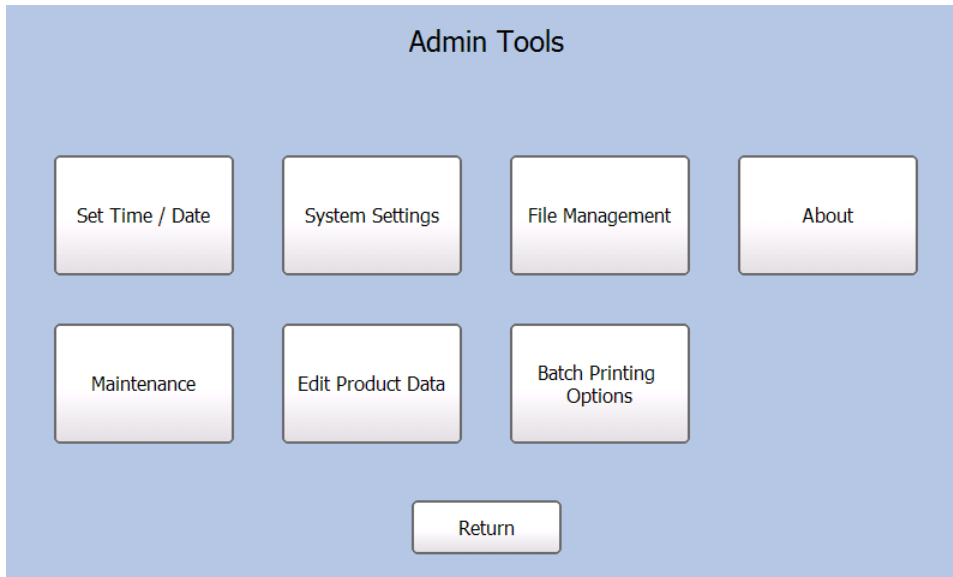


5. Press **Create Batch**.

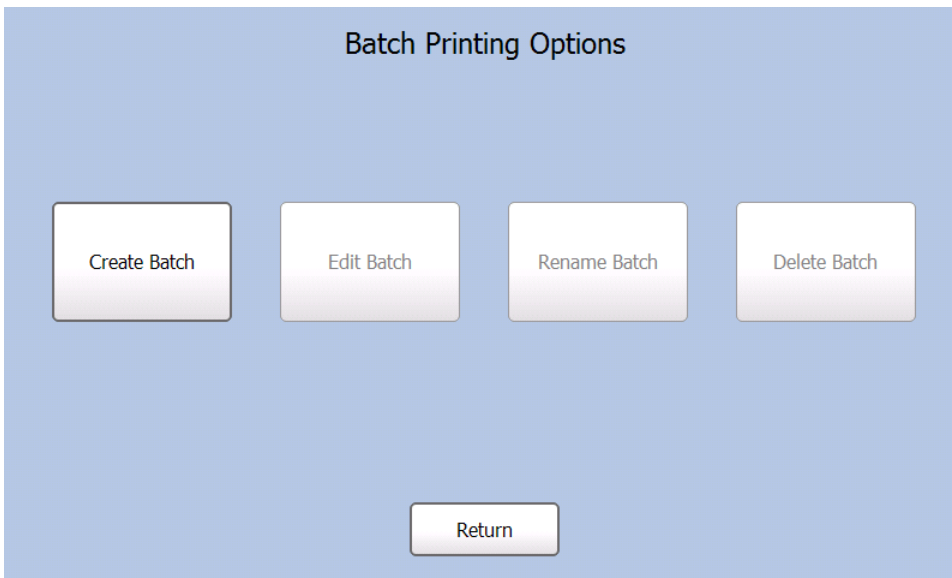


6. Fill in the New Batch Name field. press  (**Enter**).

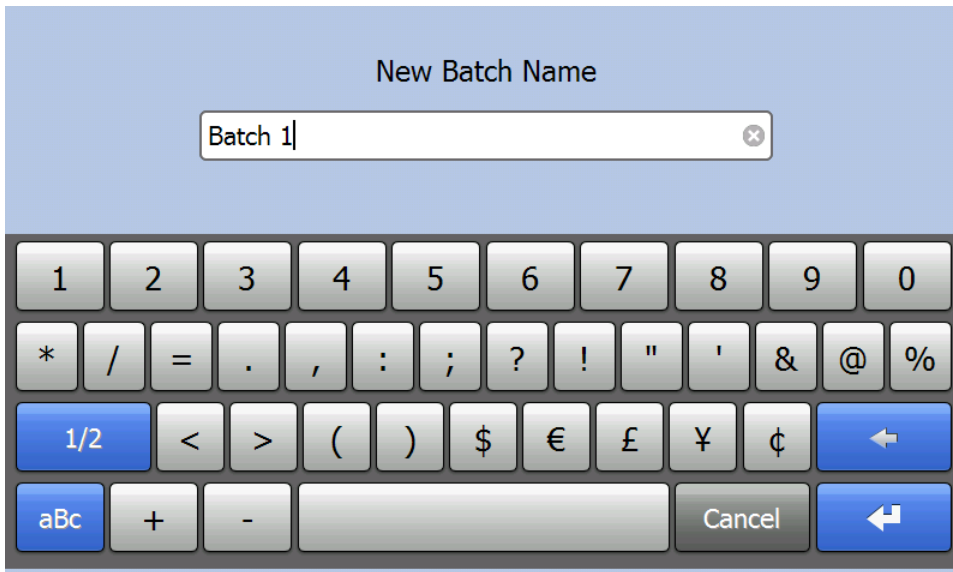


Note: You cannot have more than one batch with the same name. Press  (**Enter**).


7. Press **Add Item** to add an item to the batch.

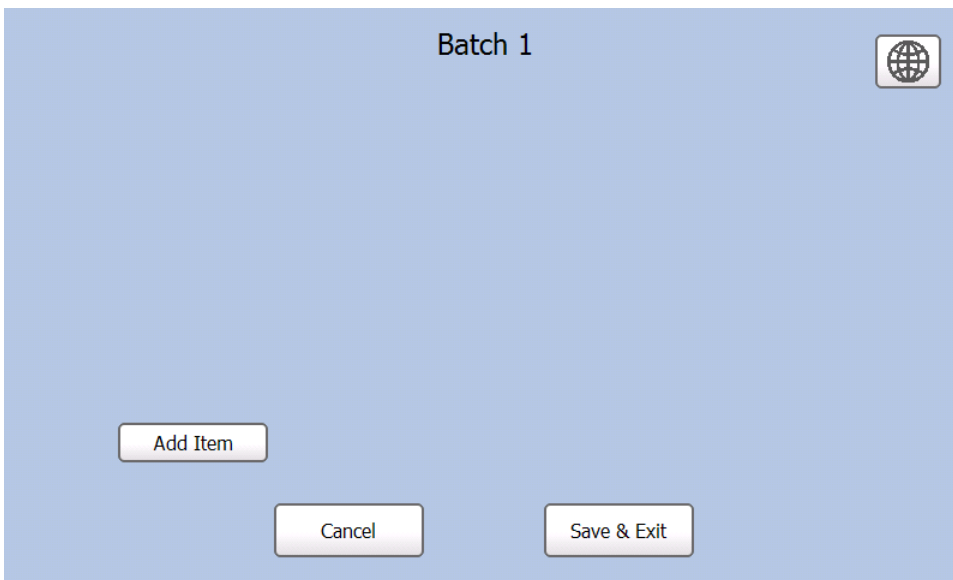

8. Click on the item's Product Button to add it to the batch.

9. Select the number of labels to print for that batch item then Press  (**Enter**).

10. Repeat steps 8 -9 to continue adding items to the batch.

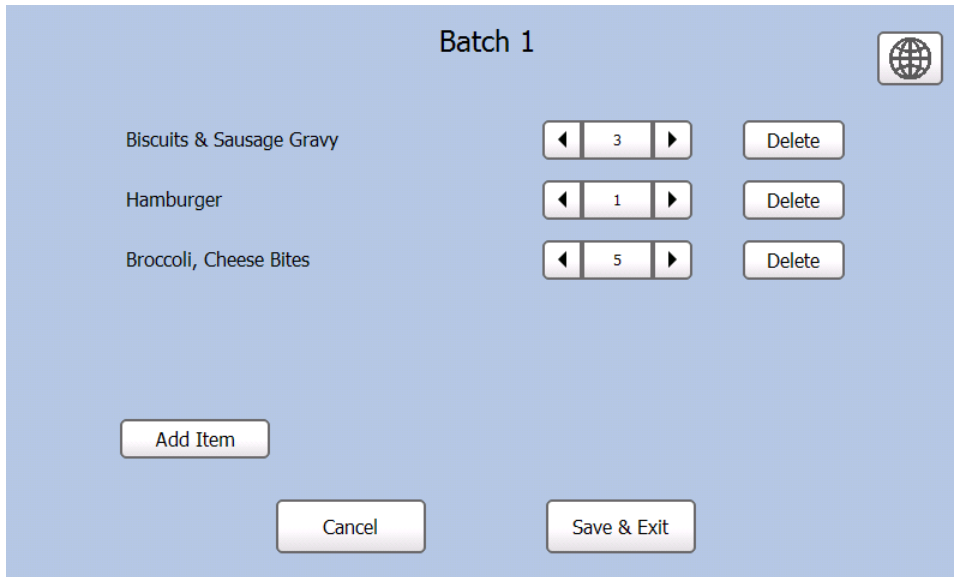

The screenshot shows a window titled "Batch 1" with a globe icon in the top right corner. It lists three items with their respective counts and "Delete" buttons:

Item	Count	Action
Biscuits & Sausage Gravy	3	Delete
Hamburger	1	Delete
Broccoli, Cheese Bites	5	Delete


At the bottom, there are three buttons: "Add Item", "Cancel", and "Save & Exit".

11. When you are finished adding items to the batch press **Save & Exit**.

Note: Cancel deletes the batch.

Editing a Batch


1. Press the **Tools**  button.
2. Press **Admin**.
3. Enter the Admin password then Press  (**Enter**). The default password is **1234**.
4. Press **Batch Printing Options**.

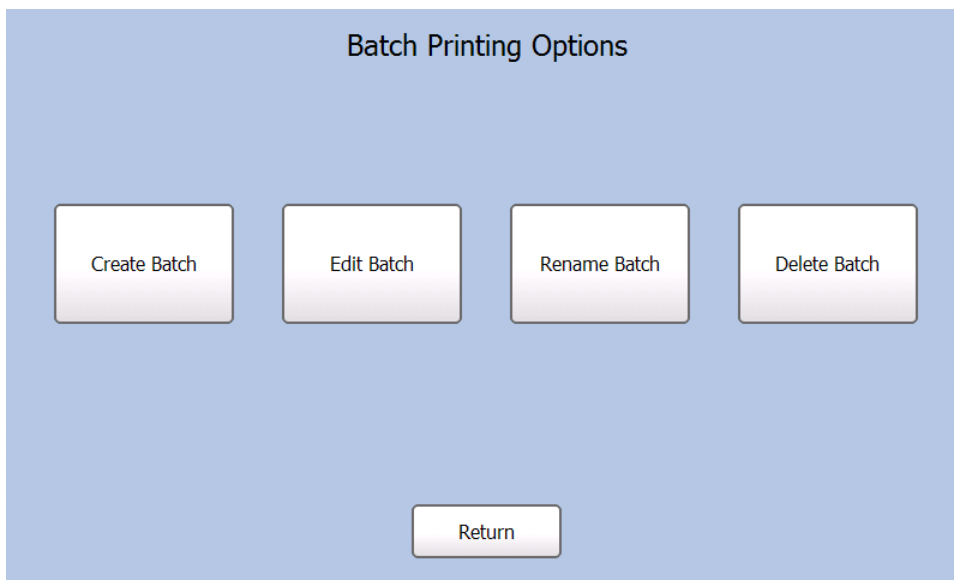

The screenshot shows a window titled "Batch Printing Options" with four buttons in a row: "Create Batch", "Edit Batch", "Rename Batch", and "Delete Batch". A "Return" button is located at the bottom center.

5. Press **Edit Batch**.
6. Select the batch you want to edit.

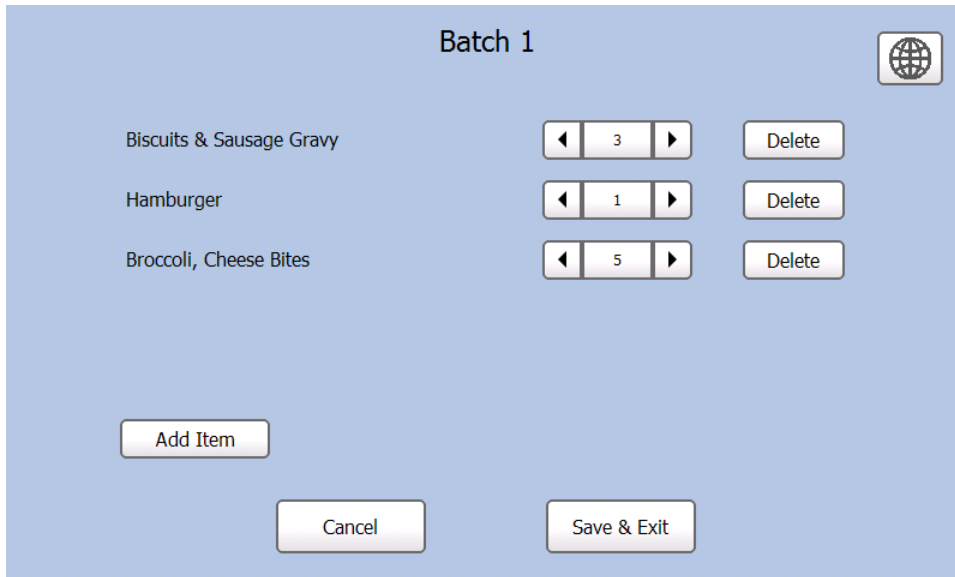

7. Press **Add Item** to add more items to the batch.
Use **◀** and **▶** next to an item quantity to change the number of labels that print for that item.
Press **Delete** to remove that item from the batch.



8. Press **Save & Exit**.



Note: Cancel deletes the changes.

Renaming a Batch

1. Press the **Tools**  button.
2. Press **Admin**.
3. Enter the Admin password then Press  (**Enter**). The default password is **1234**.
4. Press **Batch Printing Options**.
5. Press **Rename Batch**.
6. Select the batch you want to rename.
7. Enter the new batch name then Press  (**Enter**).

Note: You cannot have more than one batch with the same name.

Deleting a Batch


1. Press the **Tools**  button.
2. Press **Admin**.
3. Enter the Admin password then Press  (**Enter**). The default password is **1234**.
4. Press **Batch Printing Options**.
5. Press **Delete Batch**.
6. Select the batch you want to delete.
7. Select **Yes** to delete the batch.

UPDATING THE PRINTER


Updating Your Product Data File via USB

You can use a USB Flash Drive to transfer your updated product data file from your PC to your printer. Save your data file in the root directory on a USB Flash Drive.


1. Plug the USB Flash Drive into the USB port on the side of the printer.

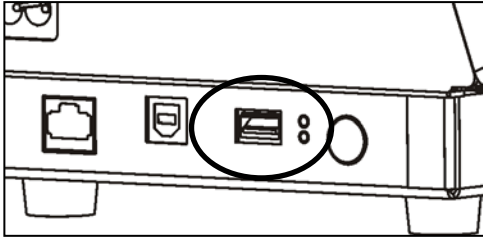

2. Press the **Tools**  button.
3. Press **Admin**.
4. Enter the Admin password then press  (**Enter**). The default password is **1234**.

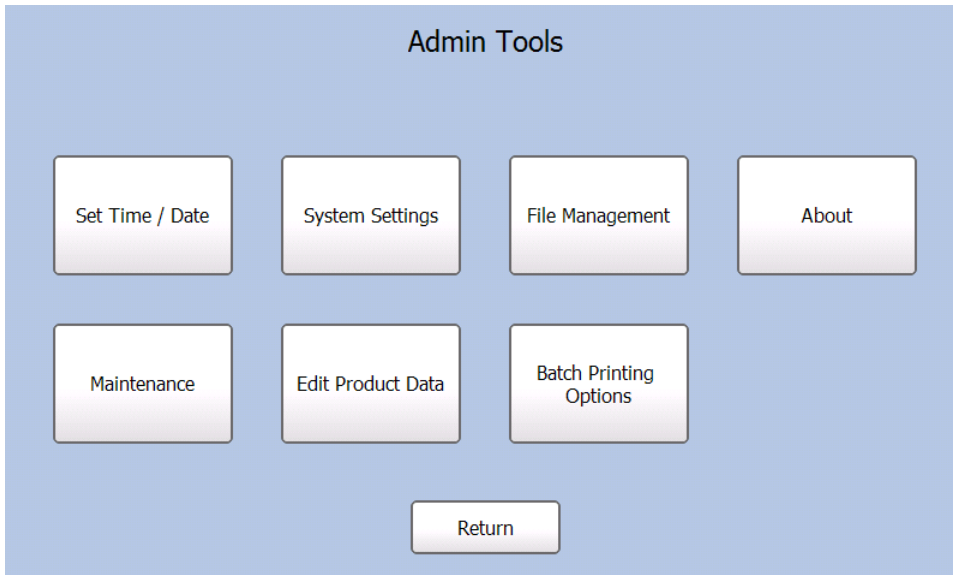

5. Press **File Management**.

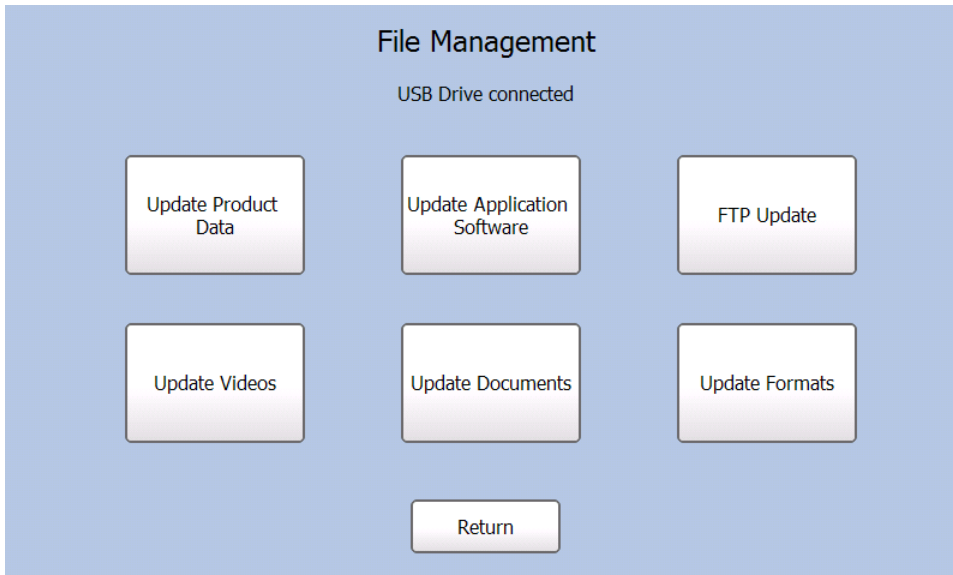

6. Press **Update Product Data** to update the data files.

If you have more than one Product Data file stored on your USB Flash Drive, select the file you want to install then press **Copy to Printer**.

7. You see a progress bar while the file is loaded. Once the process is complete, you see the home screen.

8. Remove the USB Flash Drive.

Updating Your Application Software via USB


You can use a USB Flash Drive to transfer updated Application Software from your PC to your printer. Save the latest application in the root directory of a USB Flash Drive.

1. Plug the USB Flash Drive into the USB port on the side of the printer.


2. Press the **Tools**  button.

3. Press **Admin**.

4. Enter the Admin password then press  (**Enter**). The default password is **1234**.

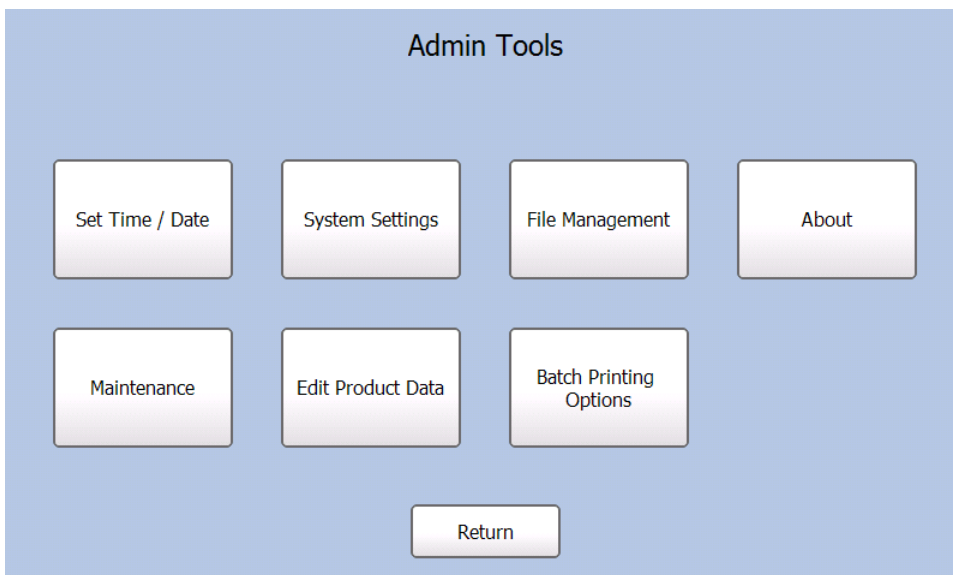

5. Press **File Management**.

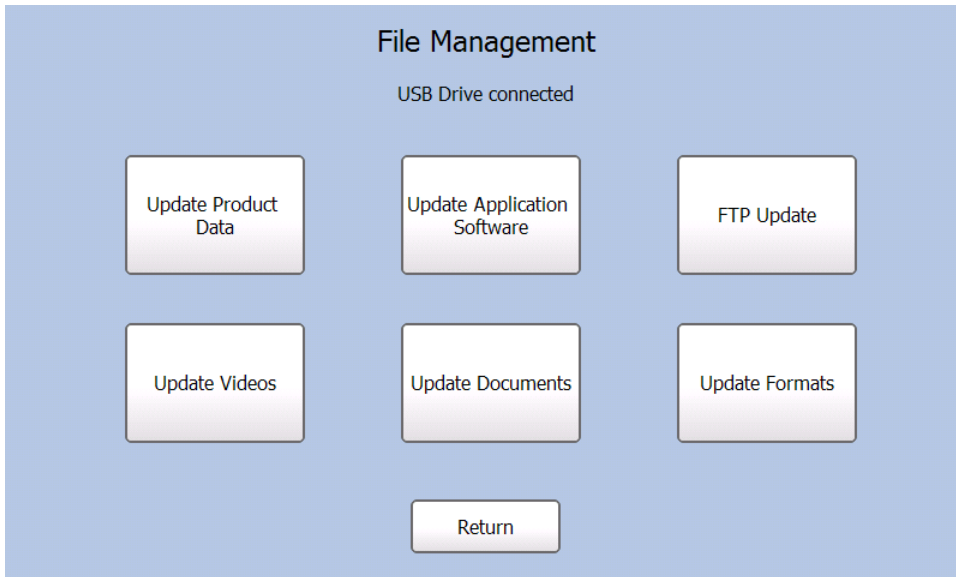

6. Press **Update Application Software**.

If you have more than one Application Software file stored on your USB Flash Drive, select the file you want to install then press **OK**.

This may take several minutes. When the update is complete, the printer restarts.

7. Remove the USB Flash Drive.

Updating the Printer via FTP

You can use FTP to update your printer's Product Data File and Application Software. The 9417+ printer uses industry standard TCP/IP protocols.


Your host computer must have FTP client software installed.

The default username for the 9417+ printer is "ad9415". The default password is "monarch".


1. Press  (**Tools**).

2. Press **Admin**.

3. Enter the Admin password then press  (**Enter**). The default password is **1234**.

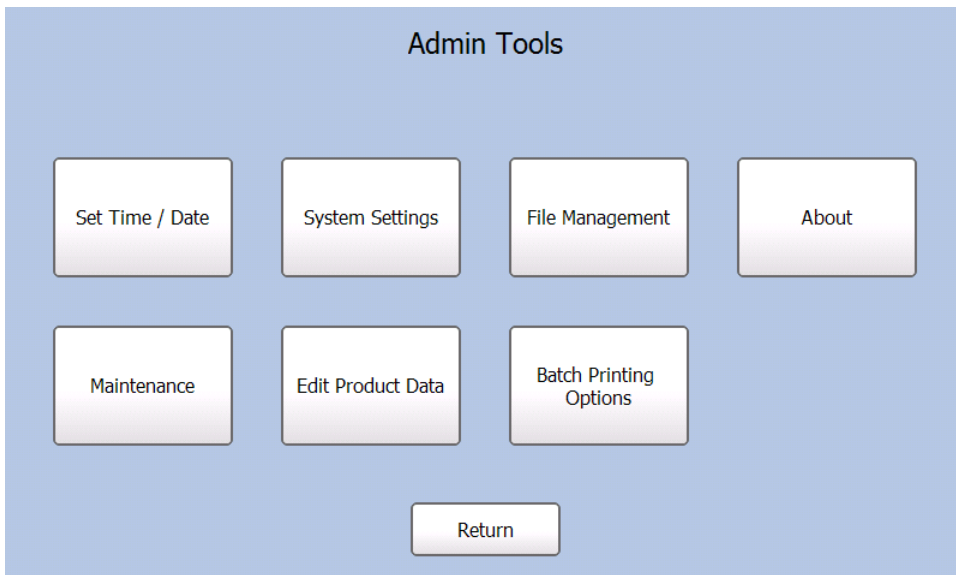

4. Press **File Management**.

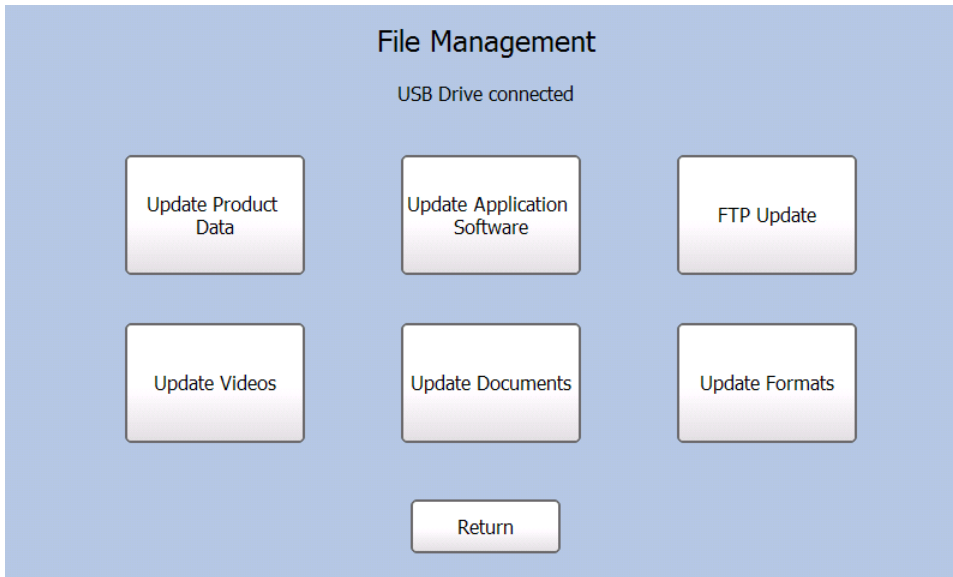


5. Press **FTP Update**.

6. Enter the information as necessary.

Automatically Check for Updates

Select "Automatically check for updates" for your printer to query the FTP server for updates at the specified time and frequency.

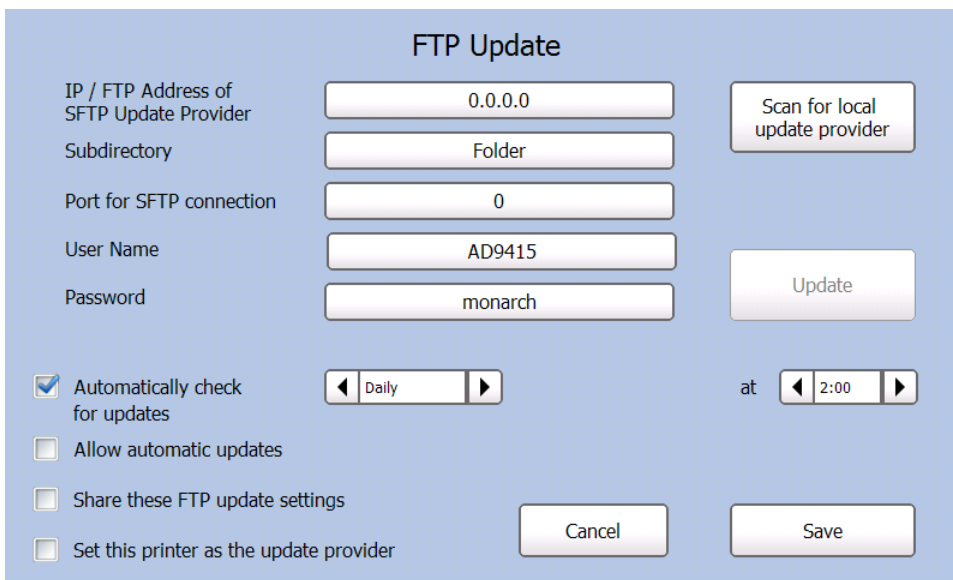

Use the ◀ and ▶ next to adjust the settings. You can set the printer to check for updates:

- ◆ On every start-up
- ◆ Daily at a specific time
- ◆ Weekly on a set day at a set time
- ◆ Monthly on a set day at a set time

Allow Automatic Updates

Select “Allow automatic updates” to enable your printer to accept an unscheduled update sent from the FTP server.

FTP Update

IP / FTP Address of SFTP Update Provider	<input type="text" value="0.0.0.0"/>	<input type="button" value="Scan for local update provider"/>
Subdirectory	<input type="text" value="Folder"/>	
Port for SFTP connection	<input type="text" value="0"/>	<input type="button" value="Update"/>
User Name	<input type="text" value="AD9415"/>	
Password	<input type="text" value="monarch"/>	
<input checked="" type="checkbox"/> Automatically check for updates	<input type="text" value="Daily"/>	at <input type="text" value="2:00"/>
<input checked="" type="checkbox"/> Allow automatic updates		
<input type="checkbox"/> Share these FTP update settings		
<input type="checkbox"/> Set this printer as the update provider	<input type="button" value="Cancel"/>	<input type="button" value="Save"/>

Share FTP Update Settings

Select “Share these FTP update settings” to make the printer’s settings available to other printers on the network.

FTP Update

IP / FTP Address of SFTP Update Provider	<input type="text" value="0.0.0.0"/>	<input type="button" value="Scan for local update provider"/>
Subdirectory	<input type="text" value="Folder"/>	
Port for SFTP connection	<input type="text" value="0"/>	<input type="button" value="Update"/>
User Name	<input type="text" value="AD9415"/>	
Password	<input type="text" value="monarch"/>	
<input checked="" type="checkbox"/> Automatically check for updates	<input type="text" value="Daily"/>	at <input type="text" value="2:00"/>
<input checked="" type="checkbox"/> Allow automatic updates		
<input checked="" type="checkbox"/> Share these FTP update settings		
<input type="checkbox"/> Set this printer as the update provider	<input type="button" value="Cancel"/>	<input type="button" value="Save"/>

Set Printer as Update Provider

Select “Set this printer as the update provider” to use the printers FTP update settings as the master for other printers on the network.

FTP Update

IP / FTP Address of SFTP Update Provider: 0.0.0.0

Subdirectory: Folder

Port for SFTP connection: 0

User Name: AD9415

Password: monarch

Automatically check for updates: Daily

Allow automatic updates:

Share these FTP update settings:

Set this printer as the update provider:

at: 2:00

Buttons: Scan for local update provider, Update, Cancel, Save

Updating Videos

You can use a USB Flash Drive to transfer videos from your PC to your printer. Save the videos in the root directory of a USB Flash Drive.

Video Specifications

Supported media files:

- ◆ Video (AVI, DIVX, GVI)
- ◆ MPEG Movie (MPEG, MPG, MPV)
- ◆ MPEG4 (MP4, MOV, 3GP, M4A, M4B, K3G, MQV)
- ◆ Matroska (MKV, MKA)

Supported video codecs:

- ◆ Xvid
- ◆ MPEG-4
- ◆ MPEG-1


Recommended resolution: 800 x 480

Note: Videos must be converted before they are viewable on the 9417+ printer.


Transferring Videos to/from the Printer

To update video files on the printer:


1. Plug the USB Flash Drive into the USB port on the side of the printer.
2. Press  (**Tools**).
3. Press **Admin**.
4. Enter the Admin password then press  (**Enter**). The default password is **1234**.

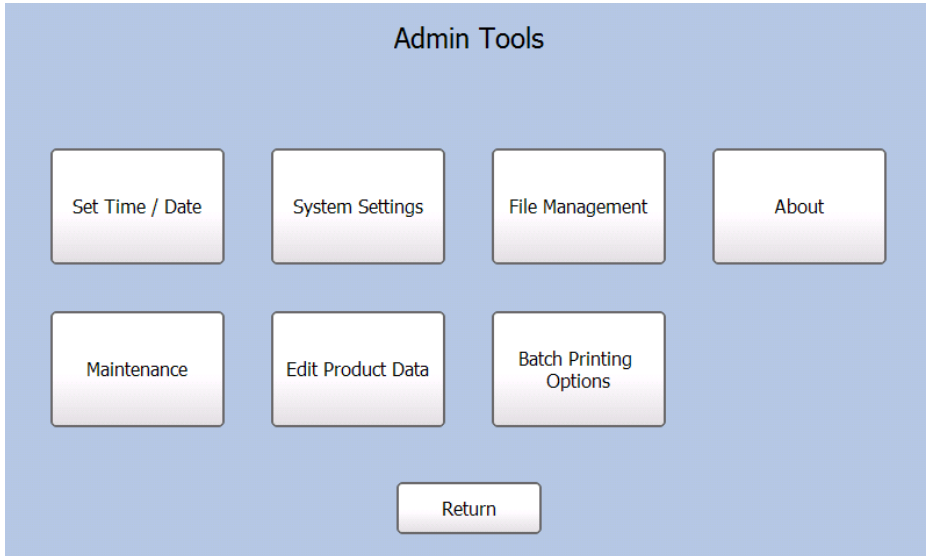

5. Press **File Management**.

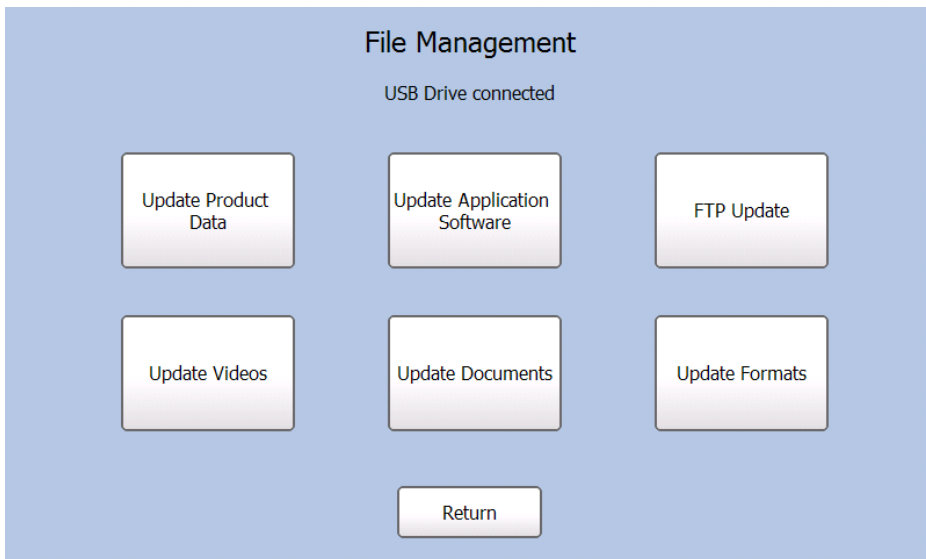

6. Press **Update Videos**.

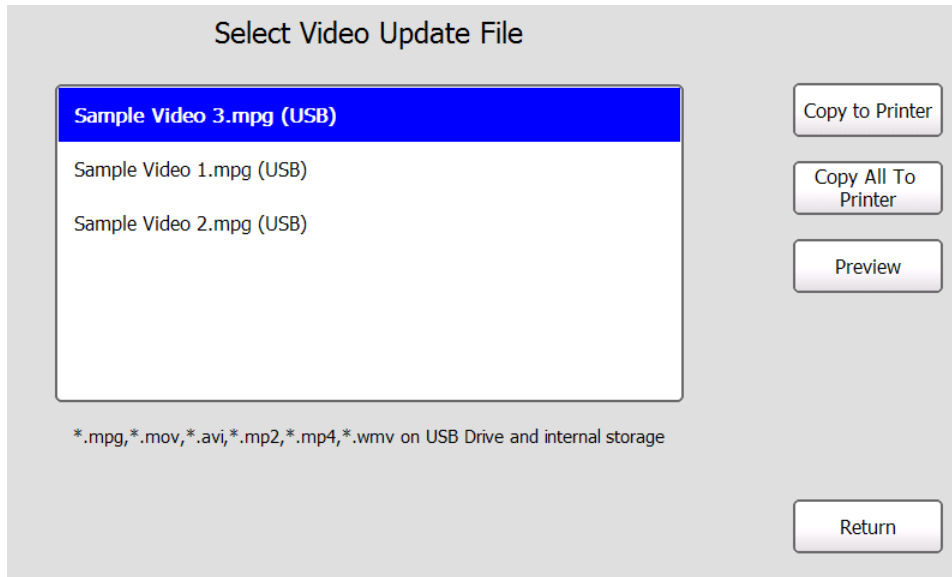

- ◆ Videos on your USB Flash Drive are indicated by (USB) after the file name. Videos already on your printer are listed without (USB).
- ◆ Press **Preview** to see a video before copying it to the printer.

7. Select the video to copy then press **Copy to Printer**.

To copy all videos on your USB Flash Drive, press **Copy All to Printer**.

8. Press **Return**.

Updating Documents

You can use a USB Flash Drive to transfer documents from your PC to your printer. Save the documents in the root directory of a USB Flash Drive.


Document Specifications

Supported document file types are:


- ◆ .pdf
- ◆ .doc, .docx
- ◆ .xls, .xlsx
- ◆ .ppt, .pptx

Transferring Documents to/from the Printer

1. Plug the USB Flash Drive into the USB port on the side of the printer.
2. Press the **Tools**  button.
3. Press **Admin**.
4. Enter the Admin password then press  (**Enter**). The default password is **1234**.

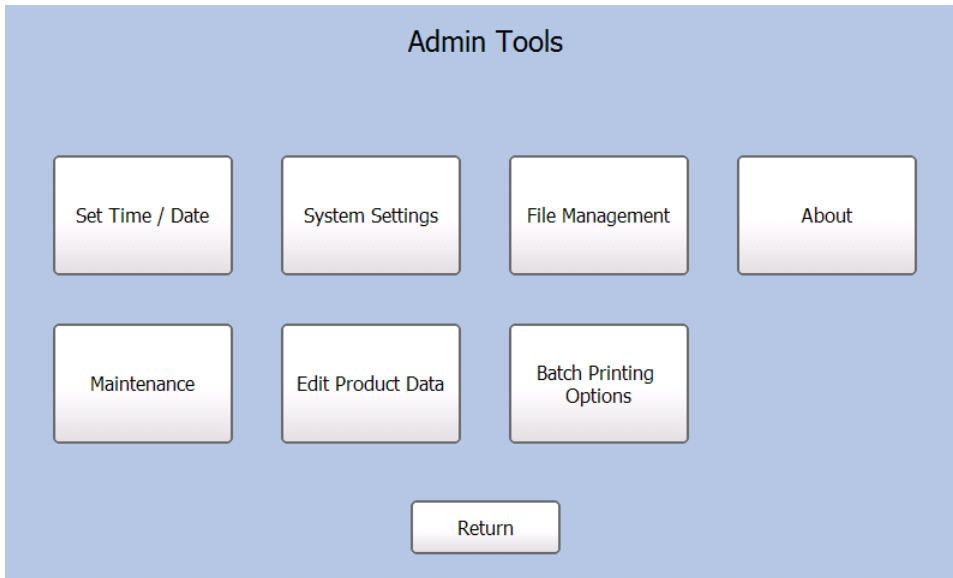


5. Press **File Management**.

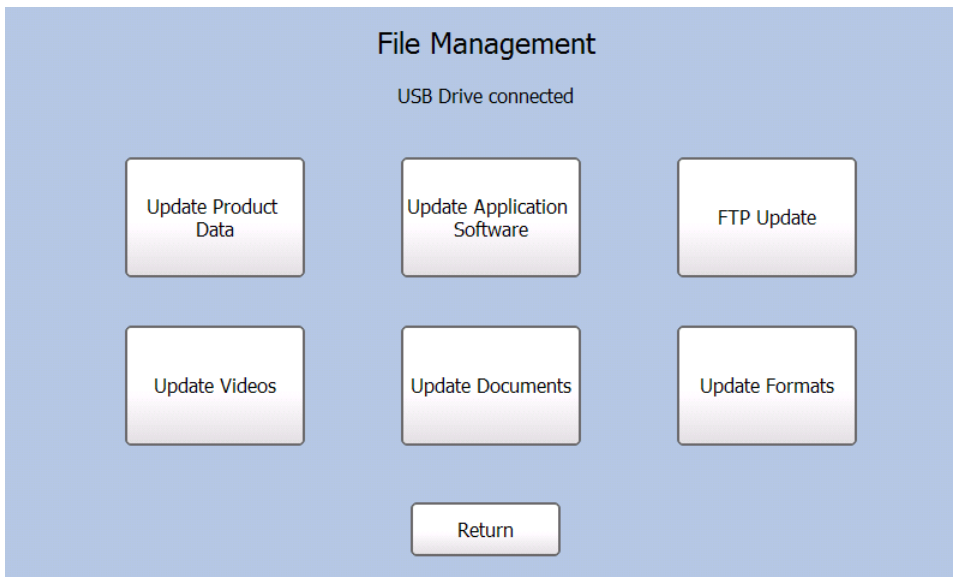

6. Press **Update Documents**.

7. Select the document to copy then press **Copy to Printer**.
To copy all documents on your USB Flash Drive, press **Copy All to Printer**.

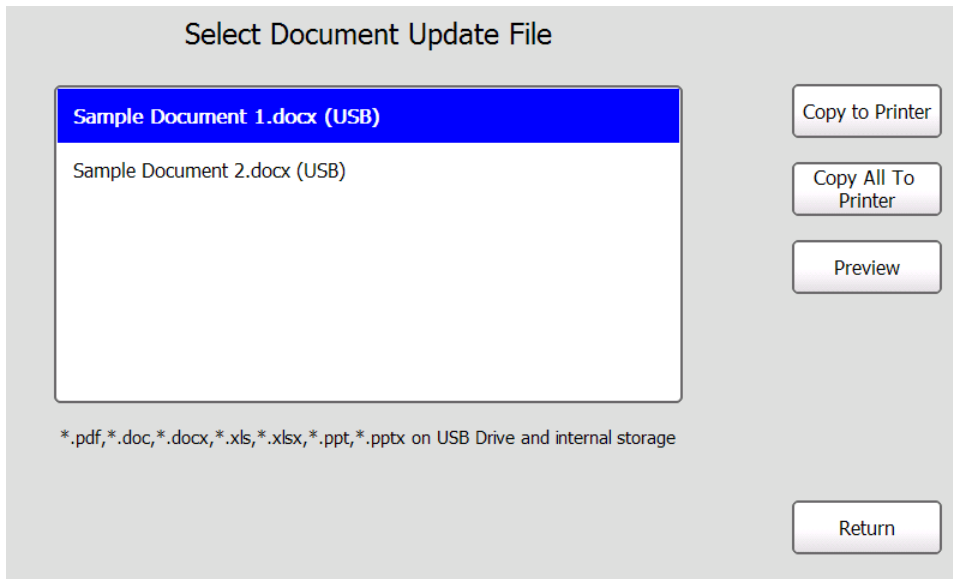

- ◆ Documents on your USB Flash Drive are indicated by (USB) after the file name. Documents already on your printer are listed without (USB).
- ◆ Press Preview to see a document before copying it to the printer.


8. Remove the USB Flash Drive.

Updating Formats


You can use a USB Flash Drive to transfer custom label formats from your PC to your printer. You must have the .LNT file and a .XML file for the custom label format. The .LNT and .XML files must have the same name and must be saved in the root directory of a USB Flash Drive. To learn more about custom label formats contact Avery Dennison.

Note: Only the .LNT file shows in the list on the printer.

1. Plug the USB Flash Drive into the USB port on the side of the printer.
2. Press the **Tools**  button.
3. Press **Admin**.
4. Enter the Admin password then press  (**Enter**). The default password is **1234**.

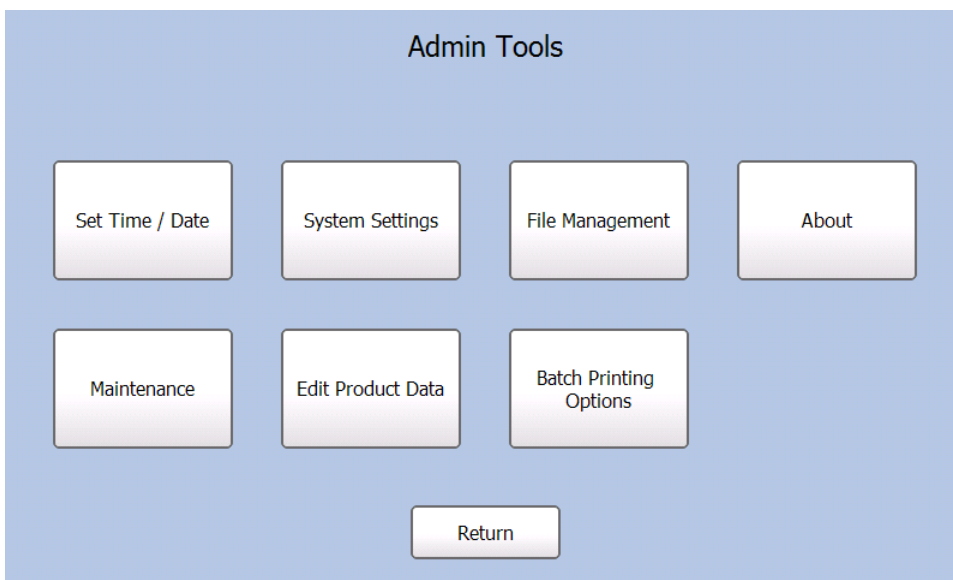


5. Press **File Management**.

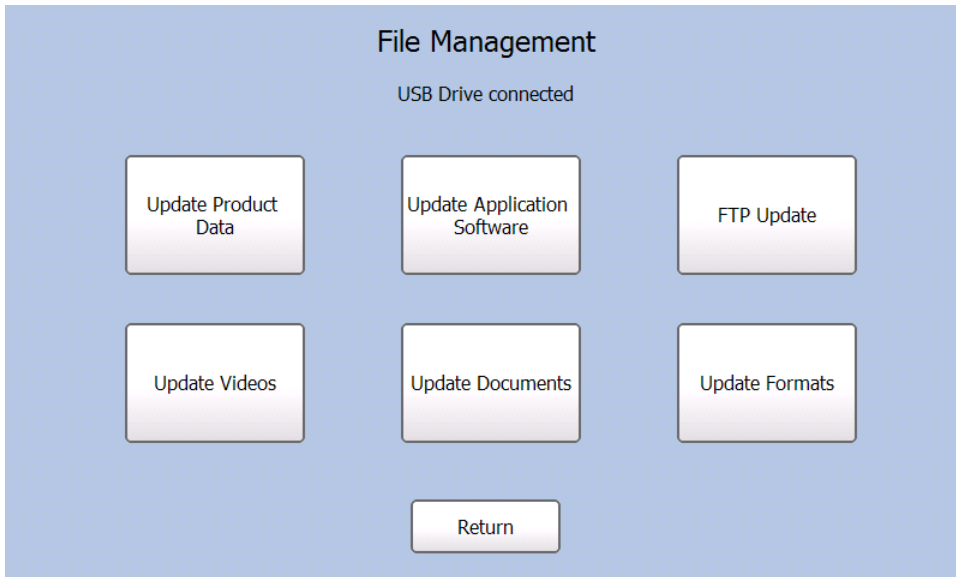

6. Press **Update Formats**.

7. Select the custom label format to copy then press **Copy to Printer**.

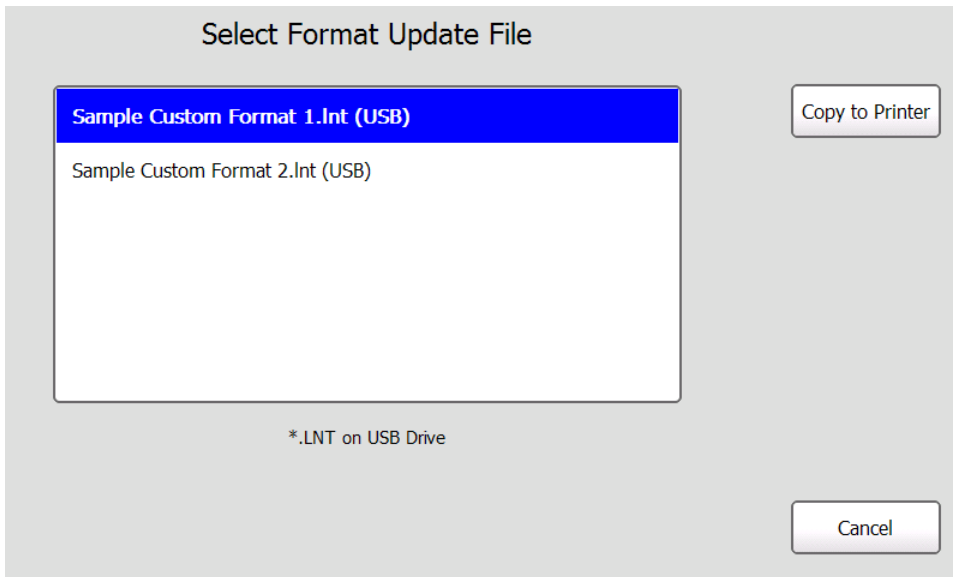

Formats on your USB Flash Drive are indicated by (USB) after the file name. Formats already on your printer are listed without (USB).


8. Remove the USB Flash Drive.

Printing Diagnostic Labels


Several diagnostic labels are available: Version Information, Network Information, Gray Scale, and Checkerboard.

To print any of the diagnostic labels:

1. Press the **Tools**  button.
2. Press **Admin**.
3. Enter the Admin password and press  (**Enter**). The default password is 1234.
4. Press **Maintenance**.

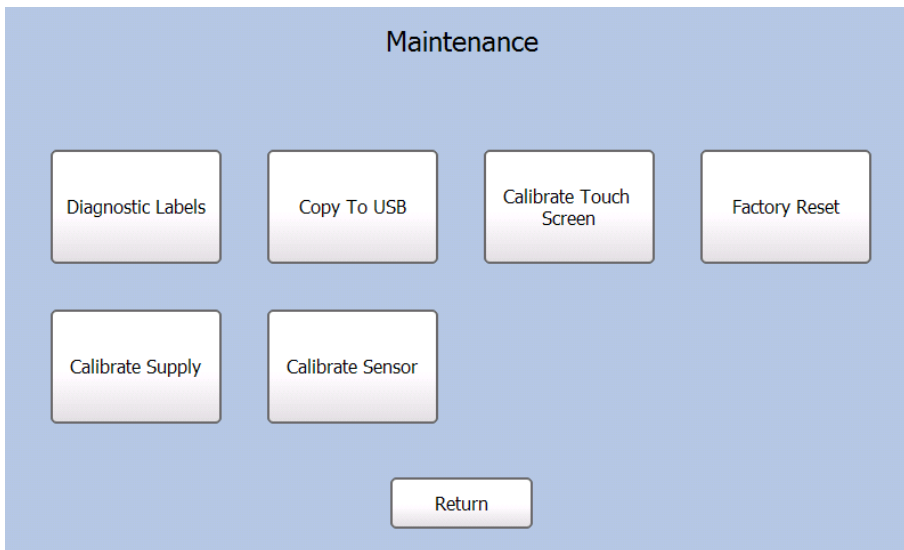

5. Press **Diagnostic Labels**.

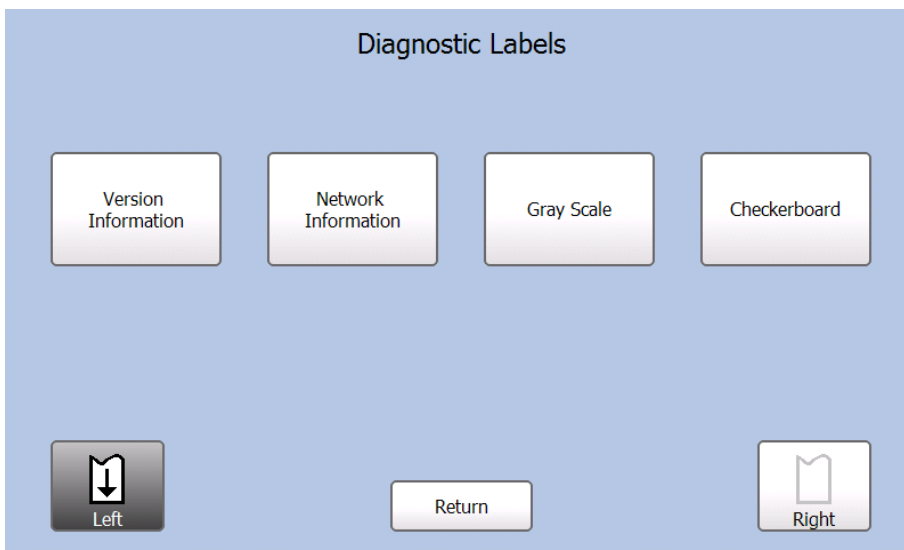

Note: On a Dual Printer, Press the Left or Right toggle button to select which printer to use.

Version Information

The Version Information label shows:

- ◆ Printer model number
- ◆ Application part number
- ◆ Application version
- ◆ Core version
- ◆ Print engine version
- ◆ Board version


Network Information

The Network Information label shows:


- ◆ Method for obtaining IP address
- ◆ IP address
- ◆ Subnet mask
- ◆ Gateway address
- ◆ MAC address.

Gray Scale

The gray scale test checks the uniformity of the printing. The printed sample should be uniformly gray across the supply. If you see voids, keep the sample and call Service.

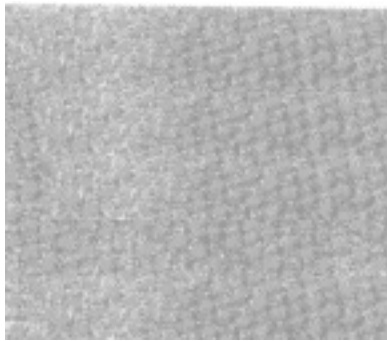


Sample

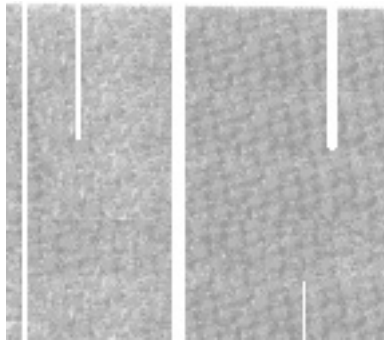

Sample with voids


Checkerboard


Prints a label to verify that the printhead strobes are working. If the printed sample has fewer lines or no lines, keep the sample and call Service.




Copying the Data File to a USB Flash Drive

You can copy the Product Data File from the printer to a USB Flash Drive.

1. Insert a USB Flash Drive into the port on the side of the printer.
2. Press  (**Tools**)..
3. Press **Admin**.

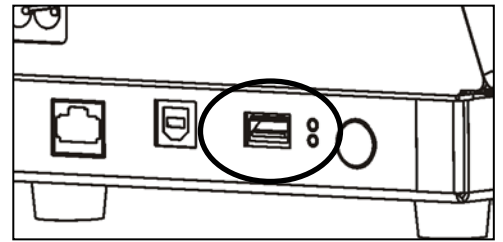

4. Enter the Admin password and press  (**Enter**). The default password is 1234.

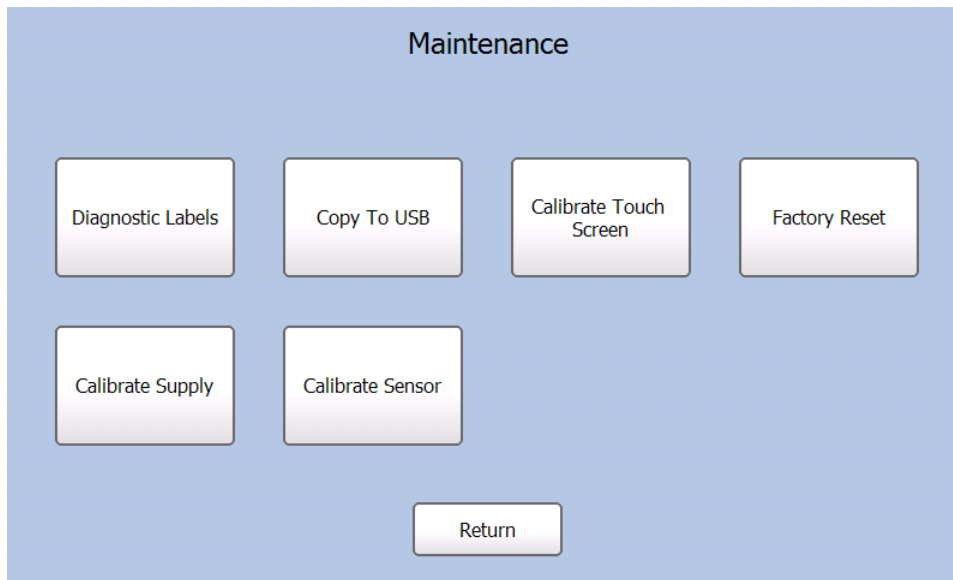


5. Press **Maintenance**.
6. Press **Copy to USB**. You see a progress bar while the file copies. When the copy is complete, you see the Maintenance screen.


Calibrating the Supply

You can calibrate the supply if your printer skips labels or prints off the label.

1. Press  (**Tools**).
2. Press **Admin**.
3. Enter the Admin password and press  (**Enter**). The default password is 1234.
4. Press **Maintenance**.

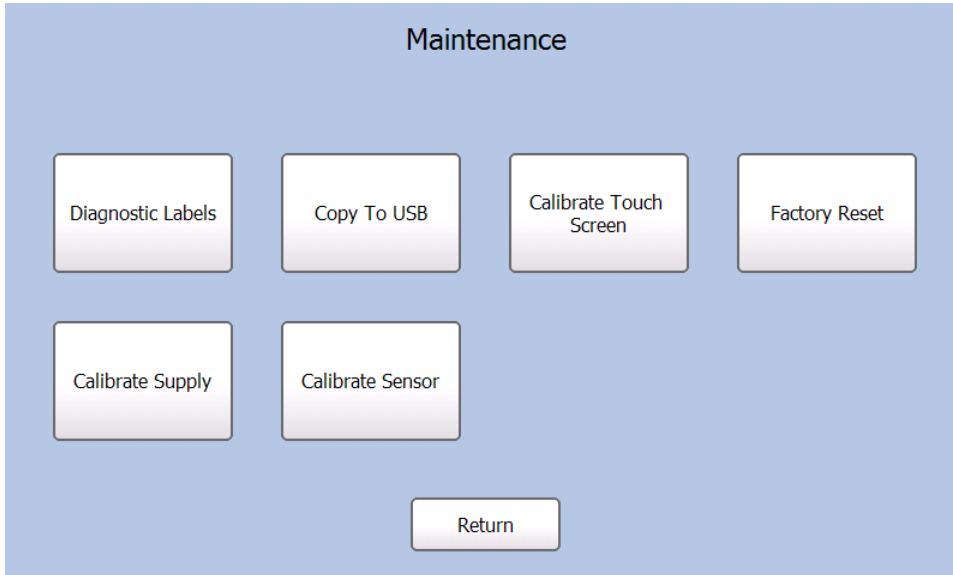

5. Press **Calibrate Supply**.

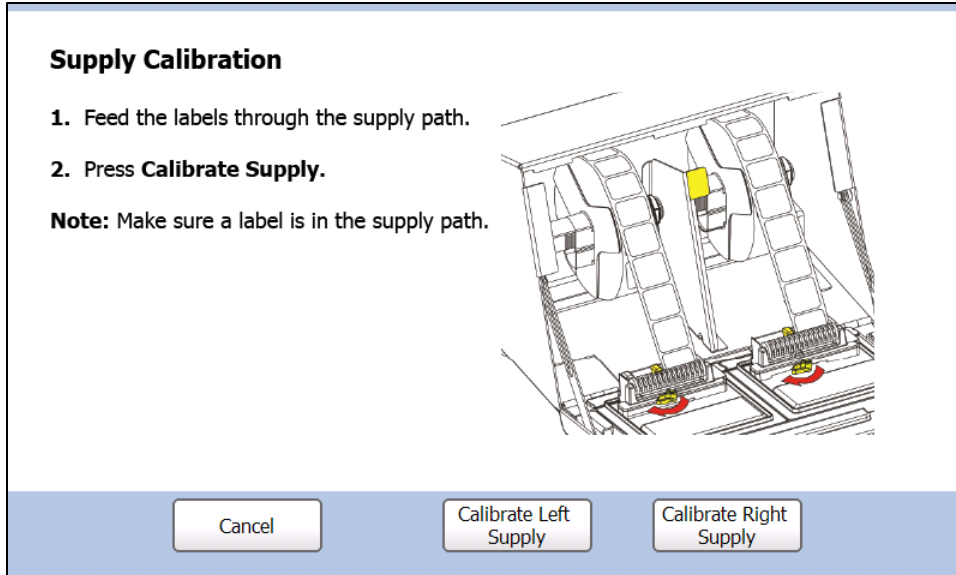


6. Load supply then press **Calibrate Left Supply** or **Calibrate Right Supply** for the printer you want to use. The printer feeds a few labels.


Calibrating the Sensor

You need to calibrate the sensor if your printer skips labels or prints off the label.


1. Press  (**Tools**).
2. Press **Admin**.
3. Enter the Admin password and press  (**Enter**). The default password is 1234.
4. Press **Maintenance**.

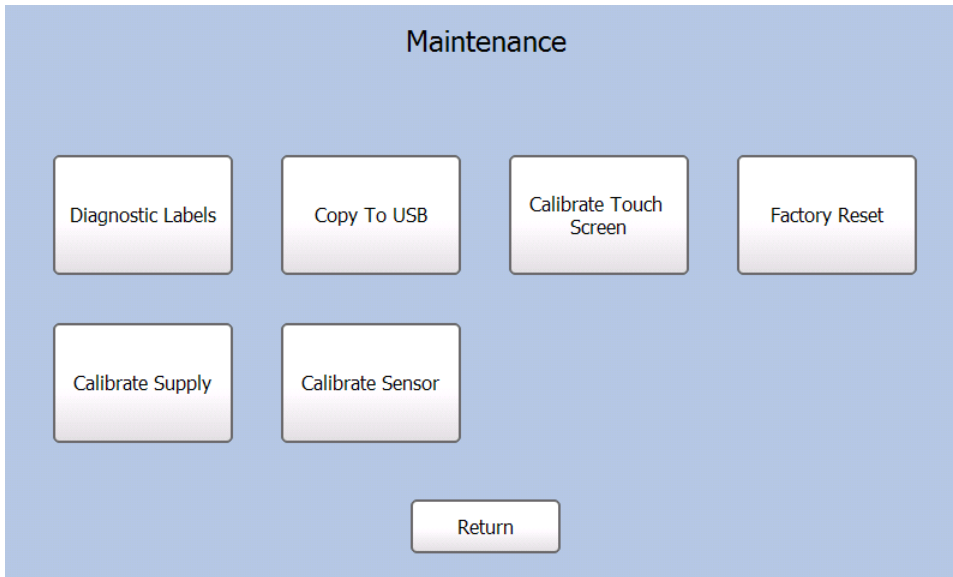

5. Press **Calibrate Sensor**.
6. Follow the on-screen instructions to properly load supply for sensor calibration.

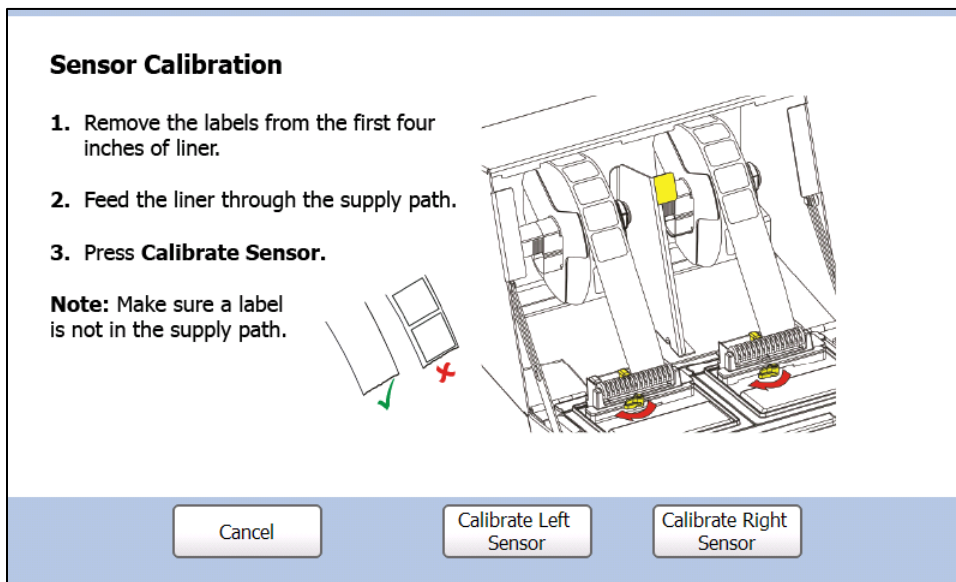

7. Press **Calibrate Left Sensor** or **Calibrate Right Sensor**.

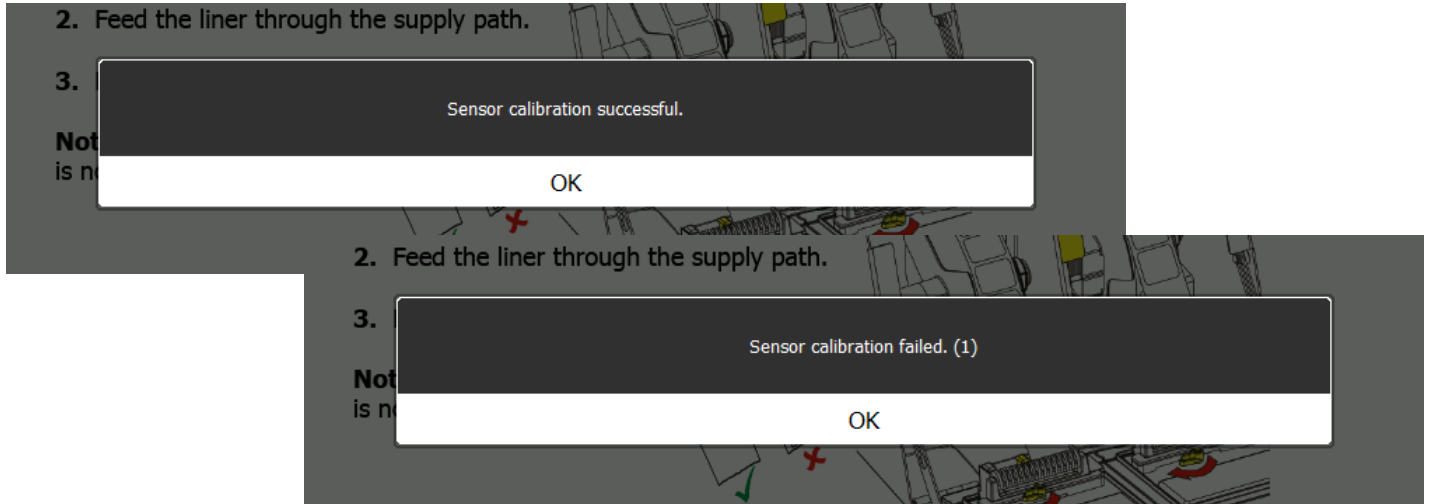


Note: A popup message appears to tell you if the calibration was successful. If calibration failed, make sure that only the liner is in the supply path and try the calibration again.

Calibrating the Touch Screen


Calibrate the touch screen so the buttons respond correctly when pressed. You are prompted to do this the first time you turn the printer on after receiving it and after you update the printer's Application Software. Follow the on-screen instructions to calibrate the touch screen. The application runs automatically when you are finished.

Note: Be sure that you only touch the screen in the center of the crosshair and that nothing touches any other part of the screen during calibration.

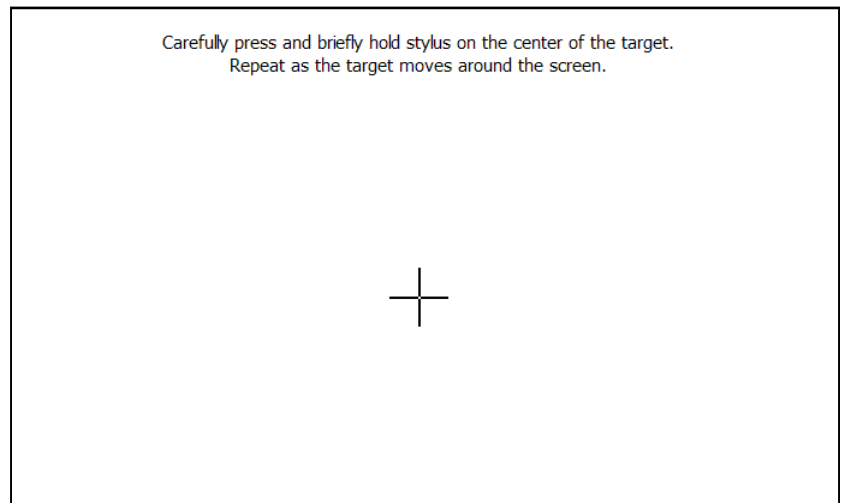

You can also calibrate the touch screen if it does not correctly respond to touch.

Use a paperclip to press and hold the button shown. Then follow the on-screen instructions to calibrate the touch screen

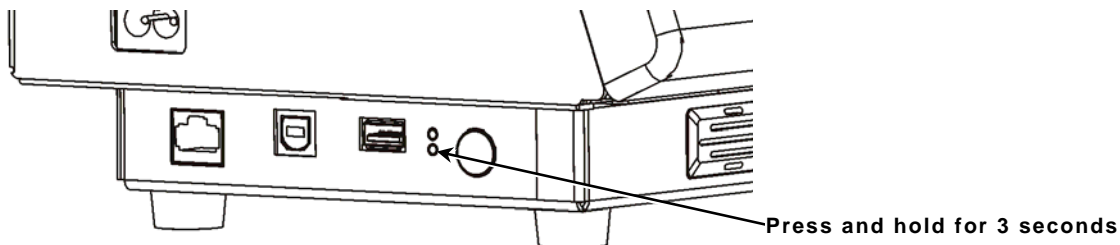


Performing a Factory Reset

Use Factory Reset to delete all data files from the printer. Data files include the product button information, password, and printer configuration settings.


It may be necessary to delete data files when there are errors in the current data files.

Note: Before deleting the printer's data files, you may want to copy the Product Data file to a USB Flash Drive. See "[Copying the Data File to a USB Flash Drive](#)" for more information.

1. Press  (**Tools**).
2. Press **Admin**.
3. Enter the Admin password and press  (**Enter**). The default password is 1234.
4. Press **Maintenance**.

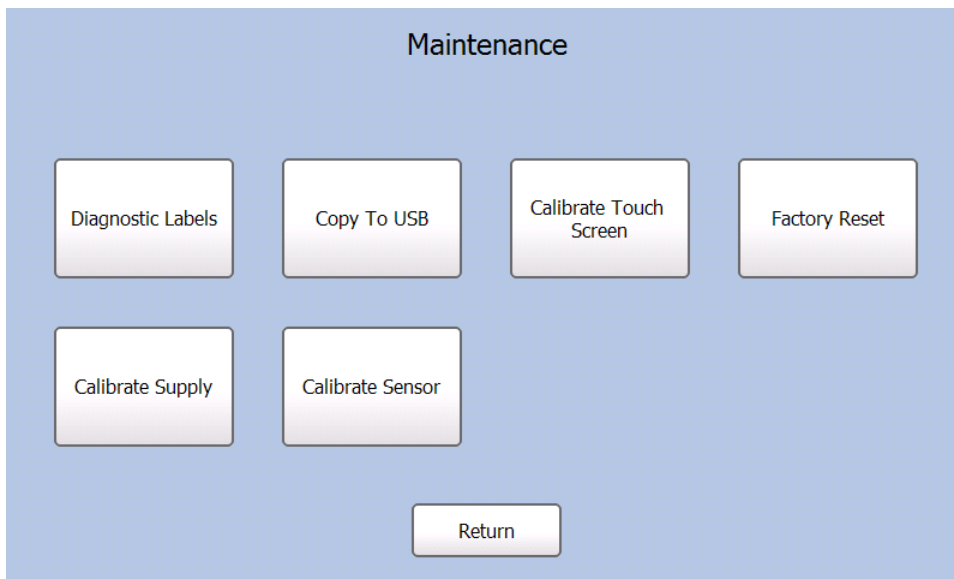

5. Press **Factory Reset**. A warning message appears.

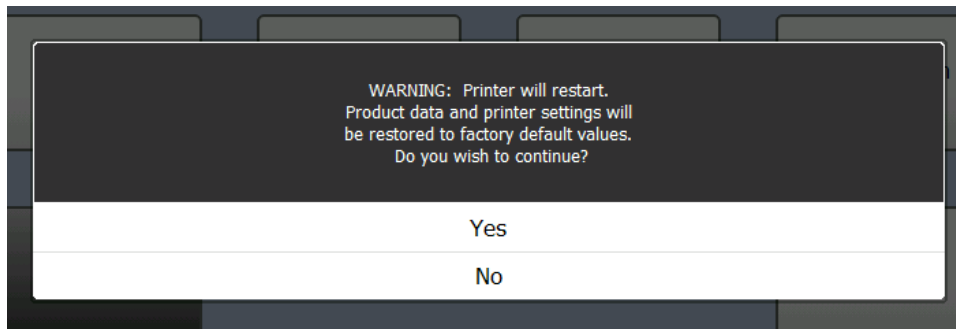

6. Press **Yes** to delete all data files. The printer deletes all data files and loads the default data files. The printer restarts. Press **No** to cancel.

Note: All data files are deleted when you select **Yes**; *they cannot be recovered*. You cannot select a specific file to delete.

LABEL FORMATS

This appendix shows a sample of each label format.

Note: If an asterisk (*) prints after the time or date, the label was reprinted using the original expiration time or date. See “Setting the Manager Options” for more information.

Format 1

Prints 1.2” wide x 1.1” long labels.

```

Description 1
Description 2
Description 3
PREP          EMPL
MM/DD/YY HH:MM:PM
MUST USE BY
HH:MM:PM
MM/DD/YY
  
```

Enter the following information for each field:

Field	Description
<i>Description 1</i>	Prints up to 17 characters.
<i>Description 2</i>	Prints up to 17 characters.
<i>Description 3</i>	Prints up to 17 characters.
<i>EMPL</i>	Employee ID must be 2-10 characters.
<i>Must Use By</i>	Numbers only. Days 0-365, hours 0-23, minutes 0-59.

Note: The employee ID number does not print if Employee Login is not enabled.

Format 2

Prints 1.2” wide x 1.1” long labels.

```

Description 1
Description 2
PREP          EMPL
MM/DD/YY HH:MM:PM
READY
MM/DD/YY HH:MM:PM
MUST USE BY
MM/DD/YY HH:MM:PM
  
```

Enter the following information for each field:

Field	Description
<i>Description 1</i>	Prints up to 17 characters.
<i>Description 2</i>	Prints up to 17 characters.
<i>EMPL</i>	Employee ID must be 2-10 characters.
<i>Prep</i>	Numbers only. Days 0-365, hours 0-23, minutes 0-59.
<i>Ready</i>	Numbers only. Days 0-365, hours 0-23, minutes 0-59.
<i>Must Use By</i>	Numbers only. Days 0-365, hours 0-23, minutes 0-59.

Note: The employee ID number does not print if Employee Login is not enabled.

Format 3

Prints 2.2" wide x 1.1" long labels.

```
Description 1
Description 2
      PREP
MM/DD/YY      HH:MM:PM  EMPL
      MUST USE BY
MM/DD/YY  HH:MM:PM
```

Enter the following information for each field:

Field	Description
<i>Description 1</i>	Prints up to 35 characters.
<i>Description 2</i>	Prints up to 35 characters.
<i>EMPL</i>	Employee ID must be 2-10 characters.
<i>Prep</i>	Numbers only. Days 0-365, hours 0-23, minutes 0-59.
<i>Must Use By</i>	Numbers only. Days 0-365, hours 0-23, minutes 0-59.

Note: The employee ID number does not print if Employee Login is not enabled.

Format 4

Prints 2.2" wide x 1.5" long labels.

```
Description 1
Description 2
PREP      PREP
MM/DD/YY  HH:MM:PM
MUST USE BY  MUST USE BY
MM/DD/YY  HH:MM:PM
           EMPL
```


Enter the following information for each field:

Field	Description
<i>Description 1</i>	Prints up to 25 characters.
<i>Description 2</i>	Prints up to 25 characters.
<i>EMPL</i>	Employee ID must be 2-10 characters.
<i>Prep</i>	Numbers only. Days 0-365, hours 0-23, minutes 0-59.
<i>Must Use By</i>	Numbers only. Days 0-365, hours 0-23, minutes 0-59.

Note: The employee ID number does not print if Employee Login is not enabled.

Format 5

Prints 2.2" wide x 1.5" long labels.

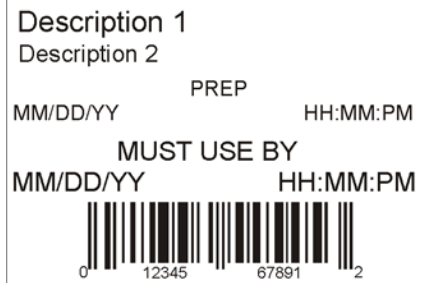


Enter the following information for each field:

Field	Description
<i>Description 1</i>	Prints up to 25 characters.
<i>Description 2</i>	Prints up to 25 characters.
<i>Prep</i>	Numbers only. Days 0-365, hours 0-23, minutes 0-59.
<i>Must Use By</i>	Numbers only. Days 0-365, hours 0-23, minutes 0-59.

Format 6

Prints 2.2" wide x 3.0" long labels.

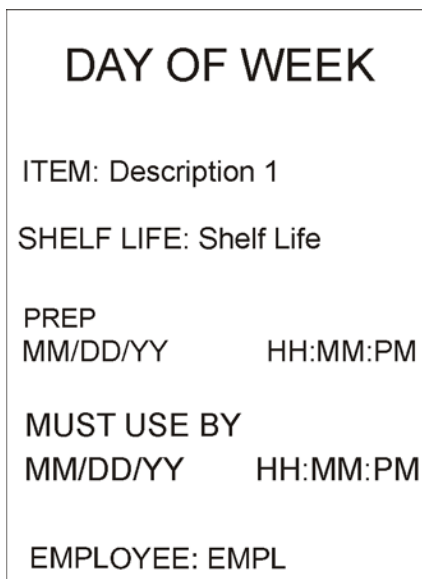


Enter the following information for each field:

Field	Description
<i>Description</i>	Prints up to 16 characters.
<i>Shelf Life</i>	Prints up to 13 characters.
<i>EMPL</i>	Employee ID must be 2-10 characters.
<i>Prep</i>	Numbers only. Days 0-365, hours 0-23, minutes 0-59.
<i>Must Use By</i>	Numbers only. Days 0-365, hours 0-23, minutes 0-59.

Note: The employee ID number does not print if Employee Login is not enabled.

Format 7

Prints 2.2" wide x 2.0" long labels.

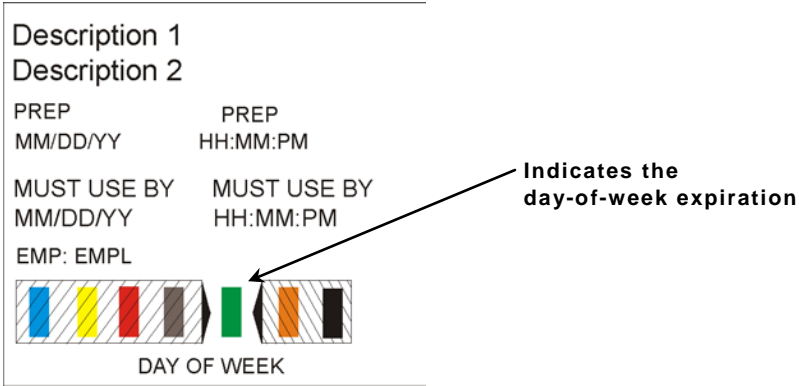

Note: Arrows point to the block that corresponds to the day-of-week expiration date while diagonal lines print through the color-coded boxes that do not apply.


Enter the following information for each field:

Field	Description
<i>Description 1</i>	Prints up to 15 characters.
<i>Description 2</i>	Prints up to 15 characters
<i>EMPL</i>	Employee ID must be 2-10 characters.
<i>Prep</i>	Numbers only. Days 0-365, hours 0-23, minutes 0-59.
<i>Must Use By</i>	Numbers only. Days 0-365, hours 0-23, minutes 0-59.
<i>Blue</i>	Use by Monday.
<i>Yellow</i>	Use by Tuesday.
<i>Red</i>	Use by Wednesday.
<i>Brown</i>	Use by Thursday.
<i>Green</i>	Use by Friday.
<i>Orange</i>	Use by Saturday.
<i>Black</i>	Use by Sunday.

Note: The employee ID number does not print if Employee Login is not enabled.

Format 8

Prints 1.2" wide x 1.1" long labels.

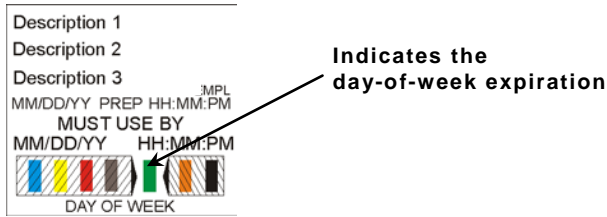

Note: Arrows point to the block that corresponds to the day-of-week expiration date while diagonal lines print through the color-coded boxes that do not apply.

Enter the following information for each field:

Field	Description
<i>Description 1</i>	Prints up to 17 characters.
<i>Description 2</i>	Prints up to 17 characters.
<i>Description 3</i>	Prints up to 17 characters.
<i>EMPL</i>	Employee ID must be 2-10 characters.
<i>Prep</i>	Numbers only. Days 0-365, hours 0-23, minutes 0-59.
<i>Must Use By</i>	Numbers only. Days 0-365, hours 0-23, minutes 0-59.
<i>Blue</i>	Use by Monday.
<i>Yellow</i>	Use by Tuesday.
<i>Red</i>	Use by Wednesday.
<i>Brown</i>	Use by Thursday.
<i>Green</i>	Use by Friday.
<i>Orange</i>	Use by Saturday.
<i>Black</i>	Use by Sunday.

Note: The employee ID number does not print if Employee Login is not enabled.

Format 10

Prints 2.2" wide x 4.0" long labels.

Enter the following information for each field:

Field	Description
<i>Store Name</i>	Prints up to 17 characters.
<i>Description 1</i>	Prints up to 23 characters.
<i>Description 2</i>	Prints up to 23 characters.
<i>Ingredients</i>	Prints up to 875 characters.
<i>Allergens</i>	Prints up to 50 characters.
<i>Prep</i>	Prints the date in MM/DD/YY format.
<i>Must Use By</i>	Prints the date in MM/DD/YY format.
<i>Net Weight</i>	Prints up to 8 characters.
<i>Price</i>	Prints up to 7 characters: numbers 0-9, period, dollar, cents, Euro, pound, and yen signs
<i>Store Address</i>	Prints up to 45 characters on Line 1 Prints up to 45 characters on Line 2

Store Name

Description 1

Description 2

INGREDIENTS:

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Sed varius laoreet lacus vel fringilla. Duis lacinia sem tortor, sit amet dapibus erat fermentum id. Ut ut tellus et urna finibus dictum. Vivamus non diam in urna semper eleifend. Mauris viverra turpis et mauris auctor sodales. Duis tincidunt commodo ligula, vitae aliquet massa tempus sed. Aliquam ac ligula sit amet felis posuere congue vel sed sem. Nulla porta condimentum enim, et dapibus ipsum lacinia tincidunt. Etiam et facilisis risus. Nullam finibus nisi non elementum placerat. Phasellus eu efficitur mauris. Sed bibendum convallis sollicitudin. Ut vitae nisi in ligula condimentum tempor. Aenean vulputate felis dolor, at cursus purus tristique id. Sed viverra neque sed leo vehicula, eget tincidunt lacus tincidunt. Aenean vehicula, odio non mollis imperdiet, sapien metus hendrerit est, sit amet facilisis

ALLERGENS:

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Sed varius laoreet lacus vel fringilla. Duis lacinia sem tortor, sit amet dapibus erat fermentum

PREP MM/DD/YY



MUST USE BY MM/DD/YY
Net Weight Price

STORE ADDRESS LINE 1
ADDRESS LINE 2/PHONE NUMBER

Format 11

Prints 2.2" wide x 4.0" long labels.

Enter the following information for each field:

Field	Description
<i>Store Name</i>	Prints up to 17 characters.
<i>Description 1</i>	Prints up to 23 characters.
<i>Description 2</i>	Prints up to 23 characters.
<i>Description 3</i>	Prints up to 23 characters.
<i>Ingredients</i>	Prints up to 875 characters.
<i>Must Use By</i>	Prints the date in MM/DD/YY format.
<i>Net Weight</i>	Prints up to 8 characters.
<i>Price</i>	Prints up to 7 characters: numbers 0-9, period, dollar, cents, Euro, pound, and yen signs..

Store Name

Description 1

Description 2

Description 3

INGREDIENTS:

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Sed varius laoreet lacus vel fringilla. Duis lacinia sem tortor, sit amet dapibus erat fermentum id. Ut ut tellus et urna finibus dictum. Vivamus non diam in urna semper eleifend. Mauris viverra turpis et mauris auctor sodales. Duis tincidunt commodo ligula, vitae aliquet massa tempus sed. Aliquam ac ligula sit amet felis posuere congue vel sed sem. Nulla porta condimentum enim, et dapibus ipsum lacinia tincidunt. Etiam et facilisis risus. Nullam finibus nisi non elementum placerat. Phasellus eu efficitur mauris. Sed bibendum convallis sollicitudin. Ut vitae nisi in ligula condimentum tempor. Aenean vulputate felis dolor, at cursus purus tristique id. Sed viverra neque sed leo vehicula, eget tincidunt lacus tincidunt. Aenean vehicula, odio non mollis imperdiet, sapien metus hendrerit est, sit amet facilisis

MUST USE BY MM/DD/YY

Net Weight Price

Format 12

Prints 2.2" wide x 4.0" long labels.

Enter the following information for each field:

Field	Description
<i>Store Name</i>	Prints up to 17 characters.
<i>Description 1</i>	Prints up to 23 characters.
<i>Description 2</i>	Prints up to 23 characters.
<i>Ingredients</i>	Prints up to 875 characters.
<i>Must Use By</i>	Prints the date in MM/DD/YY format.
<i>Net Weight</i>	Prints up to 8 characters.
<i>Price</i>	Prints up to 7 characters: numbers 0-9, period, dollar, cents, Euro, pound, and yen signs..

Store Name

Description 1

Description 2

INGREDIENTS:

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Sed varius laoreet lacus vel fringilla. Duis lacinia sem tortor, sit amet dapibus erat fermentum id. Ut ut tellus et urna finibus dictum. Vivamus non diam in urna semper eleifend. Mauris viverra turpis et mauris auctor sodales. Duis tincidunt commodo ligula, vitae aliquet massa tempus sed. Aliquam ac ligula sit amet felis posuere congue vel sed sem. Nulla porta condimentum enim, et dapibus ipsum lacinia tincidunt. Etiam et facilisis risus. Nullam finibus nisi non elementum placerat. Phasellus eu efficitur mauris. Sed bibendum convallis sollicitudin. Ut vitae nisi in ligula condimentum tempor. Aenean vulputate felis dolor, at cursus purus tristique id. Sed viverra neque sed leo vehicula, eget tincidunt lacus tincidunt. Aenean vehicula, odio non mollis imperdiet, sapien metus hendrerit est, sit amet facilisis

MUST USE BY MM/DD/YY

Net Weight

Price

Format 20

Prints 2.2" wide x 3.0" long labels.

Enter the following information for each field:

Field	Description
<i>Description 1</i>	Prints up to 23 characters.
<i>Serving Size</i>	Prints up to 25 characters.
<i>Servings Per Container</i>	Prints up to 10 characters.
<i>Calories</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Fat Calories</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Total Fat (g & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Saturated Fat (g & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Trans Fat</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Cholesterol (mg & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Sodium (mg & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Total Carbs (g & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Dietary Fiber (g & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Sugars (g)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Protein (g)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Vitamin A (%)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Vitamin C (%)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Iron (%)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Calcium (%)</i>	Prints up to 6 characters: numbers 0-9 and period only.

Description 1

Nutrition Facts

Serving Size

Servings Per Container

Amount Per Serving

Calories	Calories from Fat
	% Daily Value *

Total Fat

Saturated Fat

Trans Fat

Cholesterol

Sodium

Total Carbohydrates

Dietary Fiber

Sugar

Protein

Vitamin A

Vitamin C

Calcium

Iron

* Percent Daily Values are based on a 2,000 Calorie diet. Your Daily Values may be higher or lower depending on your calorie needs.

Format 21

Prints 2.2" wide x 4.0" long labels.


Enter the following information for each field:

Field	Description
<i>Store Name</i>	Prints up to 17 characters.
<i>Description 1</i>	Prints up to 23 characters.
<i>Description 2</i>	Prints up to 23 characters.
<i>Serving Size</i>	Prints up to 25 characters.
<i>Servings Per Container</i>	Prints up to 10 characters.
<i>Calories</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Fat Calories</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Total Fat (g & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Saturated Fat (g & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Trans Fat</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Cholesterol (mg & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Sodium (mg & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Total Carbs (g & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Dietary Fiber (g & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Sugars (g)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Protein (g)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Vitamin A (%)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Vitamin C (%)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Iron (%)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Calcium (%)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Barcode</i>	Prints a UPC-A, EAN-8, EAN-13, Code 30 Barcode.
<i>Must Use By</i>	Prints the date in MM/DD/YY format.
<i>Net Weight</i>	Prints up to 8 characters.
<i>Price</i>	Prints up to 7 characters: numbers 0-9, period, dollar, cents, Euro, pound, and yen signs..
<i>Store Address</i>	Prints up to 45 characters on Line 1 Prints up to 45 characters on Line 2

Store Name
Description 1
Description 2

Nutrition Facts	
Serving Size	
Servings Per Container	
Amount Per Serving	
Calories	Calories from Fat % Daily Value *
Total Fat	
Saturated Fat	
Trans Fat	
Cholesterol	
Sodium	
Total Carbohydrates	
Dietary Fiber	
Sugar	
Protein	
Vitamin A *	Vitamin C
Calcium *	Iron

* Percent Daily Values are based on a 2,000 Calorie diet. Your Dail Values may be higher or lower depending on your calorie needs.



0 12345 67891 2

MUST USE BY MM/DD/YY

Net Weight Price

STORE ADDRESS LINE 1

ADDRESS LINE 2/PHONE NUMBER

Format 22

Prints 2.2" wide x 4.0" long labels.

Enter the following information for each field:

Field	Description
<i>Store Name</i>	Prints up to 17 characters.
<i>Description 1</i>	Prints up to 23 characters.
<i>Description 2</i>	Prints up to 23 characters.
<i>Calories</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Fat Calories</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Total Fat (g & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Saturated Fat (g & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Trans Fat</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Cholesterol (mg & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Sodium (mg & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Total Carbs (g & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Dietary Fiber (g & %)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Sugars (g)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Protein (g)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Vitamin A (%)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Vitamin C (%)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Iron (%)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Calcium (%)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Ingredients</i>	Prints up to 875 characters.
<i>Allergens</i>	Prints up to 50 characters.
<i>Barcode</i>	Prints a UPC-A, EAN-8, EAN-13, Code 30 Barcode.
<i>Must Use By</i>	Prints the date in MM/DD/YY format.
<i>Net Weight</i>	Prints up to 8 characters.
<i>Price</i>	Prints up to 7 characters: numbers 0-9, period, dollar, cents, Euro, pound, and yen signs.
<i>Store Address</i>	Prints up to 45 characters on Line 1 Prints up to 45 characters on Line 2

Store Name
Description 1
Description 2

Nutrition Facts	
Calories	Calories from Fat
	% Daily Value *
Total Fat	
Saturated Fat	
Trans Fat	
Cholesterol	
Sodium	
Total Carbohydrates	
Dietary Fiber	
Sugar	
Protein	
Vitamin A *	Vitamin C
Calcium *	Iron

(INGREDIENTS) Lorem ipsum dolor sit amet, consectetur adipiscing elit. Sed varius laoreet lacus vel fringilla. Duis lacinia sem tortor, sit amet dapibus erat fermentum. Lorem ipsum dolor sit amet

(ALLERGENS) Lorem ipsum dolor sit amet, consectetur



MUST USE BY MM/DD/YY

Net Weight Price

STORE ADDRESS LINE 1
ADDRESS LINE 2/PHONE NUMBER

Format 30

Prints 2.2" wide x 3.0" long labels.

Enter the following information for each field:

Field	Description
<i>Store Name</i>	Prints up to 17 characters.
<i>Description 1</i>	Prints up to 23 characters.
<i>Description 2</i>	Prints up to 23 characters.
<i>Each serving (XXg) contains</i>	Prints up to 28 characters.
<i>Energy (kJ and kcal)</i>	Prints up to 6 characters: numbers 0-9 and period only..
<i>Fat</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>of which saturates</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Carbohydrate</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>of which sugars</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Fibre</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Protein</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Salt</i>	Prints up to 6 characters: numbers 0-9 and period only.


Store Name		
Description 1		
Description 2		
Nutrition		
Typical values	100g contains	Each serving (XX g) contains
Energy	kJ	kJ
Fat	kcal	kcal
of which saturates	g	g
Carbohydrate	g	g
of which sugars	g	g
Fibre	g	g
Protein	g	g
Salt	g	g

Format 31

Prints 2.2" wide x 4.0" long labels.

Enter the following information for each field:

Field	Description
<i>Store Name</i>	Prints up to 17 characters.
<i>Description 1</i>	Prints up to 23 characters.
<i>Description 2</i>	Prints up to 23 characters.
<i>Each serving (XXg) contains</i>	Prints up to 28 characters.
<i>Energy (kJ and kcal)</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Fat</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>of which saturates</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Carbohydrate</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>of which sugars</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Fibre</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Protein</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Salt</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Prep</i>	Prints the date in MM/DD/YY format.
<i>Barcode</i>	Prints a UPC-A, EAN-8, EAN-13, Code 30 Barcode.
<i>Must Use By</i>	Prints the date in MM/DD/YY format.
<i>Net Weight</i>	Prints up to 8 characters.
<i>Price</i>	Prints up to 7 characters: numbers 0-9, period, dollar, cents, Euro, pound, and yen signs.
<i>Store Address</i>	Prints up to 45 characters on Line 1 Prints up to 45 characters on Line 2

Store Name		
Description 1		
Description 2		
Nutrition		
Typical values	100g contains	Each serving (XX g) contains
Energy	kJ	kJ
	kcal	kcal
Fat	g	g
of which saturates	g	g
Carbohydrate	g	g
of which sugars	g	g
Fibre	g	g
Protein	g	g
Salt	g	g
Prep: MM/DD/YYYY		
		
MUST USE BY MM/DD/YY		
Net Weight		Price
STORE ADDRESS LINE 1		
ADDRESS LINE 2/PHONE NUMBER		

Format 32

Prints 2.2" wide x 4.0" long labels.

Enter the following information for each field:


Field	Description
<i>Store Name</i>	Prints up to 17 characters.
<i>Description 1</i>	Prints up to 23 characters.
<i>Description 2</i>	Prints up to 23 characters.
<i>Each serving (XXg) contains</i>	Prints up to 28 characters.
<i>Energy (kJ and kcal)</i>	Prints up to 6 characters: numbers 0-9.
<i>Fat</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>of which saturates</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Carbohydrate</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>of which sugars</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Fibre</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Protein</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Salt</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Ingredients</i>	Prints up to 875 characters.
<i>Allergens</i>	Prints up to 50 characters.
<i>Barcode</i>	Prints a UPC-A, EAN-8, EAN-13, Code 30 Barcode.
<i>Must Use By</i>	Prints the date in MM/DD/YY format.
<i>Net Weight</i>	Prints up to 8 characters.
<i>Price</i>	Prints up to 7 characters: numbers 0-9, period, dollar, cents, Euro, pound, and yen signs.
<i>Store Address</i>	Prints up to 45 characters on Line 1 Prints up to 45 characters on Line 2

Store Name
Description 1
Description 2

Nutrition		
Typical values	100g contains	Each serving (XX g) contains
Energy	kJ	kJ
	kcal	kcal
Fat	g	g
of which saturates	g	g
Carbohydrate	g	g
of which sugars	g	g
Fibre	g	g
Protein	g	g
Salt	g	g

(INGREDIENTS) Lorem ipsum dolor sit amet, consectetur adipiscing elit. Sed varius laoreet lacus vel fringilla. Duis lacinia sem tortor, sit amet dapibus erat fermentum. Lorem ipsum dolor sit amet

(ALLERGENS) Lorem ipsum dolor sit amet, consectetur



0 12345 67891 2

MUST USE BY MM/DD/YY

Net Weight Price

STORE ADDRESS LINE 1
ADDRESS LINE 2/PHONE NUMBER

Format 40

Prints 2.2" wide x 3.0" long labels.

Enter the following information for each field:

Field	Description
<i>Store Name</i>	Prints up to 17 characters.
<i>Description 1</i>	Prints up to 23 characters.
<i>Description 2</i>	Prints up to 23 characters.
<i>Servings per pack</i>	Prints up to 10 characters.
<i>Serving Size</i>	Prints up to 25 characters.
<i>Energy</i>	Prints up to 6 characters: numbers 0-9 and period only..
<i>Protein</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Fat</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Saturated</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Carbohydrate</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Sugars</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Sodium</i>	Prints up to 6 characters: numbers 0-9 and period only.

Store Name

Description 1

Description 2

NUTRITION INFORMATION

Servings per pack

Serving Size

	Quantity per Serve	Quantity per 100g
Energy (kJ)	kJ	kJ
Protein (g)	g	g
Fat - Total (g)	g	g
-Saturated (g)	g	g
Carbohydrate - Total (g)	g	g
-Sugars (g)	g	g
Sodium (mg)	mg	mg

Format 41

Prints 2.2" wide x 4.0" long labels.

Enter the following information for each field:

Field	Description
<i>Store Name</i>	Prints up to 17 characters.
<i>Description 1</i>	Prints up to 23 characters.
<i>Description 2</i>	Prints up to 23 characters.
<i>Servings per pack</i>	Prints up to 10 characters.
<i>Serving Size</i>	Prints up to 25 characters.
<i>Energy (kJ)</i>	Prints up to 6 characters: numbers 0-9.
<i>Protein</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Fat</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Saturated</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Carbohydrate</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Sugars</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Sodium</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Prep</i>	Prints the date in MM/DD/YY format.
<i>Barcode</i>	Prints a UPC-A, EAN-8, EAN-13, Code 30 Barcode.
<i>Must Use By</i>	Prints the date in MM/DD/YY format.
<i>Net Weight</i>	Prints up to 8 characters.
<i>Price</i>	Prints up to 7 characters: numbers 0-9, period, dollar, cents, Euro, pound, and yen signs.
<i>Store Address</i>	Prints up to 45 characters on Line 1 Prints up to 45 characters on Line 2

Store Name
Description 1
Description 2

NUTRITION INFORMATION
Servings per pack
Serving Size

	Quantity per Serve	Quantity per 100g
Energy (kJ)		
Protein (g)		
Fat - Total (g)		
-Saturated (g)		
Carbohydrate - Total (g)		
-Sugars (g)		
Sodium (mg)		

Prep: MM/DD/YYYY



0 12345 67891 2

MUST USE BY MM/DD/YY
Net Weight Price
STORE ADDRESS LINE 1
ADDRESS LINE 2/PHONE NUMBER

Format 42

Prints 2.2" wide x 4.0" long labels.

Enter the following information for each field:

Field	Description
<i>Store Name</i>	Prints up to 17 characters.
<i>Description 1</i>	Prints up to 23 characters.
<i>Description 2</i>	Prints up to 23 characters.
<i>Servings per pack</i>	Prints up to 10 characters.
<i>Serving Size</i>	Prints up to 25 characters.
<i>Energy (kJ)</i>	Prints up to 6 characters: numbers 0-9.
<i>Protein</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Fat</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Saturated</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Carbohydrate</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Sugars</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Sodium</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Ingredients</i>	Prints up to 875 characters.
<i>Allergens</i>	Prints up to 50 characters.
<i>Barcode</i>	Prints a UPC-A, EAN-8, EAN-13, Code 30 Barcode.
<i>Must Use By</i>	Prints the date in MM/DD/YY format.
<i>Net Weight</i>	Prints up to 8 characters.
<i>Price</i>	Prints up to 7 characters: numbers 0-9, period, dollar, cents, Euro, pound, and yen signs.
<i>Store Address</i>	Prints up to 45 characters on Line 1 Prints up to 45 characters on Line 2

Store Name

Description 1
Description 2

NUTRITION INFORMATION

Servings per pack

Serving Size

	Quantity per Serve	Quantity per 100g
Energy (kJ)		
Protein (g)		
Fat - Total (g)		
-Saturated (g)		
Carbohydrate - Total (g)		
-Sugars (g)		
Sodium (mg)		

(INGREDIENTS) Lorem ipsum dolor sit amet, consectetur adipiscing elit. Sed varius laoreet lacus vel fringilla. Duis lacinia sem tortor, sit amet dapibus erat fermentum. Lorem ipsum dolor sit amet
(ALLERGENS) Lorem ipsum dolor sit amet, consectetur



MUST USE BY MM/DD/YY
Net Weight Price
STORE ADDRESS LINE 1
ADDRESS LINE 2/PHONE NUMBER

Format 43

Prints 2.2" wide x 4.0" long labels.

Enter the following information for each field:

Field	Description
<i>Description 1</i>	Prints up to 23 characters.
<i>Store Name</i>	Prints up to 17 characters.
<i>Store Address</i>	Prints up to 45 characters on Line 1 Prints up to 45 characters on Line 2
<i>Servings per pack</i>	Prints up to 10 characters.
<i>Serving Size</i>	Prints up to 25 characters.
<i>Energy (kJ)</i>	Prints up to 6 characters: numbers 0-9.
<i>Protein</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Fat</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Saturated</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Carbohydrate</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Sugars</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Sodium</i>	Prints up to 6 characters: numbers 0-9 and period only.
<i>Ingredients</i>	Prints up to 875 characters.
<i>Allergens</i>	Prints up to 50 characters.
<i>Must Use By</i>	Prints the date in MM/DD/YY format.
<i>Price</i>	Prints up to 7 characters: numbers 0-9, period, dollar, cents, Euro, pound, and yen signs.

Description 1

Store Name

STORE ADDRESS LINE 1
ADDRESS LINE 2/PHONE NUMBER

NUTRITION INFORMATION

Servings per pack

Serving Size

	Quantity per Serve	Quantity per 100g
Energy (kJ)		
Protein (g)		
Fat - Total (g)		
-Saturated (g)		
Carbohydrate - Total (g)		
-Sugars (g)		
Sodium (mg)		

INGREDIENTS:
Lorem ipsum dolor sit amet, consectetur adipiscing elit. Sed varius laoreet lacus vel fringilla. Duis lacinia sem tortor, sit amet dapibus erat fermentum. Ut ut tellus et urna finibus dictum. Vivamus non diam in urna semper eleifend. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Sed

ALLERGENS:
Lorem ipsum dolor sit amet, consectetur adipiscing elit. Sed varius laoreet lacus vel fringilla. Duis lacinia sem tortor, sit amet dapibus erat fermentum. Ut ut tellus et urna finibus dictum. Vivamus non diam in urna semper eleifend. Lorem

MUST USE BY
MM/DD/YY
Price

AMERICAS

170 Monarch Lane
Miamisburg, OH 45342
937 865 2123 (direct)
Tel +800 543 6650
(8:00 a.m. – 6:30 p.m., EDT)
Fax +937 865 6663

ASIA

No. 7 Chun Ying Street
Tseung Kwan O Industrial Estate
New Territories, Hong Kong
Tel +852 2372 3169
Fax +852 2995 0014

WESTERN EUROPE

1 Thomas Road
Wooburn Green
Bucks HP10 0PE
Tel +(44) 1628 859500
Fax +(44) 1628 859567

ASIA PACIFIC**NEW SOUTH WALES**

61 Vore Street
Silverwater NSW 2128
Tel +(02) 9647 1833
Fax +(02) 9647 1914
Toll free (Outside Sydney only)



Printer and
Fastener Solutions